


Balkon Stalowe projekty Balustrada zewnętrzna Garden Deck Black Metal Metal Patio Metal Mesh Rail

Nazwa produktu	Metalowa poręcz pokładowy	Standardowy rozmiar	H 11 m * w 1,2 m
Limitować wysokość	2 m.	Grubość rury	1,2-2,5 mm.
Rozpoczęcie partii	20 m lub 20□	Miejsce produktu	Prowincja Guangdong, Chiny
Materiał	Stal	Metoda obliczania cen jednostek	Wysokość poniżej 1,2 m w metrach, wysokość powyżej 1,2 m na placu
Rzemiosło	zmontowany i spawany	Obróbka powierzchniowa	Malowana proszkowo



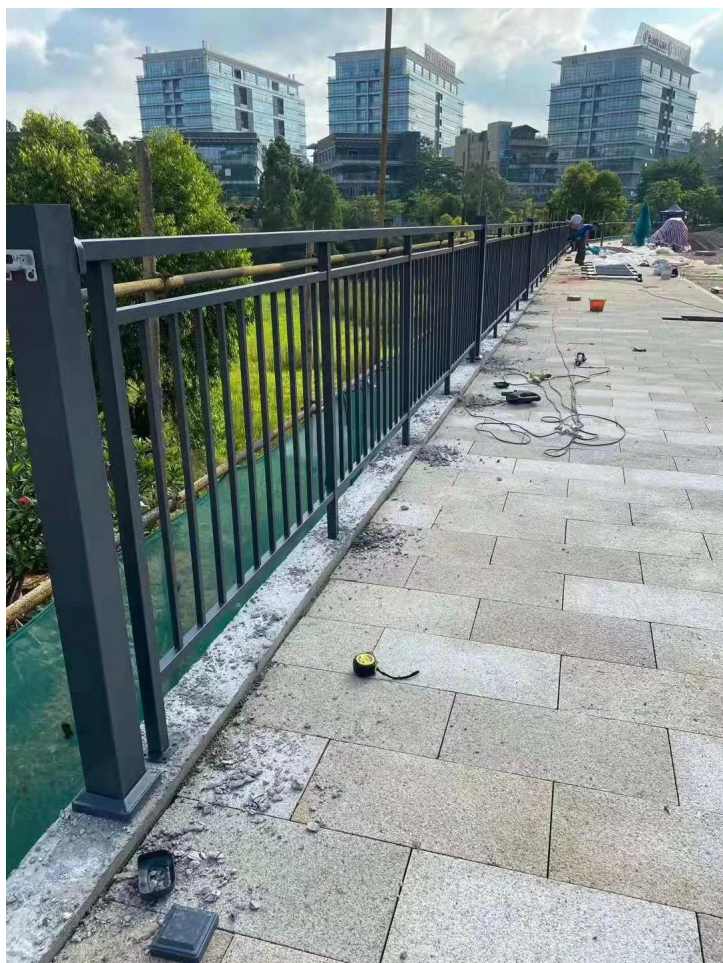

Montaż:














Przewodniki instalacji:

Guard Rail Assembly Instructions

Tools Required: Electrical Power Drill
(Impact Drill Preferred)

Overview: Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.




² Double check posts are parallel and tight against inside rail before marking holes for drilling.

¹ Inside rail will be loose until each post is secured to the ground.

³ Push and pull top rail & inside rail to ensure all is secure.

Produkcja i opakowanie z klatka schodowa stal poręczewna szwarsztat:



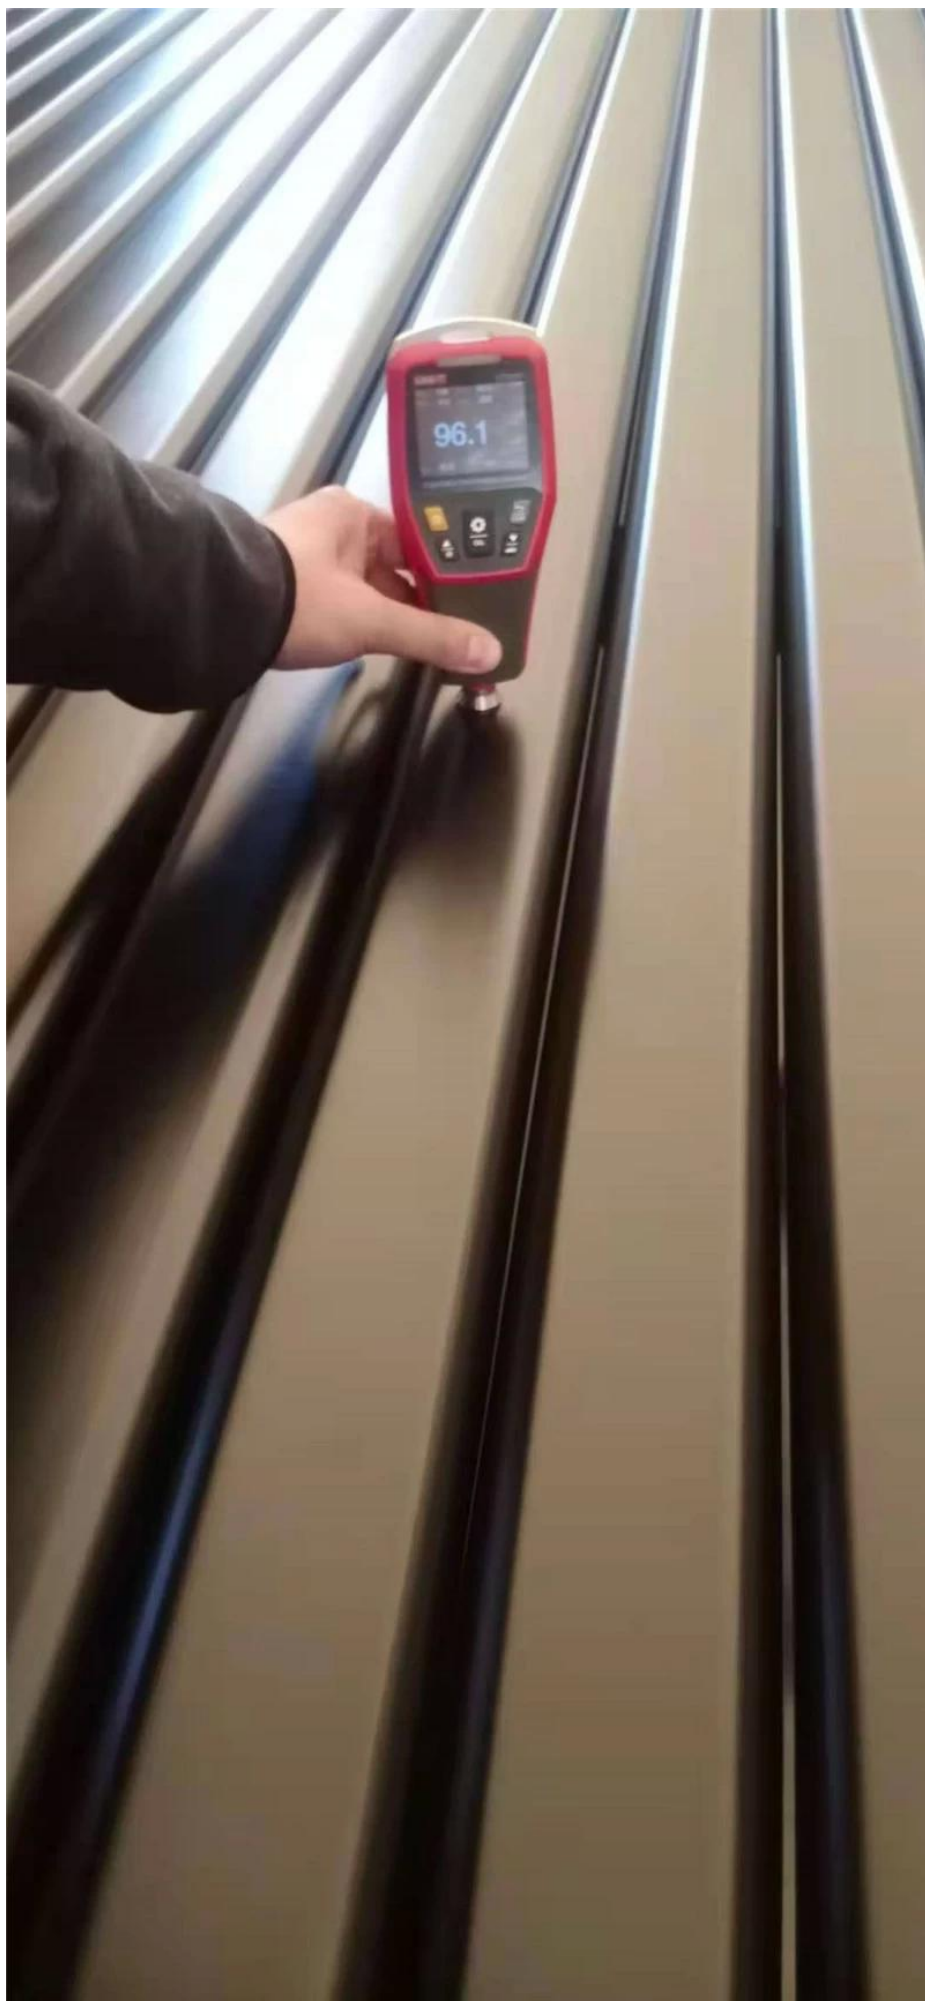





Proszę zobaczyć kontaktnas dla jeszcze Detale:

Kontakt: Przeddzień

E-mail:sales03@launch-china.cn.

HP / Whatsapp:+8613686807796.