

本公司生產之玻璃合頁，係採用最優良之材料，經精密加工而成，其構造簡單，安裝容易，且能自動緩衝，防止玻璃門在關閉時產生碰撞，保護玻璃門不受損傷。本公司生產之玻璃合頁，已通過ISO9001國際認證，品質優良，價格公道，歡迎各界人士垂詢。

- 90° 玻璃合頁
 鋼 304

- 13.52-8 玻璃合頁

1000 : 玻璃合頁 玻璃合頁 玻璃合頁 玻璃合頁 / 45 : 玻璃合頁 玻璃合頁 玻璃合頁 玻璃合頁 -

2100 : 玻璃合頁 玻璃合頁 玻璃合頁 -




979 : 玻璃合頁 玻璃合頁 -

B-90 B-180 Hydraulic Buffer Glass Door Hinges' Specification

Application range & glass door parameters :

1. This series of hydraulic glass hinge is suitable for tempered glass door without frame .
2. Suitable for MAX door height $\leq 2100\text{mm}$
3. Suitable for MAX door width $\leq 1000\text{mm}$
4. Glass door thickness : 8-12mm
5. Maximum bearing weight of 45KG/2PCS

Glass door open cut reference graph (figure 1B -90 figure 2B - 180)




After the glass cut , it must be treated with steel processing ,make sure the installation angle between the glass door and the ground is 90°when you install it .

The hydraulic glass door hinge can be adjusted for closing strength for 1 .2 .3 degree

Note:the door must be completely closed before you need to adjust the closing strength .

The regulation method is as follows :

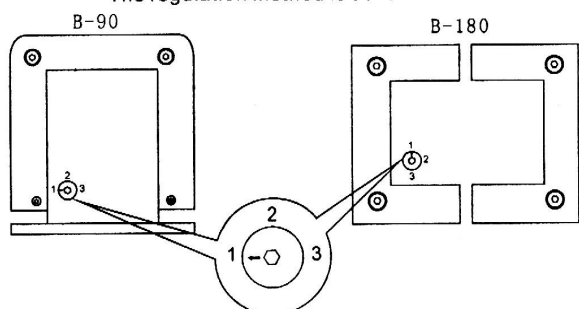

(Twist the arrow to the position of desire strength)

