

本公司提供各種規格之鋼索夾具，適用於各種鋼索之固定與連接。本公司之鋼索夾具，均採用高品質之材料，並經過嚴格之品質檢驗，確保其使用之安全與耐用。本公司之鋼索夾具，可適用於各種不同之鋼索規格，且其設計簡潔，安裝方便，為鋼索工程之理想選擇。

本公司提供之鋼索夾具，其規格如下：

- 鋼索夾具之長度為 90 公分 - 100 公分
- 鋼索夾具之重量為 1000-1500 公克
- 鋼索夾具之厚度為 60 公分 - 80 公分
- 鋼索夾具之材質為 304 不銹鋼 / 316 不銹鋼
- 鋼索夾具之表面處理為拋光 / 噴砂 / 噴漆
- 鋼索夾具之安裝方式為 90 度 / 180 度





00000 0000000 0000000 0000 00 0000 180 0 0000 90 00000 000 00000 -




□□□□□□□□ □□□□ □□□□ □□□□□□ □□□□ □□□□) □□□□ 90 □□□□ □□ □□□□□) -



□□□□□□□□ □□□□ □□□□ □□□□ □□□□□

HINGE PARTS

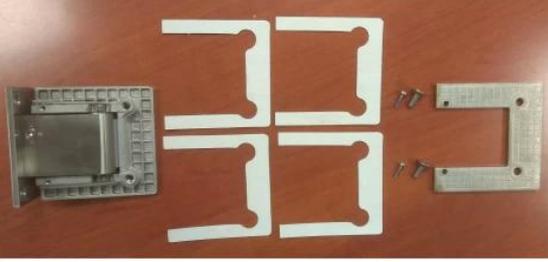

STEP 1 - LINE UP THE MAIN BODY OF THE HINGE ALONG THE DESIGNATED SLOT OF THE ACRYLIC DOOR



NOTE: REFER TO THE PICTURE BELOW AFTER THE DOOR IS INSTALLED.

THE ADJUSTMENT TO THE CLOSING SPEED WILL ALREADY BE SET, NO NEED TO ADJUST



MAKE SURE THE SCREW HEADS FACE INSIDE THE ROOM WHEN ATTACHING THE DOOR.

MAIN BODY CONFIGURATION



TOP HALF CONFIGURATION



STEP 2 - SANDWICH THE ACRYLIC WITH THE TOP HALF OF THE HINGE, ALIGNING WITH THE MAIN BODY



STEP 3 - INSERT THE BOLTS AND TIGHTEN WITH A 4mm HEX KEY



□□□□ □□ □□□□ □□□□ □□-



