


Figure 1 shows the technical drawing of a mechanical part. The part consists of a cylindrical base with a diameter of  $\phi 50$  and a height of 30. A vertical shaft is attached to the top of the base, with a diameter of  $\phi 14$  and a total height of 100. The shaft has a threaded section at the top with a diameter of M12. The distance from the top of the base to the start of the threaded section is 12. The drawing is a front view, showing the part's profile and dimensions.

Figure 1 shows the technical drawing of a mechanical part. The part consists of a cylindrical base with a diameter of  $\phi 50$  and a height of 30. A vertical shaft is attached to the top of the base, with a diameter of  $\phi 14$  and a total height of 100. The shaft has a threaded section at the top with a diameter of M12. The distance from the top of the base to the start of the threaded section is 12. The drawing is a front view, showing the part's profile and dimensions.



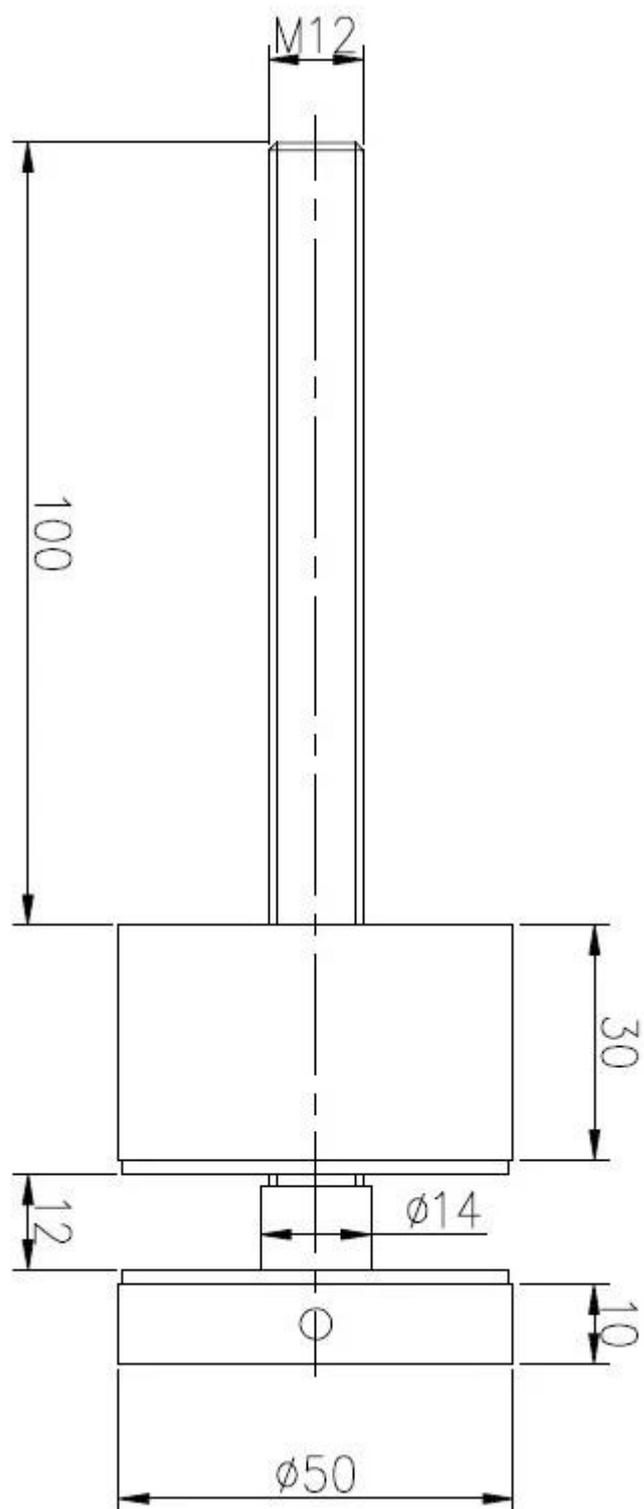

SF-30



SF-50



SF-50T

