

Shenzhen Launch stellt ein einfach zu installierendes Zinkstahl-Leitplankensystem für den Außenbereich her. Wir bieten komplette Armaturen an, damit Kunden die Installation problemlos durchführen können.

Merkmale des äußeren Zinkstahl-Leitplankensystems

Material	Verzinkter Stahl oder Aluminium
Fertig	schwarze Farbpulverbeschichtung
Größe	Oberer Handlauf 80 * 40mm; 40 * 40 mm Pfosten, 12 * 12 mm vertikale Schienen, 32 * 32 mm Mittelschiene
Versammlung	einfach DIY
MOQ	1 Meter

Außenverzinkungssystem aus Zinkstahl, Musterset -







Montageanleitung für das Zinkstahl-Leitplankensystem aus Zink

Guard Rail Assembly Instructions

Tools Required: Electrical Power Drill
(Impact Drill Preferred)


Overview: Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.

- 1** Roughly position the 2 posts.
 - 2** Put the post base caps on without securing them.
 - 3** Secure top rail & post with brackets - 4 screws each.
 - 4** Add the ends to the top rail.
 - 5** Secure inside rail with brackets - 2 screws each.¹
 - 6** Position whole rail. Mark the 4 holes on each post.
 - 7** Remove hand rail, drill holes straight down, and hammer in bolts.²
 - 8** Put hand rail over bolts, tighten nuts onto bolts.
 - 9** Insert the vertical railings.
 - 10** Secure all of the inner rail.³
- ¹ Inside rail will be loose until each post is secured to the ground.
- ² Double check posts are parallel and tight against inside rail before marking holes for drilling.
- ³ Push and pull top rail & inside rail to ensure all is secure.

Produktionsfotos des äußeren Zinkstahl-Leitplankensystems-






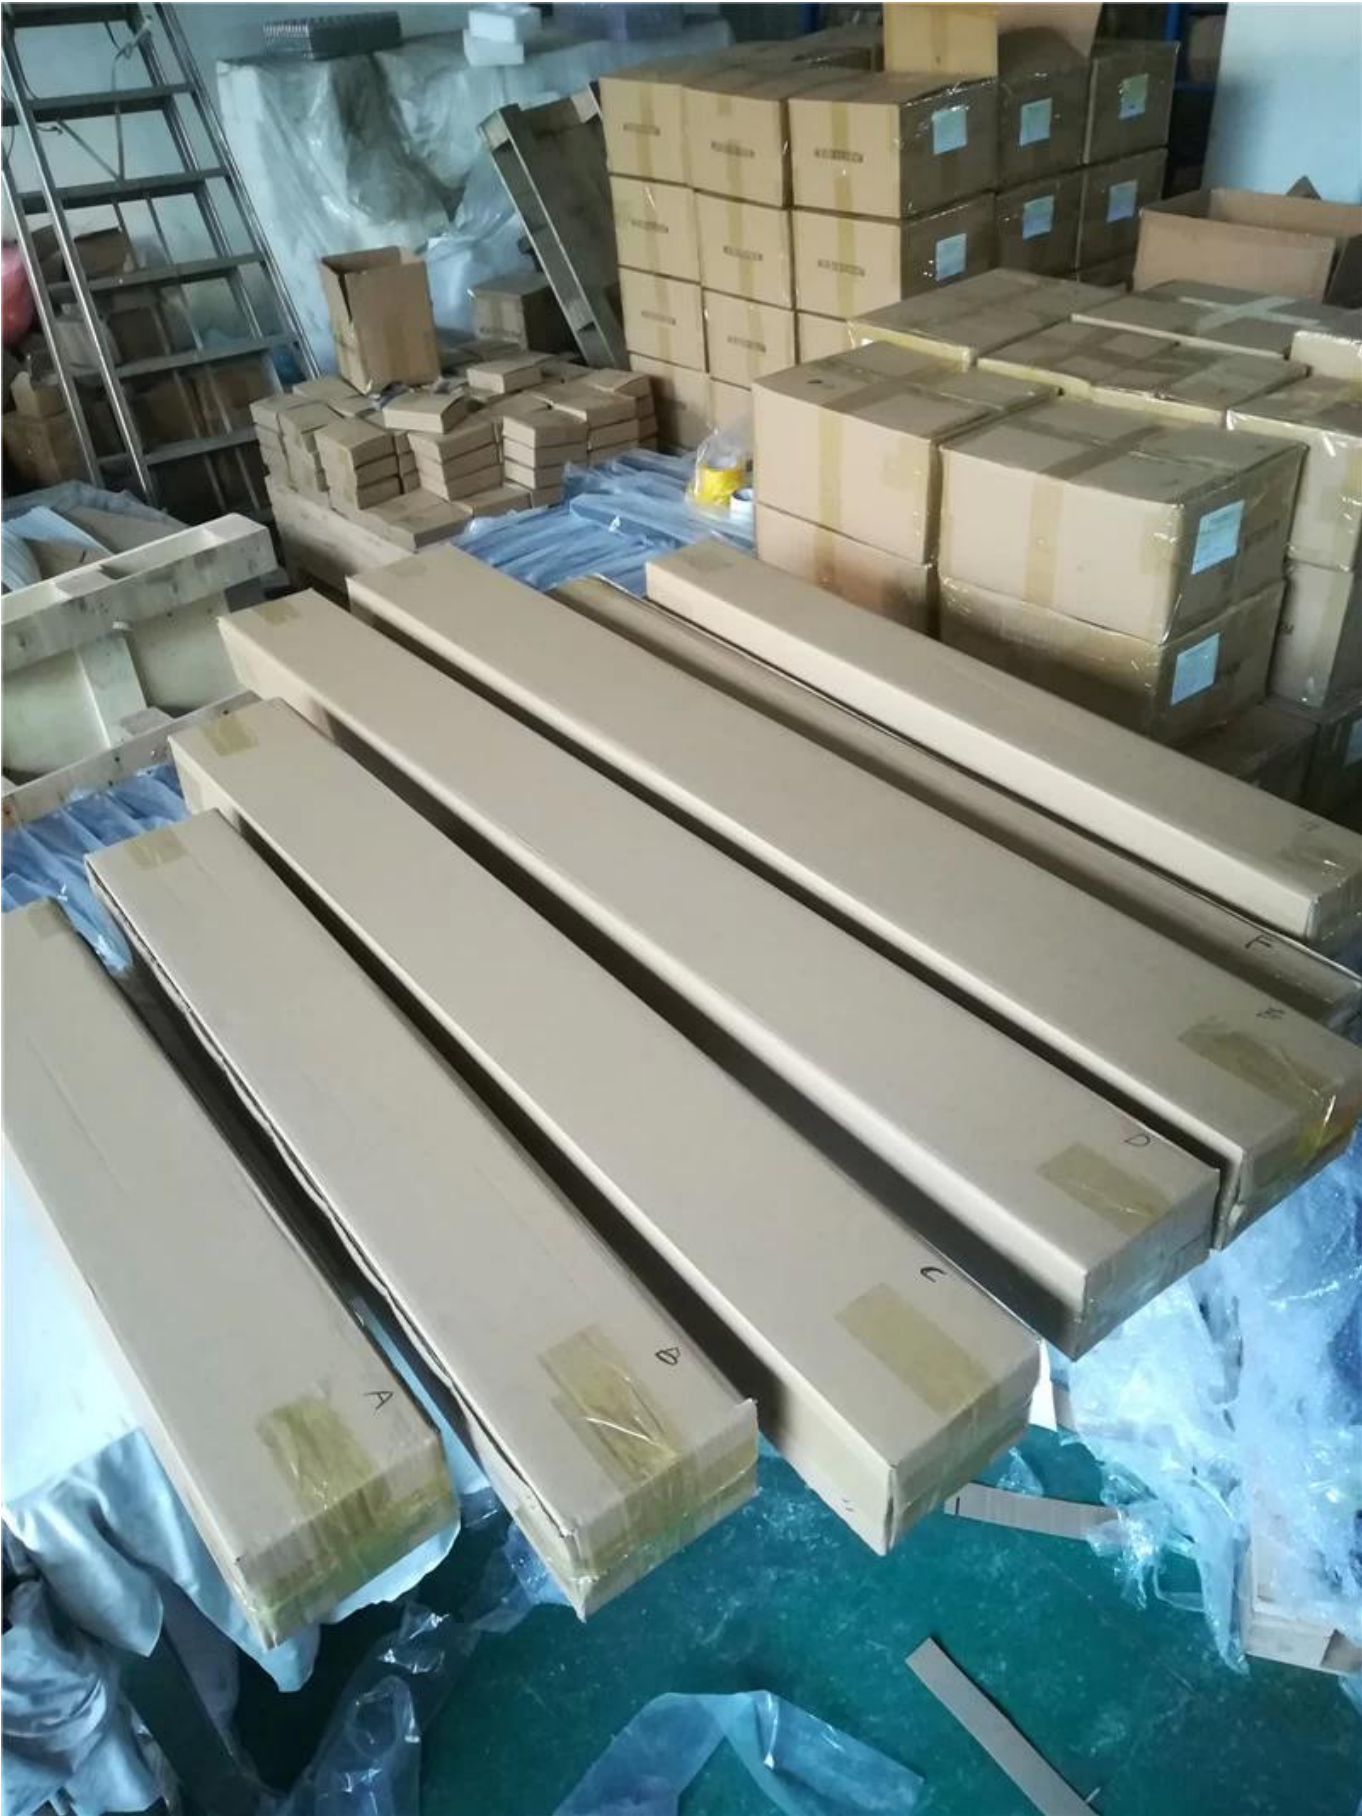






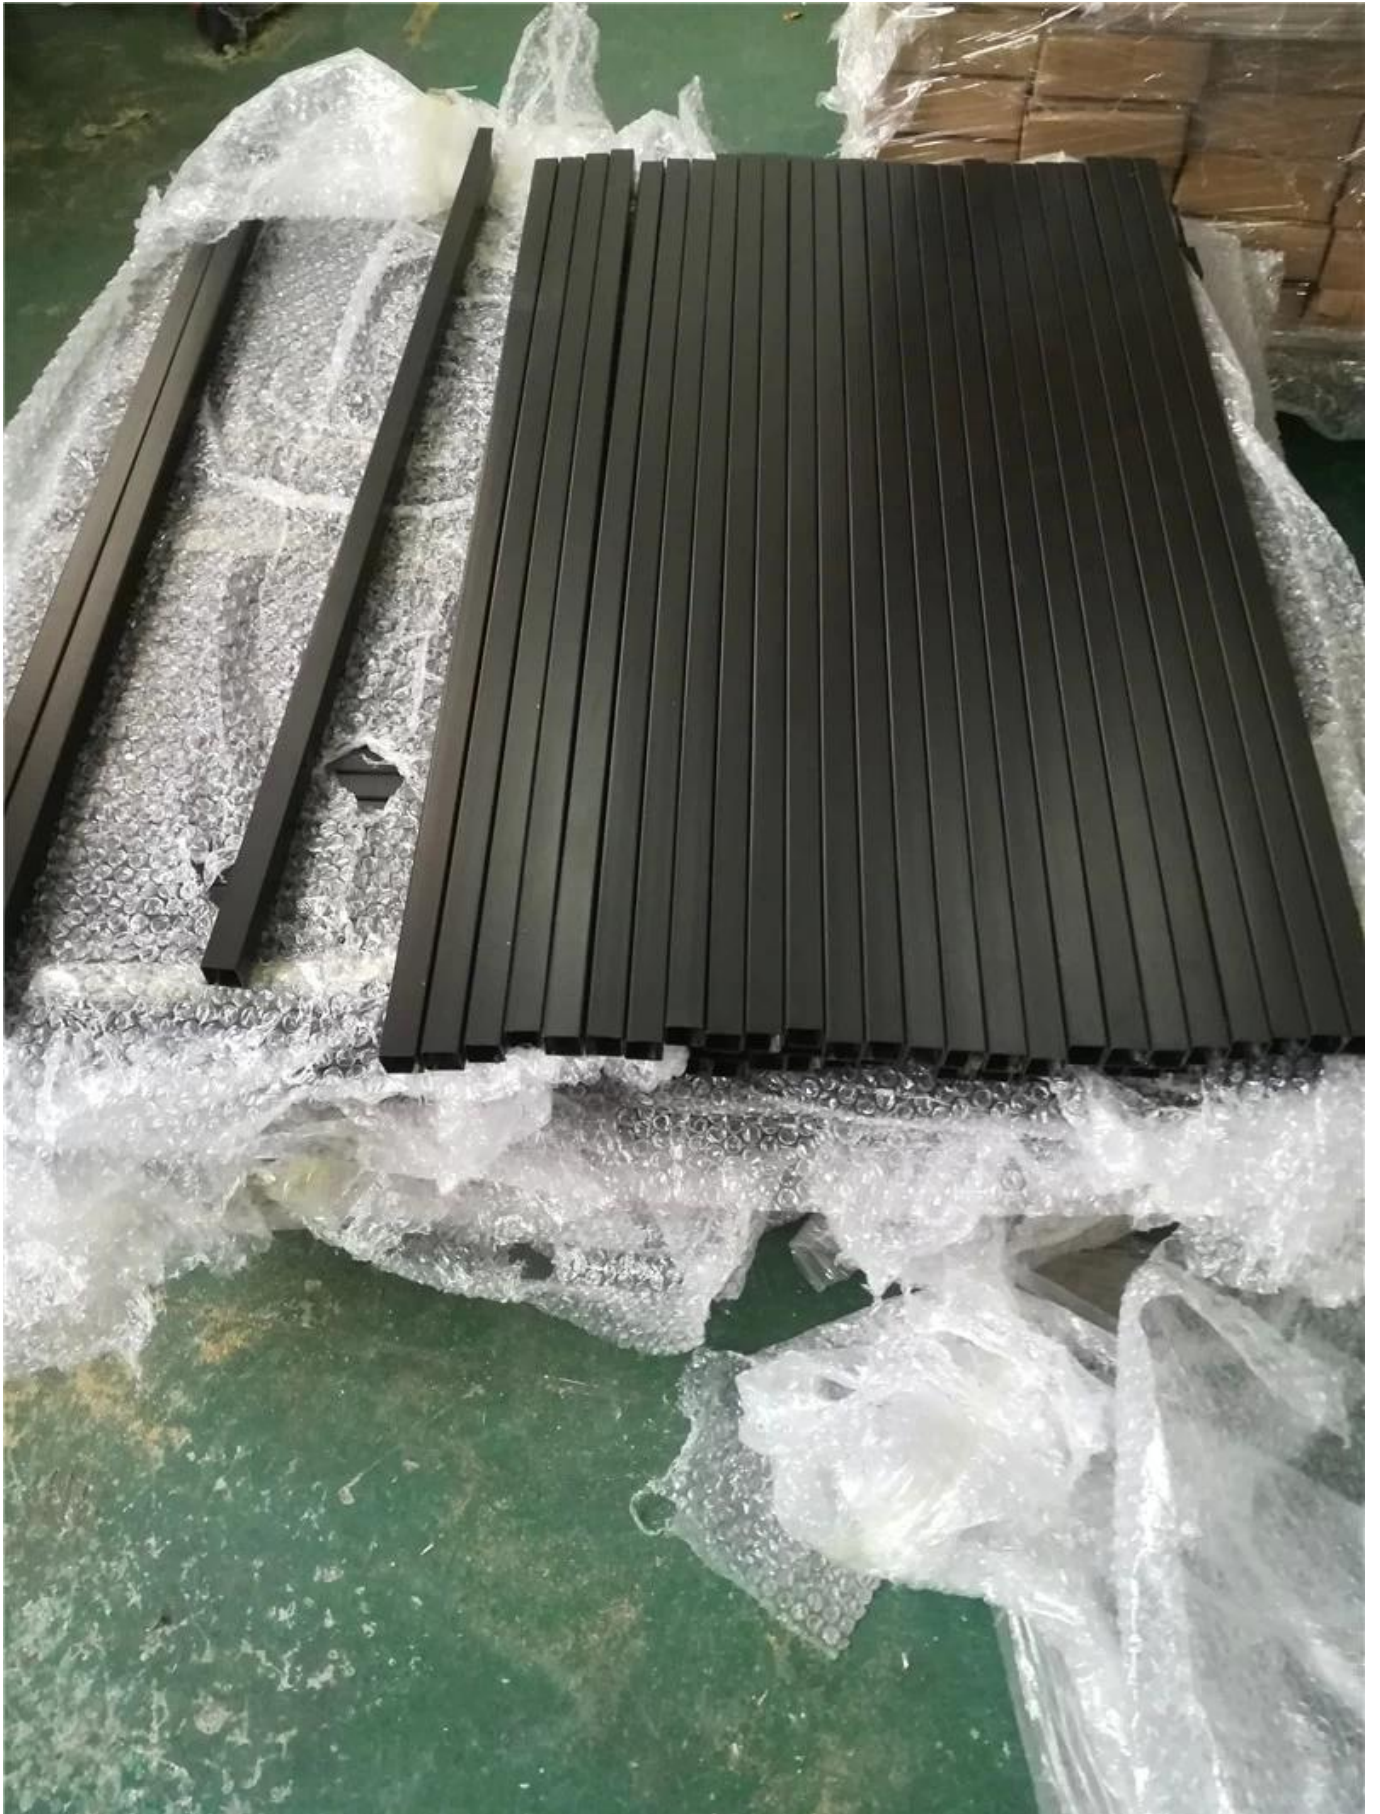

Leitplankengalerien -

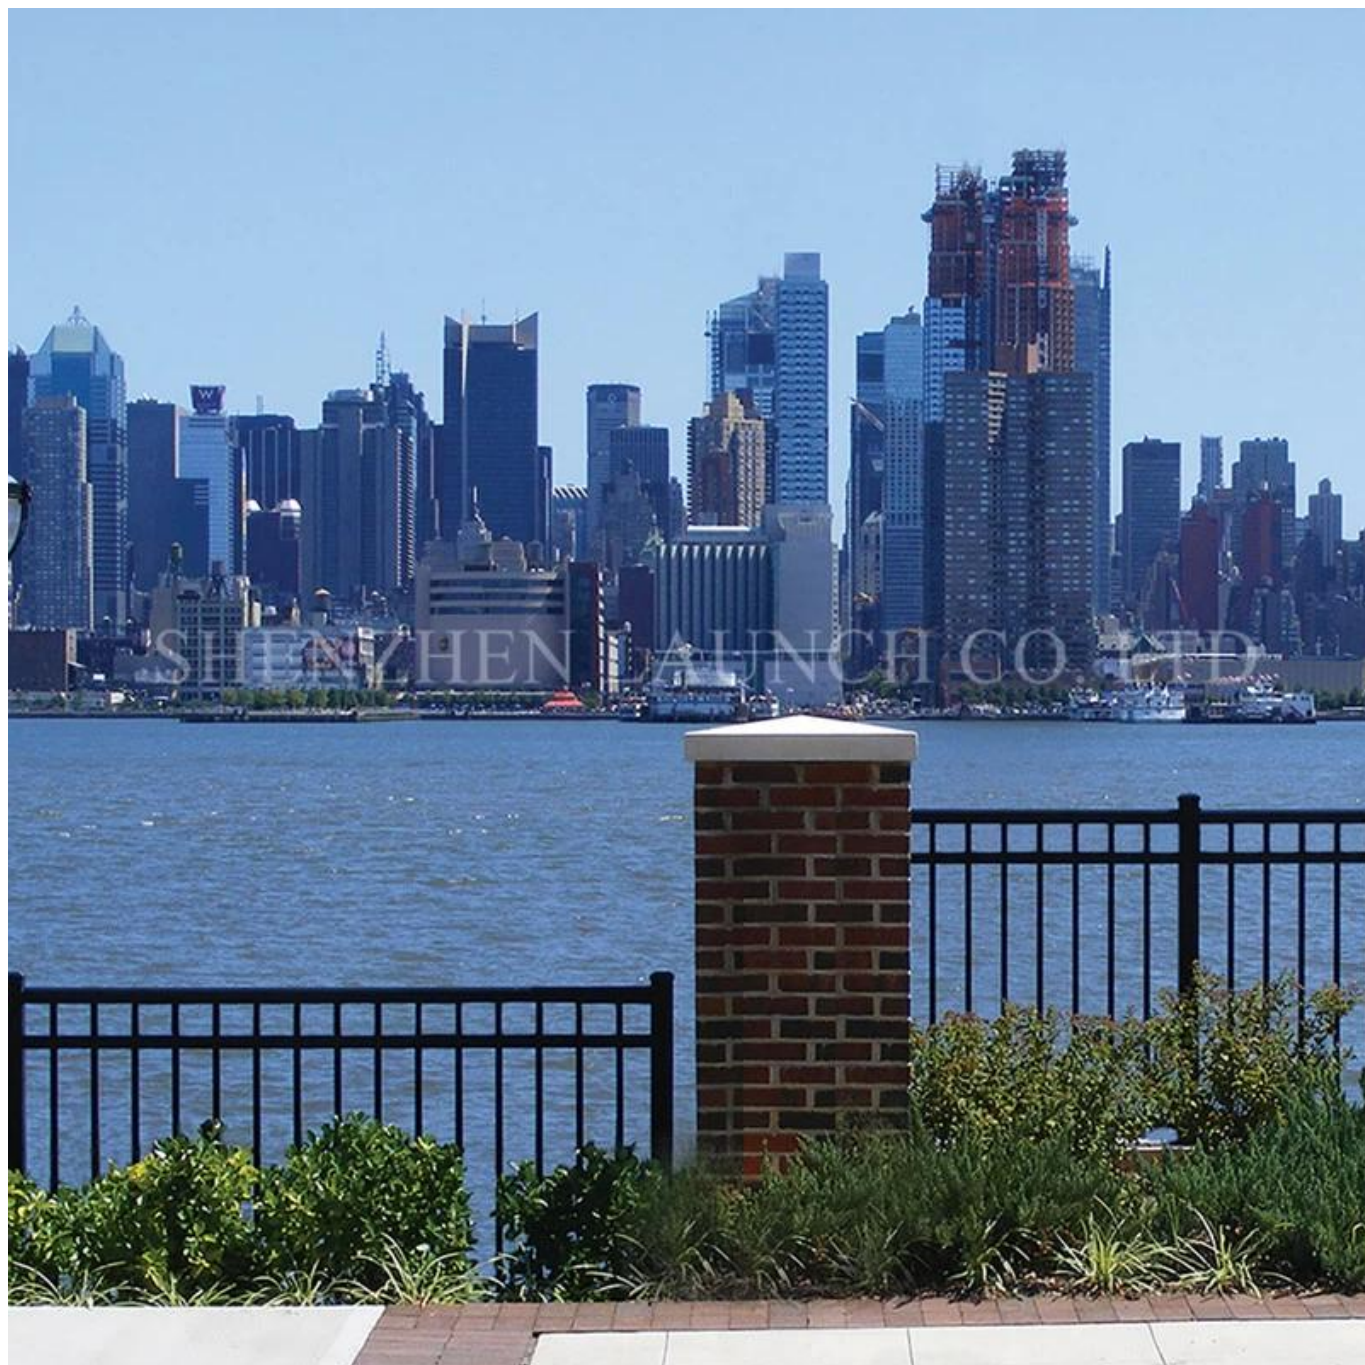



www.chinabalustrade.com

