


## Hot-Dip Galvanisierte Schmiedeeiserne Balkon Safety Zaun Sicherheit Stahlgeländer Balkon Balustrasse

Produktname	Galvanized Steel Railing.	Normale Größe	H 1,1 M * W 1,2 m
Höhe hoch begrenzen	2 M.	Schlauchdicke.	1,2-2,5 mm
Beginn der Stapel	20 m oder 20□	Produktort.	Guangdong-Provinz, China
Material	Stahl	Einheitspreisberechnungsmethode	Höhe unter 1,2 m in Metern, Höhe über 1,2 m im Quadrat
Handwerk	zusammengebaut und geschweißt	Oberflächenbehandlung	Pulverbeschichtet





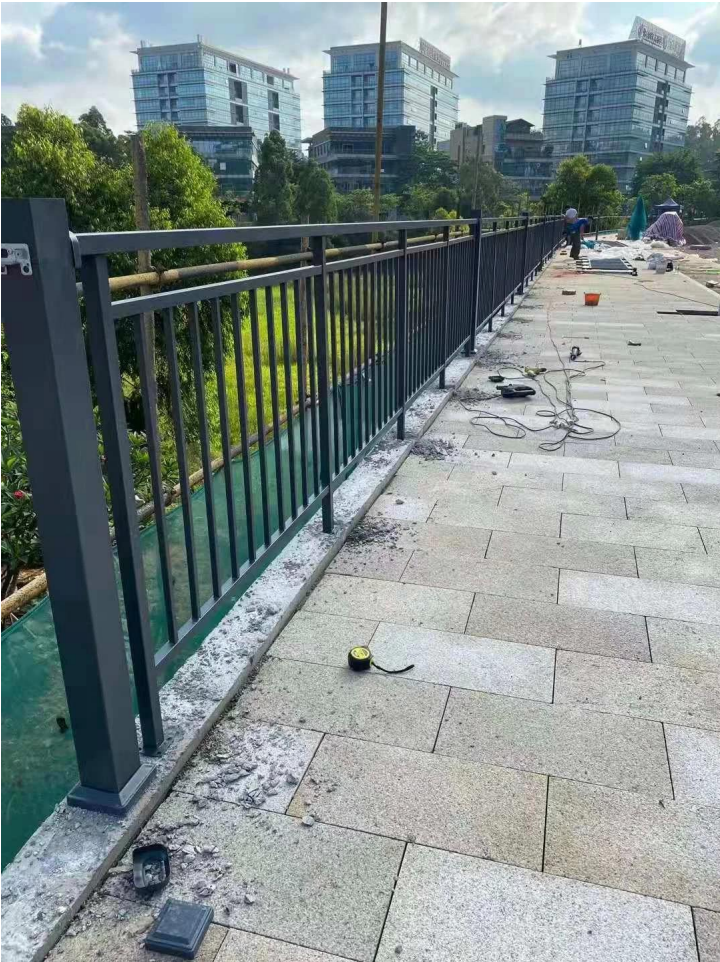

**Montage:**














**Installationsführer:**

# Guard Rail Assembly Instructions

**Tools Required:** Electrical Power Drill  
(Impact Drill Preferred)

**Overview:** Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.

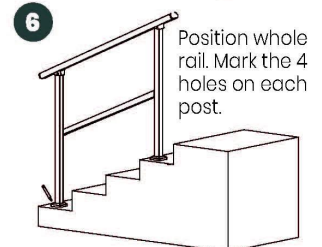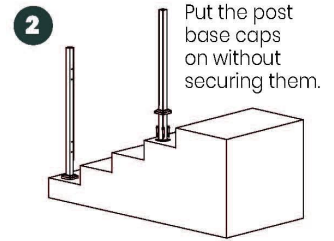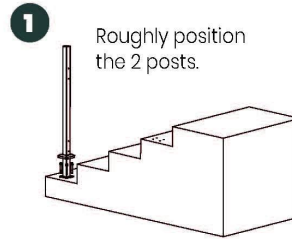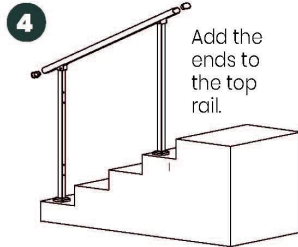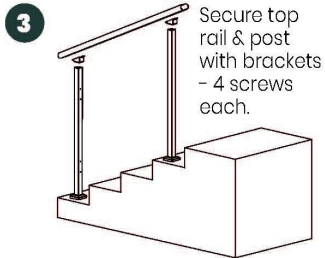


<sup>2</sup> Double check posts are parallel and tight against inside rail before marking holes for drilling.

<sup>1</sup> Inside rail will be loose until each post is secured to the ground.

<sup>3</sup> Push and pull top rail & inside rail to ensure all is secure.

**Produktion&VerpackungvonTreppeStahlHandläufebeiunsereWerkstatt:**



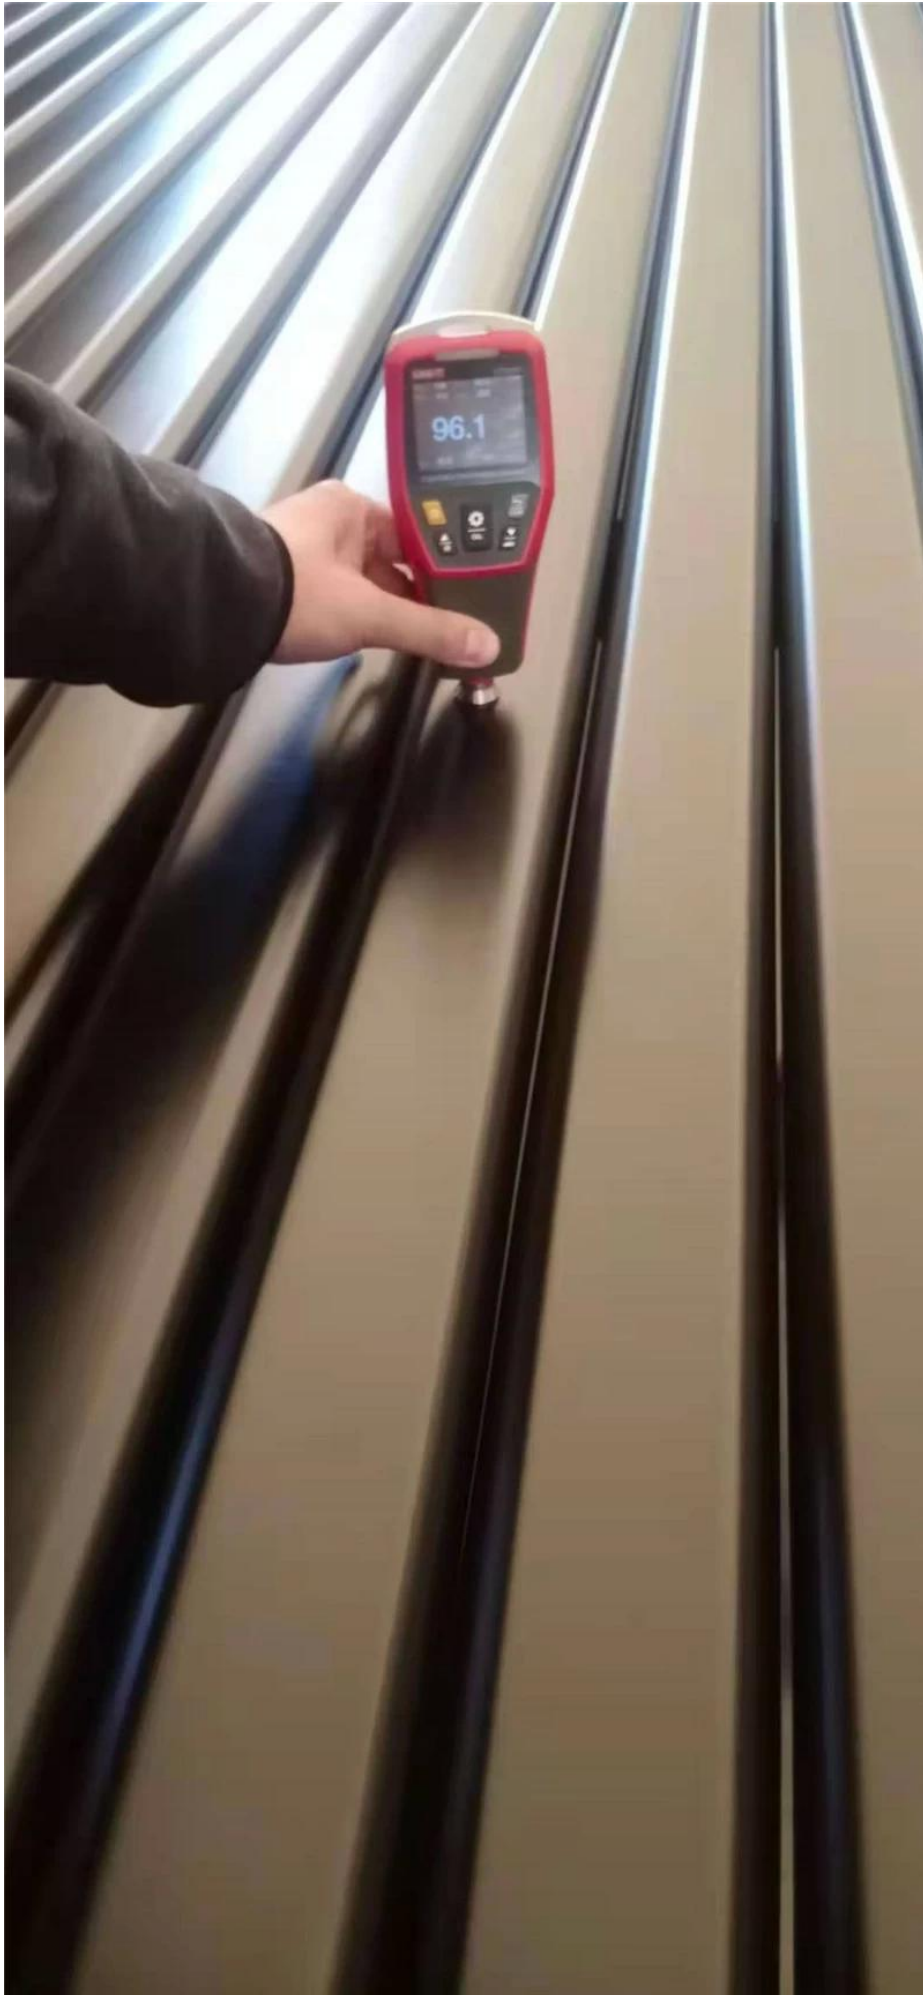







**Bitte Gefühlkostenlos zu Kontakt uns zu mehr Einzelheiten:**

**Kontakt: Vorabend**

**Email:sales03@launch-china.cn.**

**HP / WhatsApp:+8613686807796.**