


Balcón Funda de vidrio Soportes de montaje de vidrio DUPLEX 2205 Material para uso en exteriores para barandas de cristal de 1/2 ".

1. Características de los soportes de montaje de vidrio del piso de la cerca del balcón.

Material	Dúplex 2205
Terminar	satinado cepillado
Altura	168mm
Espesor de vidrio	Vidrio de 10-13.52mm de espesor.
Altura	168mm; o puede ser personalizado
Junta de plástico	Hecho de material de nylon, puede durar tiempo de por vida.
Tornillo de hormigón para adaptarse	M8 * 100
Peso de la unidad por PC	1.42kg
En stock	sí
Moq	2 piezas

2.DimensionesdeSbmSoportes de montaje de vidrio-

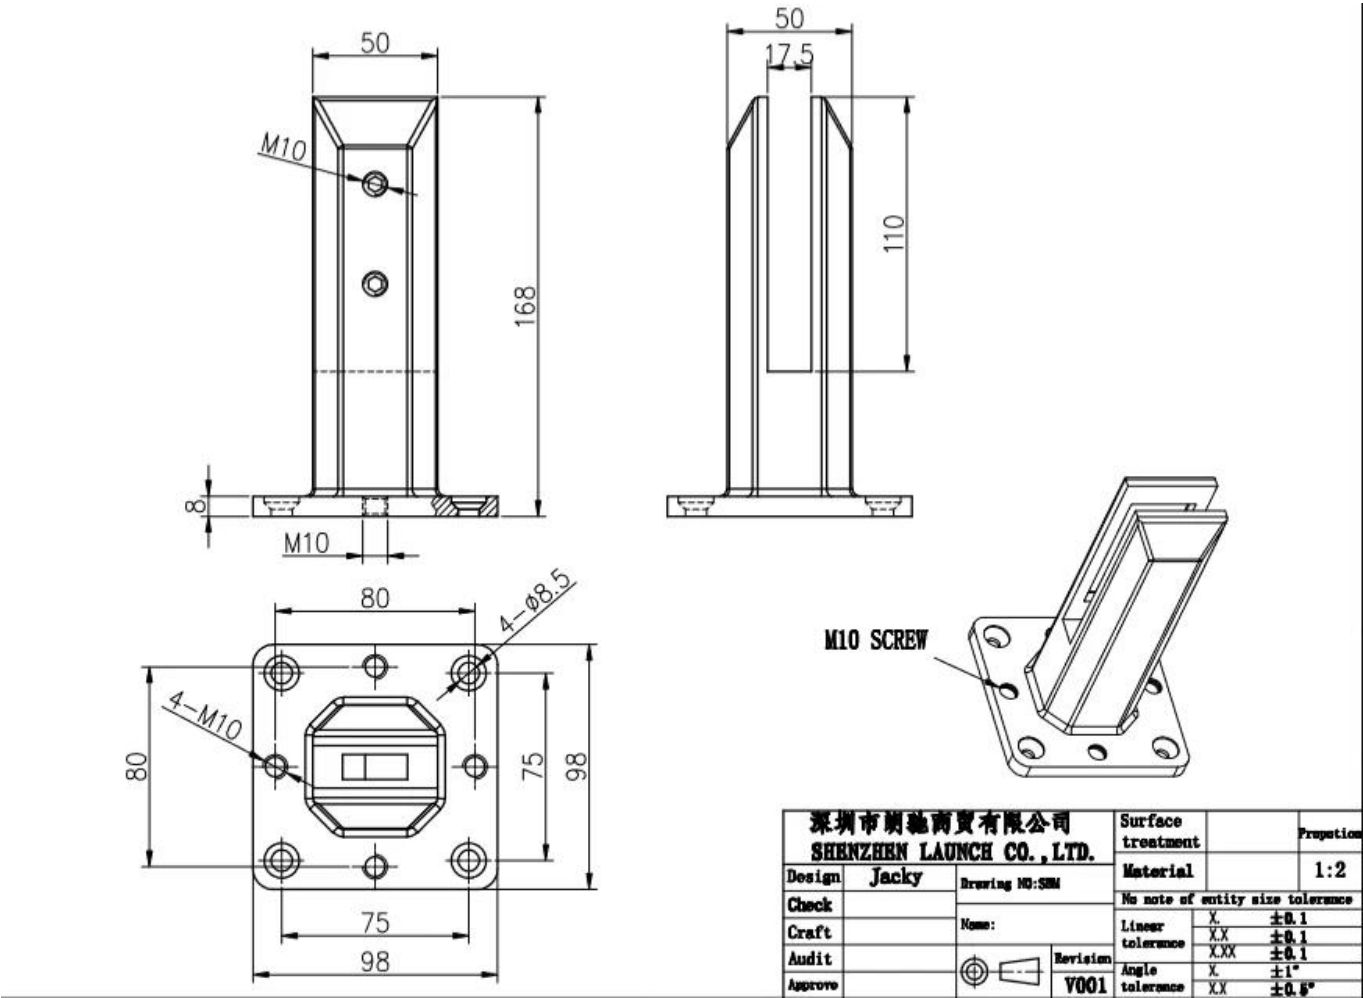

3.Cargandoprueba&MaterialpruebaporSbmSoportes de montaje de vidrio-



LOADING TEST FOR SBM

Introduction

MTS Metallurgical Testing Services was engaged to witness the installation of a sample pool fence spigot and to subsequently conduct load tests on the spigot to the requirements of Australian Standard AS1926.1 - 2012.

Standard/Specification AS 1926.1 - 2012, Section 3.2 and Appendix B

Results Summary

(For details of individual tests, refer to the tables on the following pages.)

ID	Item/Heat No.	Dimensions/Type/Details	Finish	Overall Assessment
14117/01	SSRM316	60mm Square, Base Plate 316 Stainless steel	316I	COMPLIES

Remarks

After completion of the testing, the spigot was found to be in sound condition with no breakage, tearing or signs of fracture and no looseness of the fixings.

Colin Foxman
Metallurgical Testing Manager



Accreditation No: 15624
Accredited for compliance
with ISO/IEC 17025

Strength Test

Test Specification AS 1926.1 - 2012, Appendix B Test Procedure MTS-TP3.1 Compression Tests - Products

Specimen ID	Observations	Assessment
14117/01	Test Equipment: Hydraulic ram and 10,000 N load cell Test Load: 330N Load Duration: 45 Secs Deflection under load: 1 mm Permanent Deflection after removal of test load: 0 mm	COMPLIES

Requirements No permanent damage or loosening of fixings.



12/16/2020 5:54:18 PM

Method: Fe-30
 Comment: Cr-, Cr/Ni-steel
 Type Standard 18--8

12/16/2020 5:54:09 PM

Type corr.concentr.

Sample Name:

Sample ID:

	C	Si	Mn	P	S	Cr	Mo	Ni
	%	%	%	%	%	%	%	%
< x > (1)	0.0224	0.8873	1.1010	0.0263	0.0032	21.6796	3.0718	5.5691

	Al	Co	Cu	Nb	Ti	V	W	Pb
	%	%	%	%	%	%	%	%
< x > (1)	< 0.0005	0.0797	0.1603	< 0.0002	0.0044	0.0893	0.0305	< 0.0002

	Sn	Sb	B	N	Fe			
	%	%	%	%	%			
< x > (1)	0.0092	< 0.0004	0.0024	0.1024	67.1600			


4.InstalaciónInstruccionesporSbmSoportes de montaje de vidrio



fixing method: base plate spigots

Mark out the centre line of proposed glass fence with a chalk line. Determine clamp location based on a sheet size (recommendation on pages 1 & 2). Use base plate as a template to mark out the hole positions and drill holes to suit.


Note: Do not exceed 100mm gaps between glass panels. Optimum gap is 40mm to 60mm

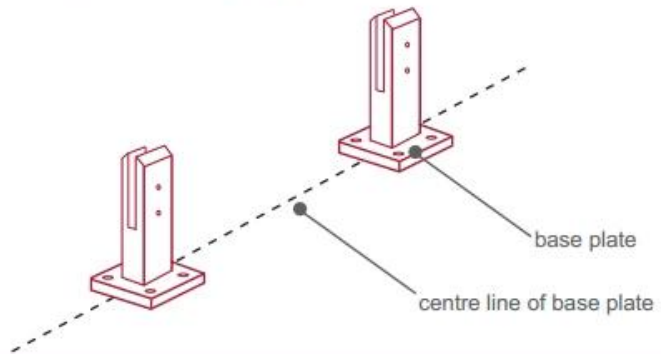

Now the base plated spigots can be fitted to the floor and plumbed via shims (not supplied) under the base plates. Be sure to tighten firmly as the smallest of movement at the base plate will result in noticeable movement at the bottom of the glass fence.


Tip: By setting the two outer spigots of your total span, a string line can be run in the 'throat' of the span, giving correct height for all spigots in between

Note: Do not exceed 100mm gap from the fixing surface to the bottom of the glass

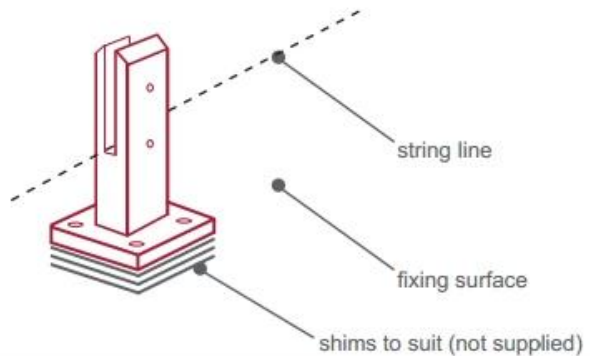

When all spigots are installed, slip domical cover the top of the spigot to hide fixings. It will be necessary to turn the adjustment screws on the spigot face all the way in to allow cover to pass over


Note: Same installation method applies to round base plate spigot

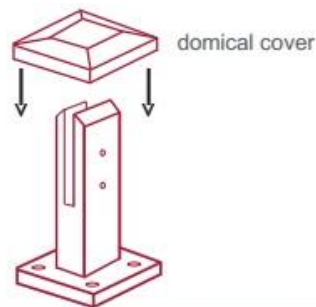

The glass is then installed to the spigots. Place plastic packers between glass & spigot, at no stage should glass touch the metal

How adjustability works:

1. Place glass in spigot
2. Fix/ tension glass both sides with allen key

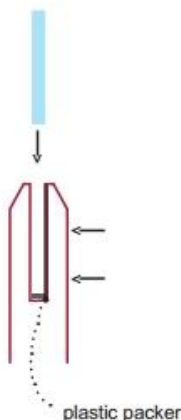


5. Embalaje de detalles por Sbm Soportes de montaje de vidrio-

1 PC en una caja blanca; 12 PC en una cartón-



6.MasaProducciónProcesoporSbmSoportes de montaje de vidrio-



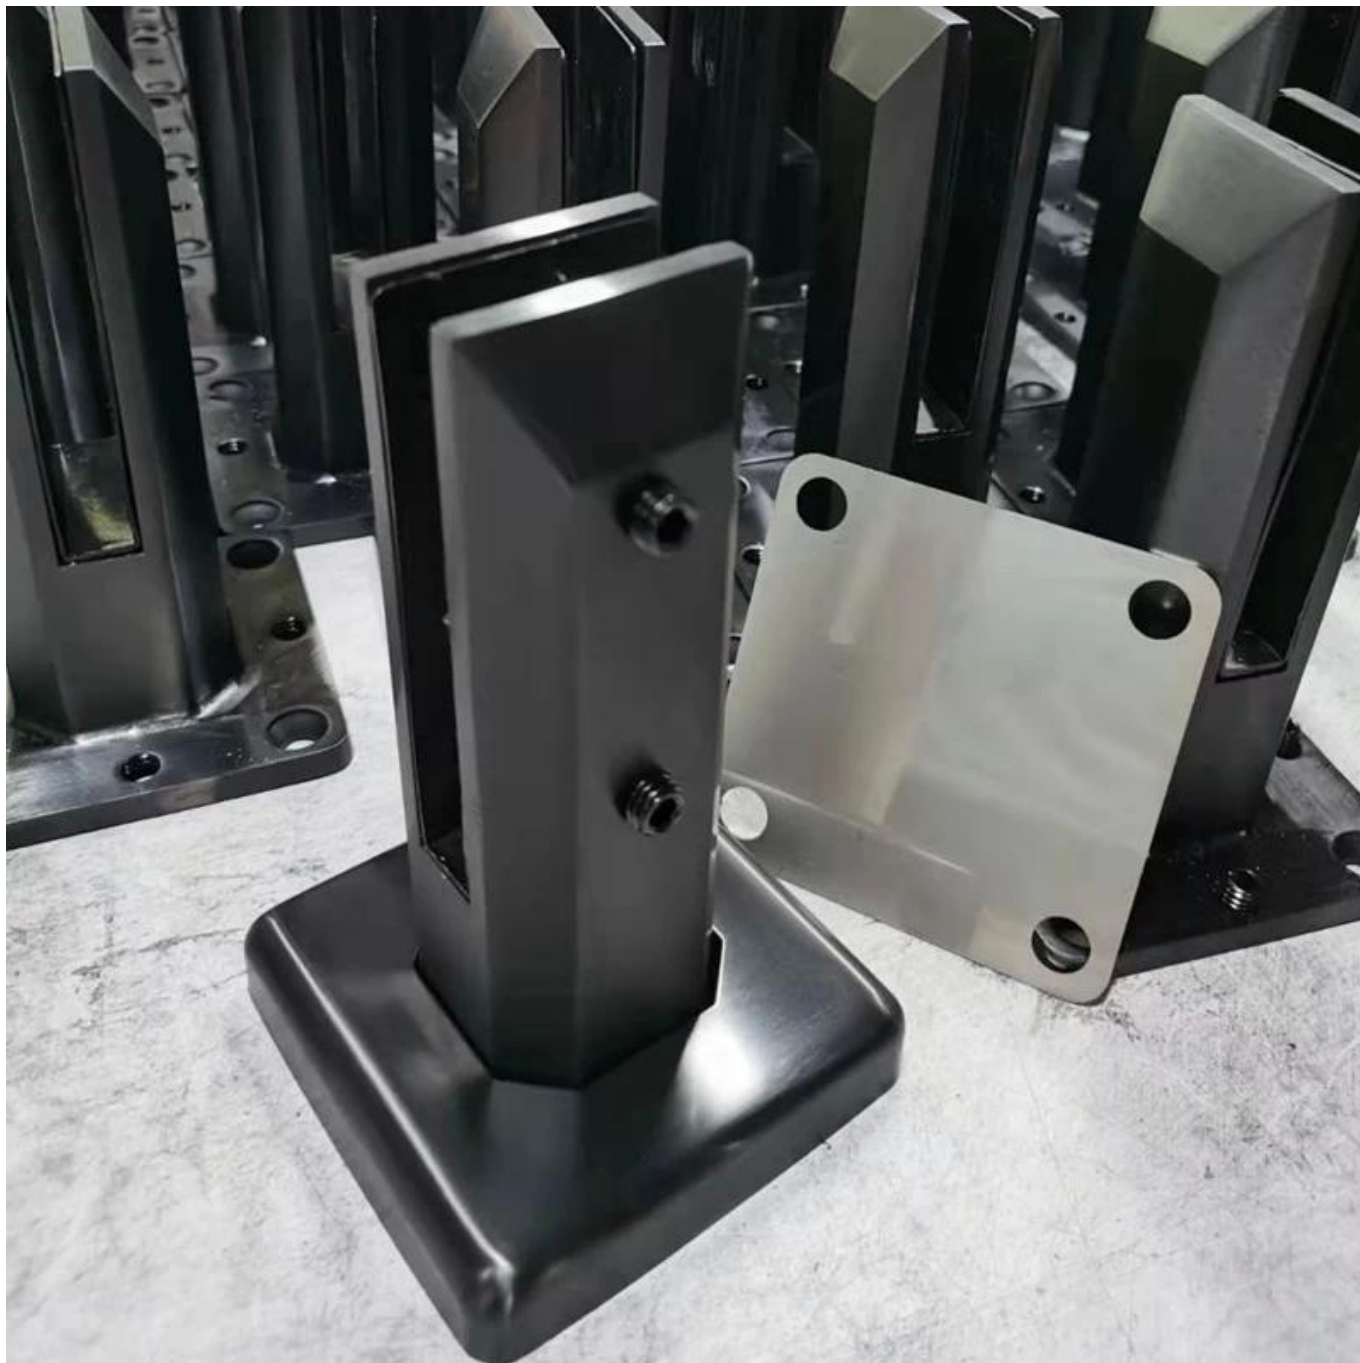

7. Más modelos de vidrio espigaportuselección-





MODEL # SBM



MODEL # SCM



MODEL # RBM



MODEL # RCM


Glass spigot

8. Proyecto Fotografías de Sin marco Vidrio Barandillas con vidrio espiga-







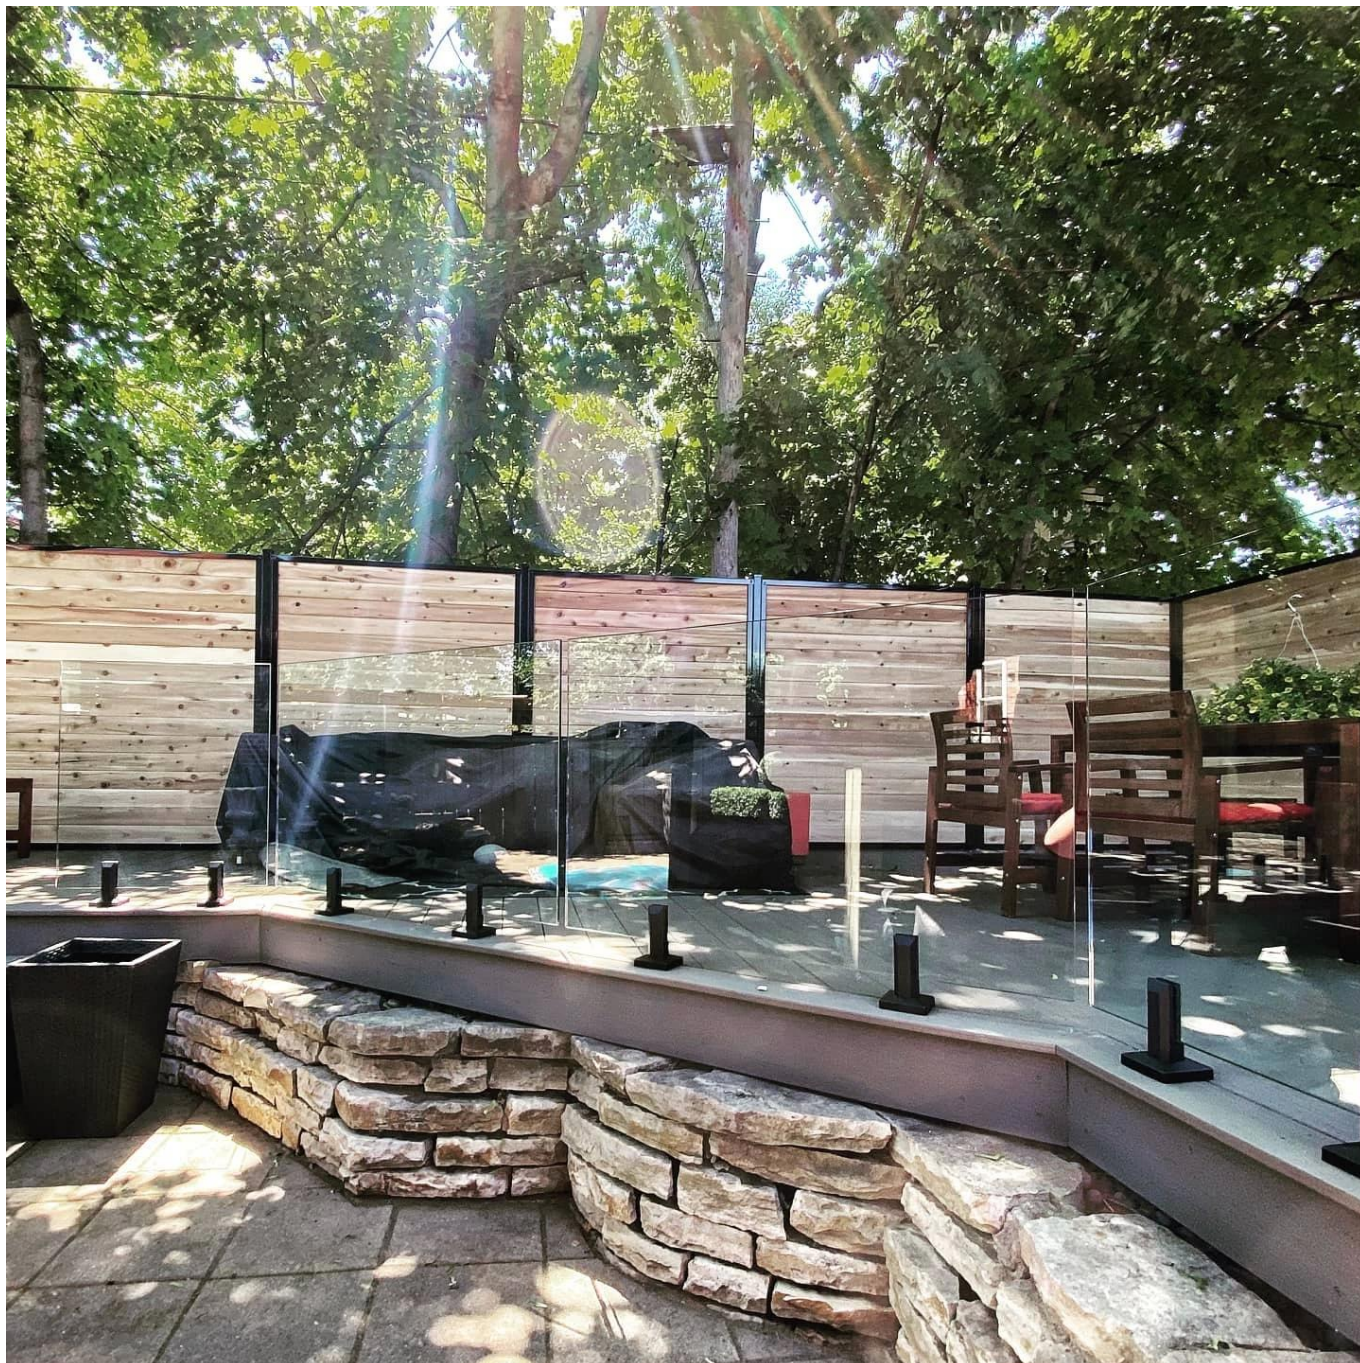

También tenemos bisagras de vidrio y pinzas magnéticas y abrazaderas de vidrio y vidrio templado para ir con todo el sistema de barandilla de vidrio sin marco.

¡Siéntase libre de contactarnos ahora para obtener cotizaciones!

Shenzhen Lanzy Co., Ltd

Verificado por SGS, informe No. 19536352_P + T

Office ADD:

B5-003, 5 / F-Block 3, edificio Yilida, No. 1092 Nanshan Road, Distrito Nanshan, Shenzhen, China, Código Postal 518054

Tel: 86-755-86037559 Fax: 86-755-86372611

MOB (WhatsApp, Wechat, Viber) +86 135 9027 3543

Contacto:CeliaChen