

Shenzhen Lanzamiento Co., Limitado es especializado en el desarrollo y fabricación de alta calificación de metal de edificio material y a partir de 2004, nosotros tenemos nuestra propia fábrica situada en Dongguan. Debajo le haré una introducción más detallada sobre el montaje de vidrio de espiga para la revisión.


Especificaciones del producto

Nombre del producto	Grifo de vidrio de montaje lateral
Material	304SS / 316SS / 316LSS / Dúplex 2205
Acabado de superficie	Espejo / Satinado / Negro mate
Para espesor de vidrio	10-13,52 mm
Solicitud	Valla de piscina, valla de balcón
Otros tipos de montaje vertical	SBM / SCM RBM / RCM

Producto mostrar



Side Mounted Glass Spigot

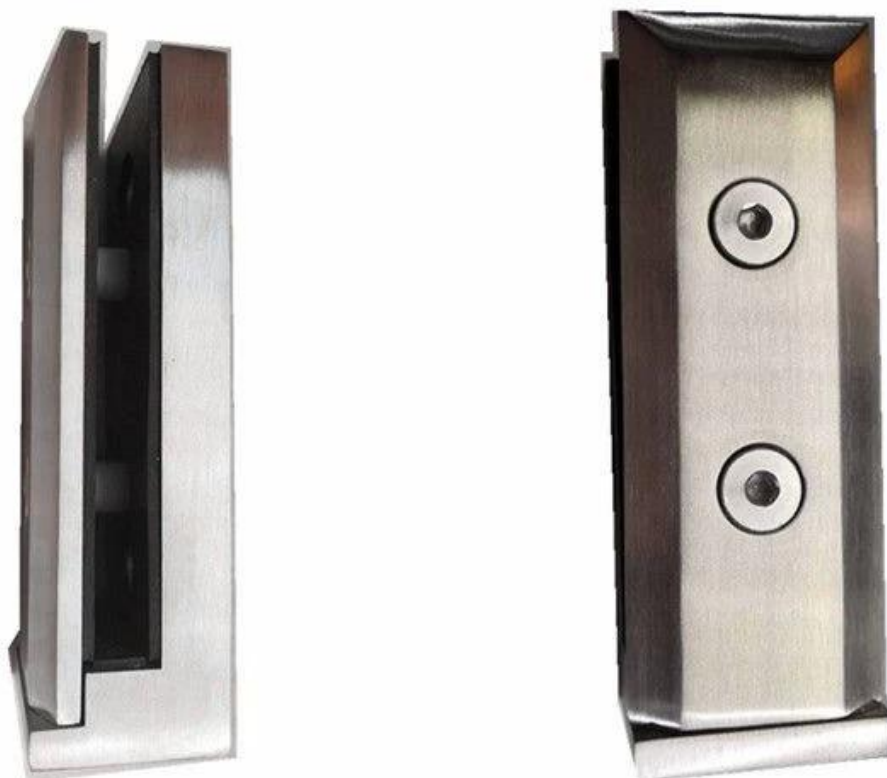




Explotóvista



MasaProducción



TécnicoDibujo

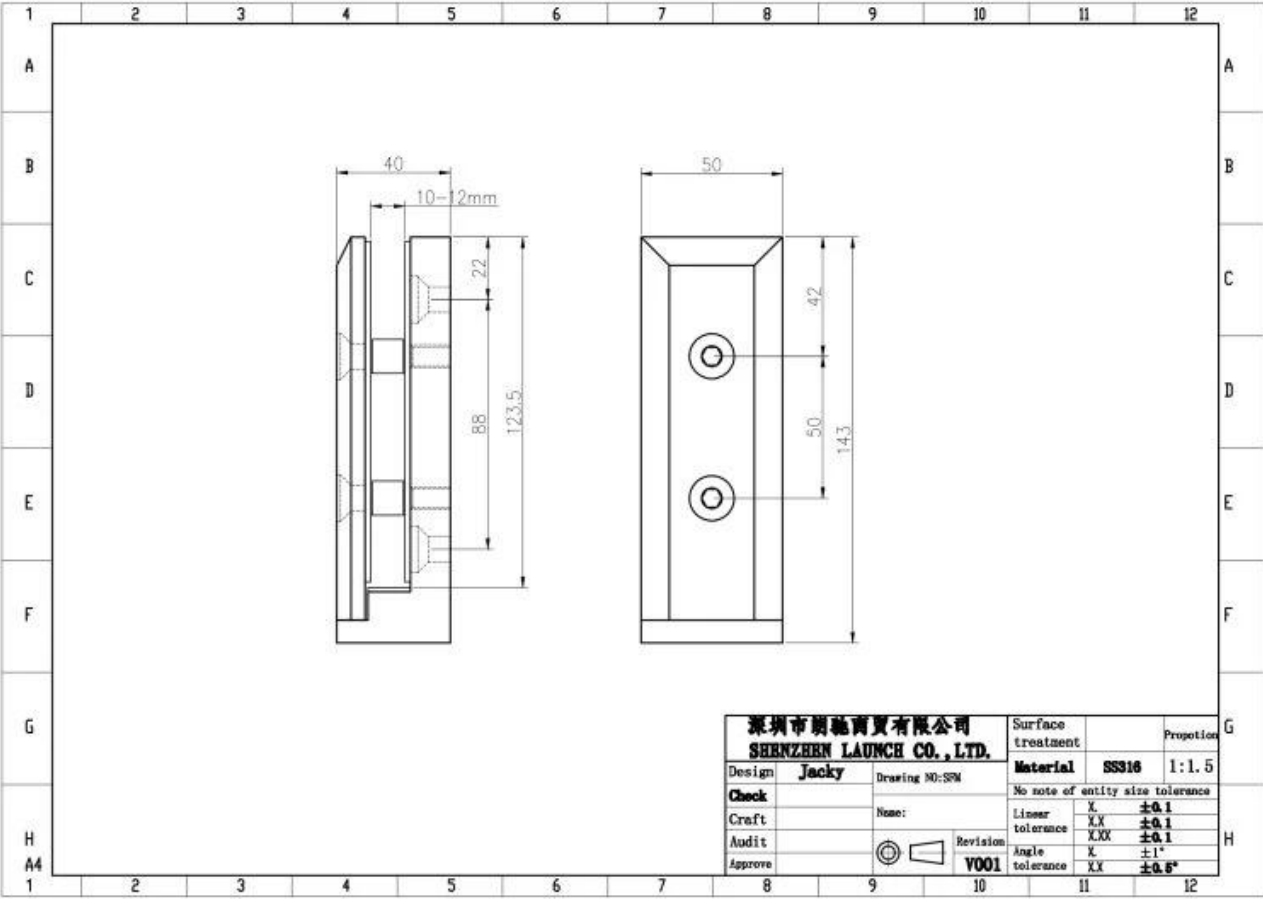

CómoAarmar



With the front face plate removed, level or align the Clamps to your design plan, taking into account the spacing recommendations and weight limitations shown on the back of this page. Be sure to secure the Clamps to an engineered and approved substrate with appropriate fasteners. You can fabricate the glass ahead of time, however, we recommend calculating hole locations after the Clamps are installed to account for any clamp movement.



Check the layout of the Clamps for alignment, then do a layout for fabricating holes in the glass to meet the installed measurements and spacing between glass panels.



Place the gaskets against the base fitting, both back and bottom lip, then set the glass panel on the base fitting. Next place the front gasket against the glass panel along with the front plate and secure to the base fitting by tightening the two screws. Don't tighten all the way, leave enough play to adjust the glass panel.



After you have achieved the proper alignment tightly secure the front plate screws to finish the installation. Clean the glass and view from a distance to determine if everything matches up and looks good. Adjust if necessary.

ProyectoFoto







Otro tipos vertical montado vidrio espiga

Acabado de superficie de espejo



Acabado superficial satinado



Acabado superficial negro mate



No dude en ponerse en contacto cuando tenga una consulta sobre ellos.

A la atención de: Frank Fang

Teléfono: +8615906261741

Correo electrónico: sales02@launch-china.cn