


los más popular Serie de bisagras hidráulicas para puertas de vidrio de acero inoxidable con cierre automático aplicado para puertas de ducha de vidrio. No solo es de alta calidad (resistente al óxido), sino que también lo mantiene silencioso mientras cierra la puerta.

Características de la bisagra hidráulica para puerta de vidrio -

- Tipo: vidrio de 90 grados a la pared
- Max. ancho de la puerta -1 000 mm
- Max. peso de la puerta: 60 kg
- Acero inoxidable 304 o 316
- satinado / espejo / acabado negro
- se detiene a 90 grados, se cierra automáticamente y velocidad ajustable

KEBIL 科比奥®

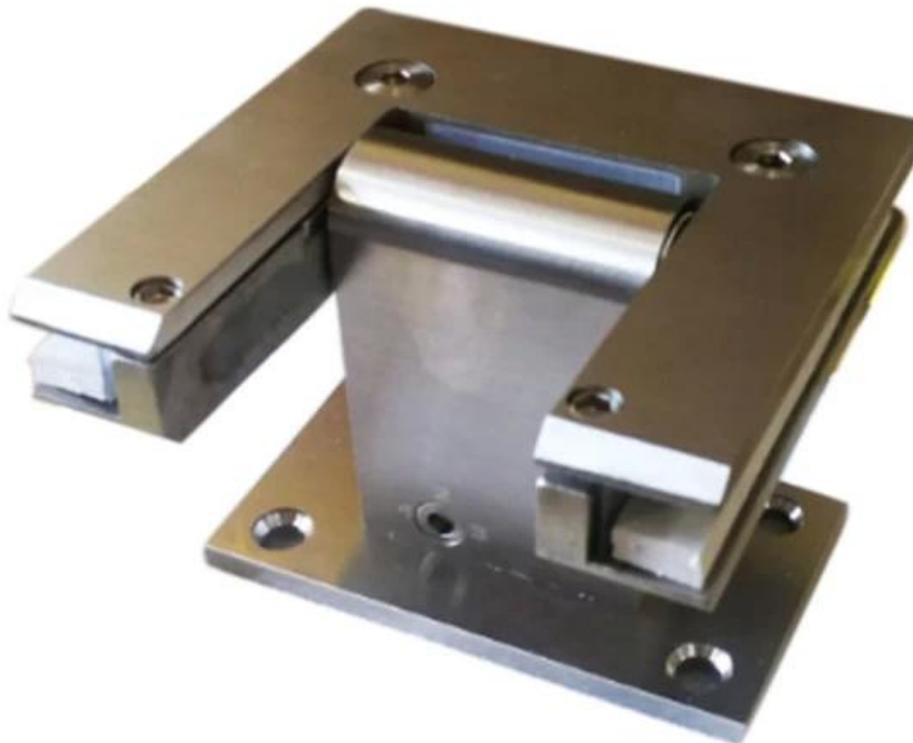



Bisagra de puerta de vidrio de 90 grados y 180 grados con material de acero inoxidable -




Bisagra de puerta de vidrio de 90 grados (material de acero inoxidable y material de aluminio) -



¿Cómo instalar la bisagra de la puerta de vidrio?

HINGE PARTS

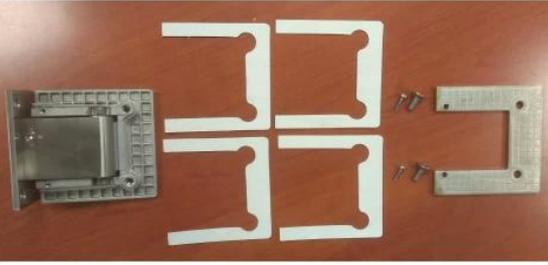

STEP 1 - LINE UP THE MAIN BODY OF THE HINGE ALONG THE DESIGNATED SLOT OF THE ACRYLIC DOOR



NOTE: REFER TO THE PICTURE BELOW AFTER THE DOOR IS INSTALLED.

THE ADJUSTMENT TO THE CLOSING SPEED WILL ALREADY BE SET, NO NEED TO ADJUST

MAIN BODY CONFIGURATION



TOP HALF CONFIGURATION



STEP 2 - SANDWICH THE ACRYLIC WITH THE TOP HALF OF THE HINGE, ALIGNING WITH THE MAIN BODY



MAKE SURE THE SCREW HEADS FACE INSIDE THE ROOM WHEN ATTACHING THE DOOR.

STEP 3 - INSERT THE BOLTS AND TIGHTEN WITH A 4mm HEX KEY



Fotos de empaquetado de la bisagra de la puerta de vidrio



