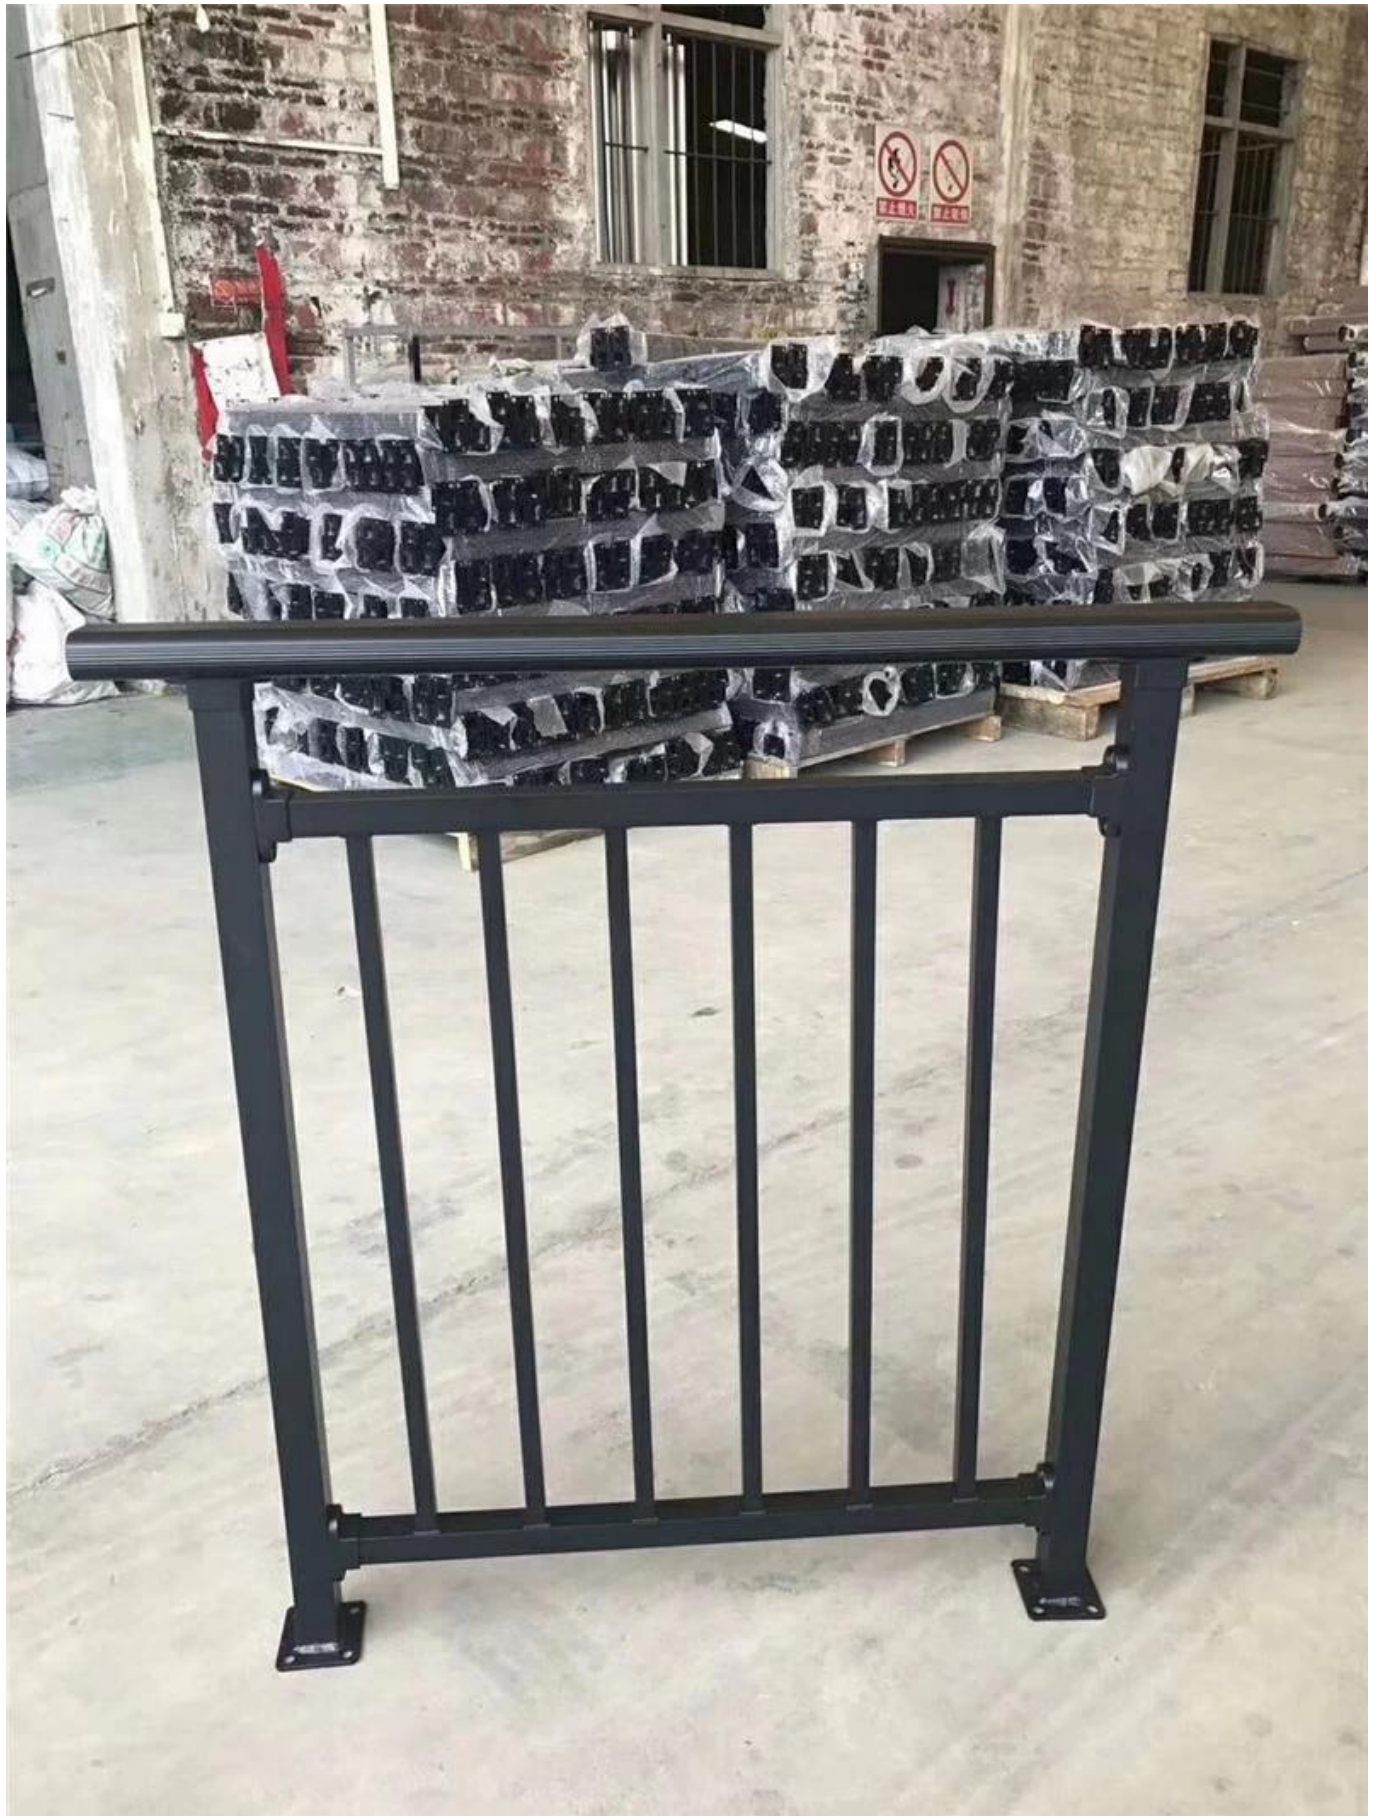


Shenzhen Launch valmistaa helposti asennettavan ulkopinnoitetun sinkkiteräsputkijärjestelmän. Tarjoamme asiakkaillemme täydelliset liitososat asennuksen helpottamiseksi.

Ulkopuolisen sinkkiteräksen suojakiskojärjestelmän ominaisuudet-

| | |
|-------------------|--|
| Materiaali | Sinkitty teräs tai alumiini |
| Suurittaa loppuun | musta jauhemaali |
| Koko | Yläkaide 80 * 40mm; 40 * 40 mm pylväs, 12 * 12 mm pystykiskot, 32 * 32 mm keskikisko |
| Kokoaminen | helppo DIY |
| MOQ | 1 metri |

Ulkopuolinen sinkkiteräsputkijärjestelmä, näytesarja -










Ulkopuolisen sinkkiteräksisen suojakiskojärjestelmän asennusohjeet-


Guard Rail Assembly Instructions


Tools Required: Electrical Power Drill
(Impact Drill Preferred)


Overview: Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.


- 
- 


1 Roughly position the 2 posts.
 - 


2 Put the post base caps on without securing them.
 - 


3 Secure top rail & post with brackets - 4 screws each.
 - 


4 Add the ends to the top rail.
 - 

5 Secure inside rail with brackets - 2 screws each.¹
 - 

6 Position whole rail. Mark the 4 holes on each post.
 - 

7 Remove hand rail, drill holes straight down, and hammer in bolts.²
 - 

8 Put hand rail over bolts, tighten nuts onto bolts.
 - 

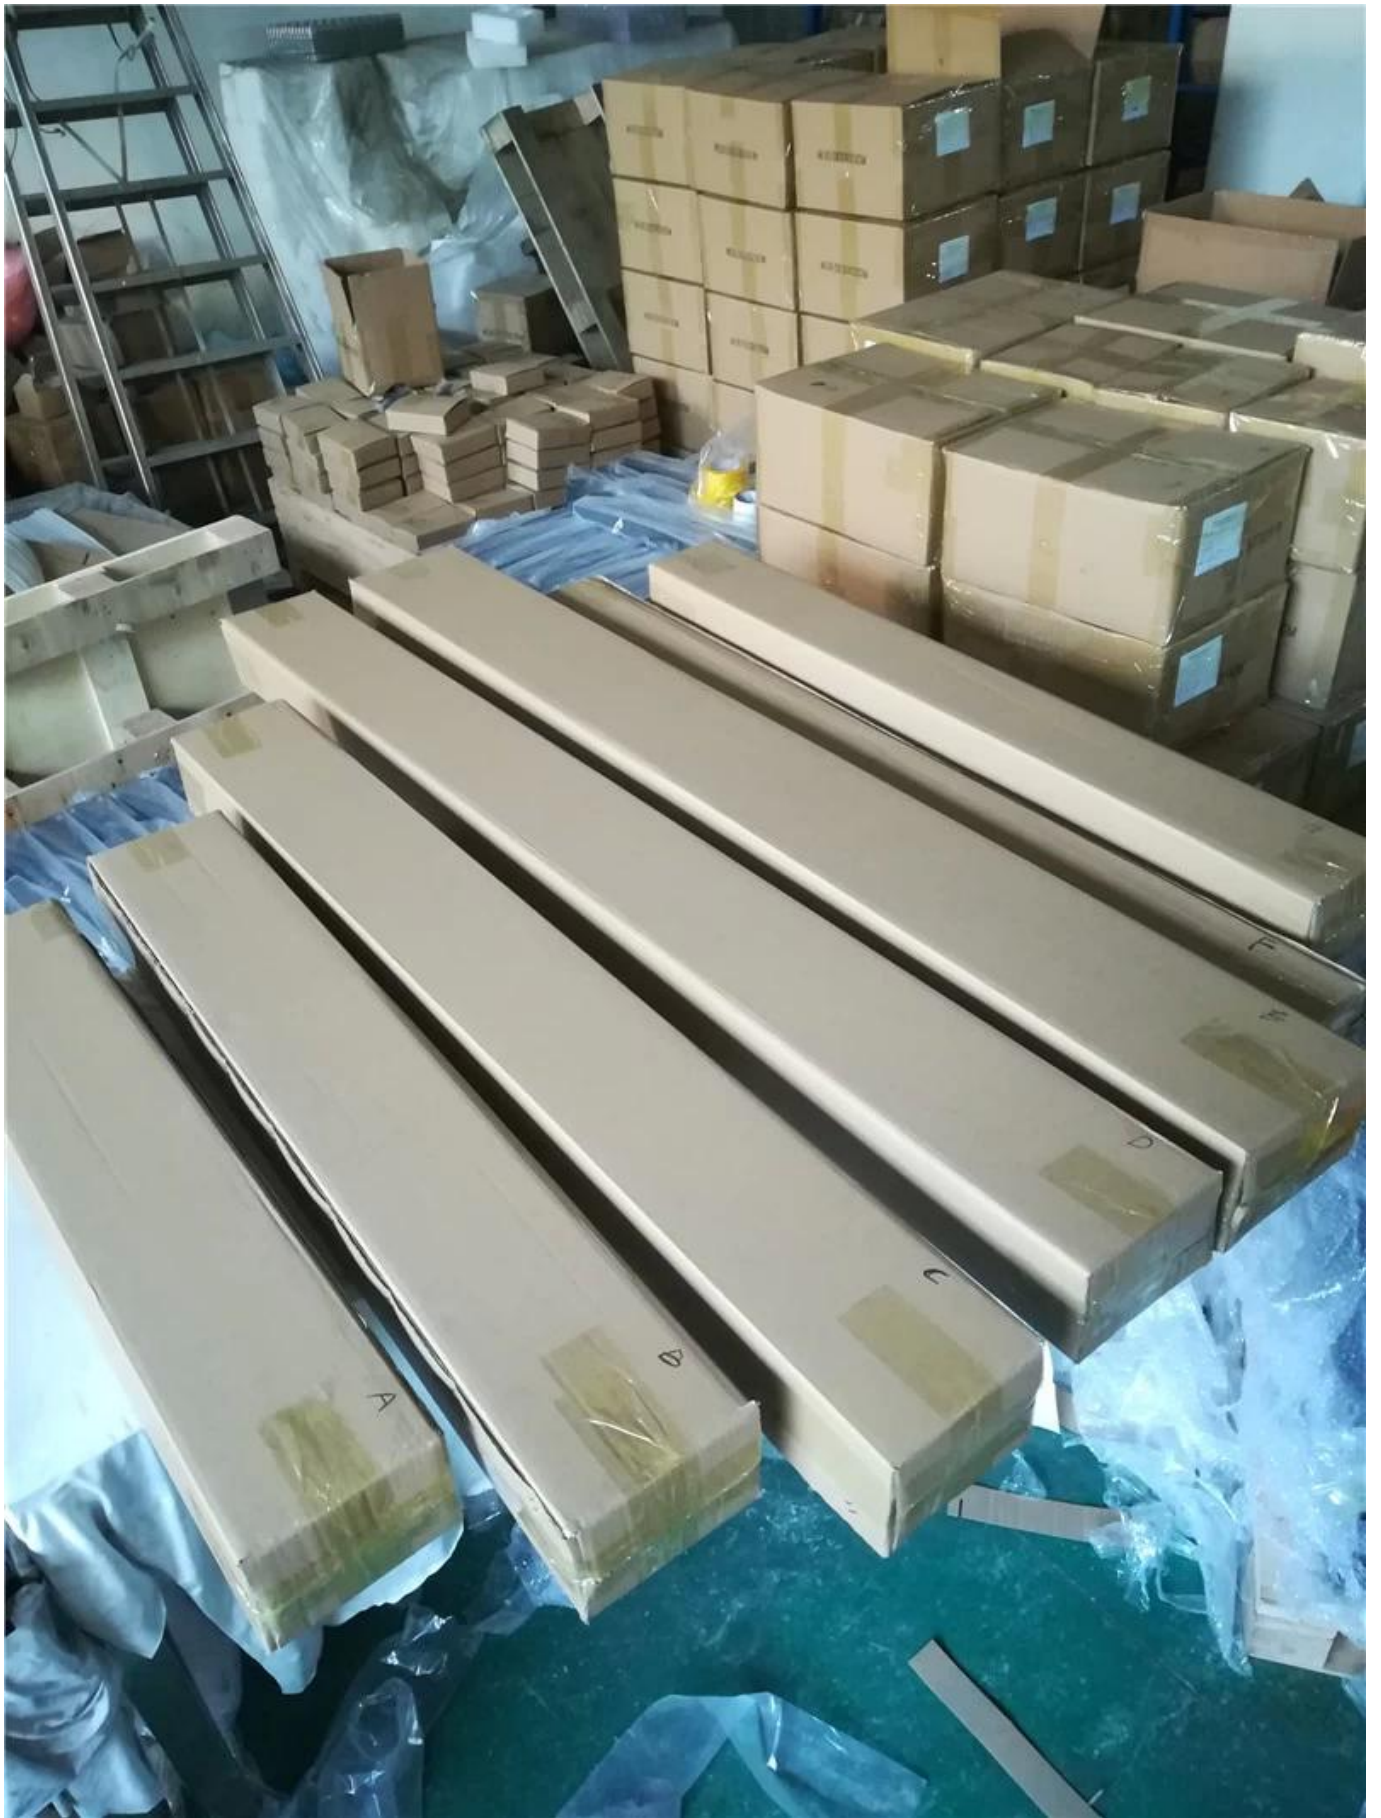
9 Insert the vertical railings.
 - 

10 Secure all of the inner rail.³
- ¹ Inside rail will be loose until each post is secured to the ground.
- ² Double check posts are parallel and tight against inside rail before marking holes for drilling.
- ³ Push and pull top rail & inside rail to ensure all is secure.

Tuotantovalokuvat sinkkiteräksestä valmistetusta ulkokiskojärjestelmästä-

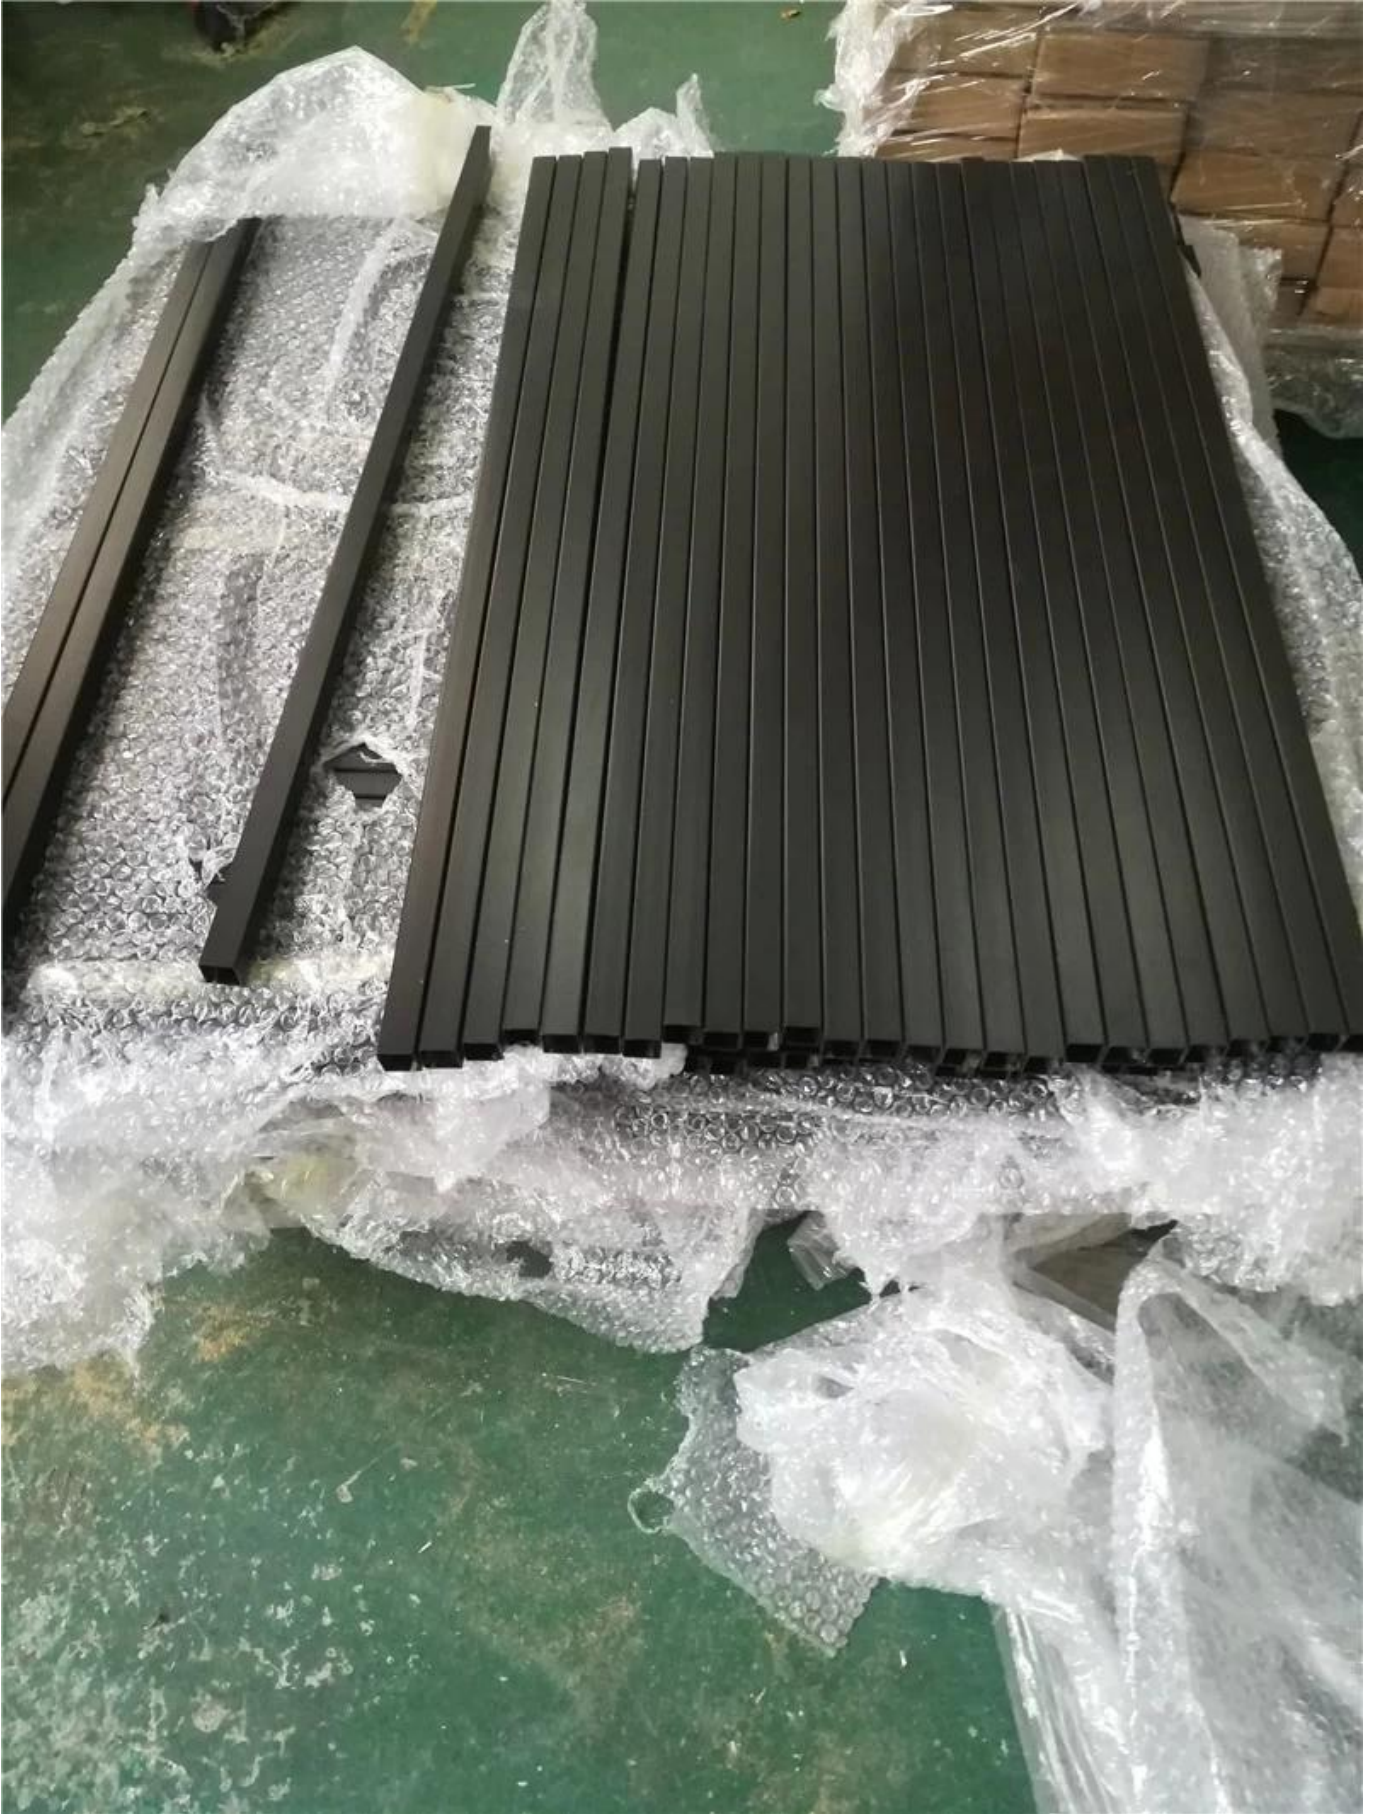




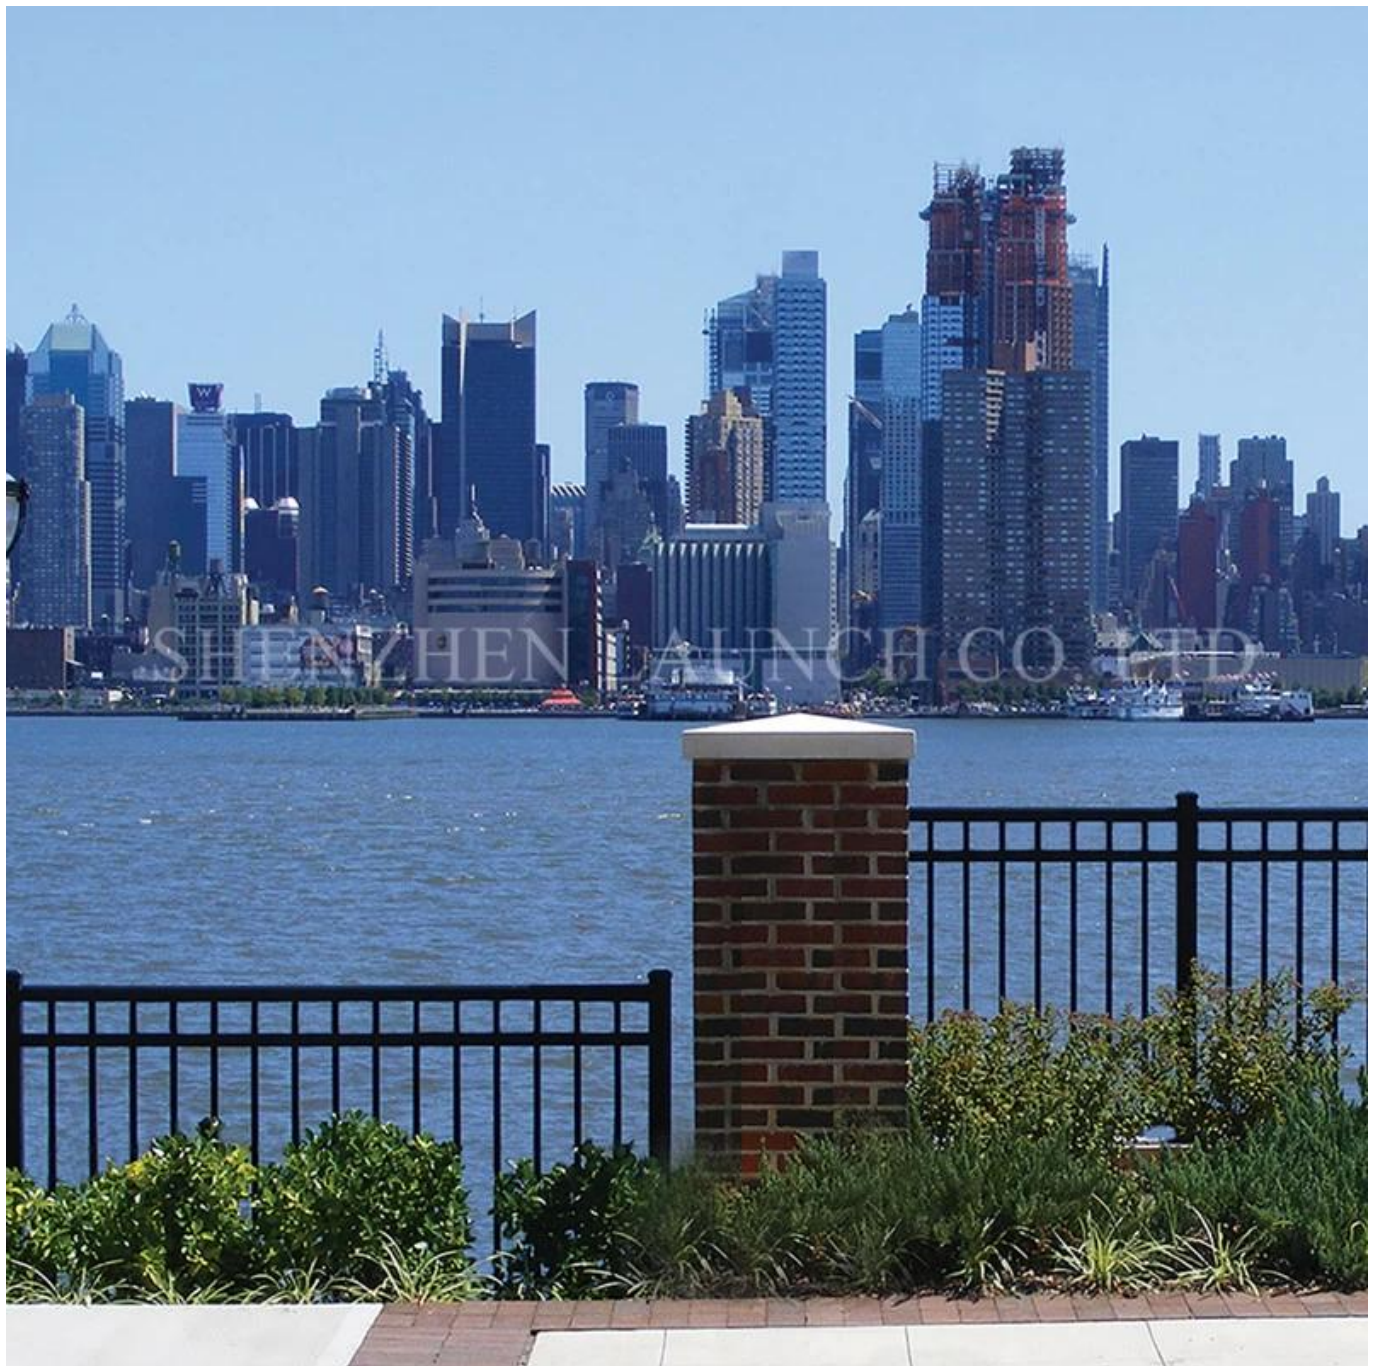








Guard Rail -galleriat -





www.chinabalustrade.com

