

Neliönmuotoinen säädettävä Duplex 2205 ruostumattomasta teräksestä valmistettu lasitappi

Tuotenro SBM

Materiaali duplex 2205

Viimeistelypeili, harjattu, pulverimaalattu (musta, valkoinen tai RAL-värit tarpeen mukaan)

Korkeus 168 mm


Säädettävä tasoituslevy, kupumainen pohjakansi

Pohjalevy soikealla rei'illä, helpompi pulttikiinnitys

Mitat varten Neliönmuotoinen säädettävä Duplex 2205 ruostumattomasta teräksestä valmistettu lasitappi



DRAWING FOR SBM

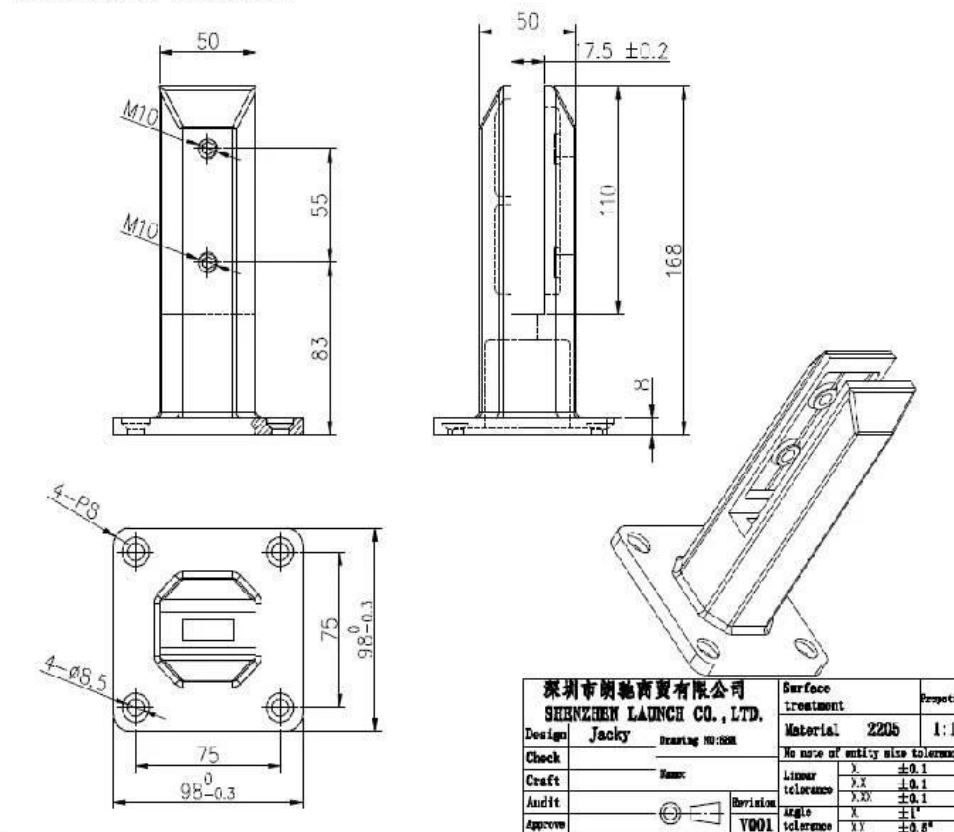


Asennus varten Neliönmuotoinen säädettävä Duplex 2205 ruostumattomasta teräksestä valmistettu lasitappi



fixing method: base plate spigots

Mark out the centre line of proposed glass fence with a chalk line. Determine clamp location based on a sheet size (recommendation on pages 1 & 2). Use base plate as a template to mark out the hole positions and drill holes to suit.


Note: Do not exceed 100mm gaps between glass panels. Optimum gap is 40mm to 60mm

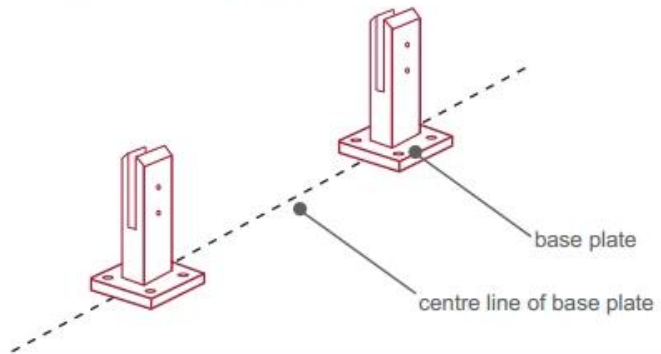

Now the base plated spigots can be fitted to the floor and plumbed via shims (not supplied) under the base plates. Be sure to tighten firmly as the smallest of movement at the base plate will result in noticeable movement at the bottom of the glass fence.


Tip: By setting the two outer spigots of your total span, a string line can be run in the 'throat' of the spigots, giving correct height for all spigots in between

Note: Do not exceed 100mm gap from the fixing surface to the bottom of the glass

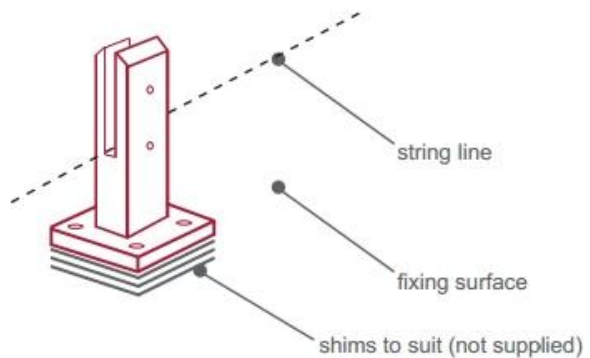

When all spigots are installed, slip domical cover the top of the spigot to hide fixings. It will be necessary to turn the adjustment screws on the spigot face all the way in to allow cover to pass over


Note: Same installation method applies to round base plate spigot



The glass is then installed to the spigots. Place plastic packers between glass & spigot, at no stage should glass touch the metal

How adjustability works:

1. Place glass in spigot
2. Fix/ tension glass both sides with allen key

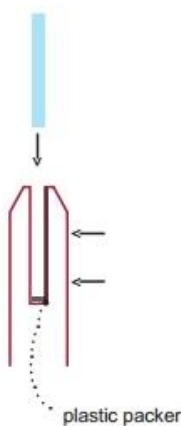



Mattamusta viimeistely Neliönmuotoinen säädettävä Duplex 2205 ruostumattomasta teräksestä valmistettu lasitappi

