

Tuotteen nimi	Käsikiskot ulkoportaille, mustan soikea ulkokäyttöinen käsikaite kuistille, kannelle tai sisäportaille, kaitepakkaus
Materiaali	Galvanoitu teräs
Väri	Musta
Kapasiteetti	5000 kpl kuukaudessa
Ominaispiirteet	Vahva, tyylikäs, kestävä, korroosiokestävä
Muoto	Neliöpostia 40*40mm, neliömetriä 50*25 mm
Soveltaminen	Puutarha, uima -allas, kansi, terassi, parveke, portaikko jne.
Maksu	T/T, Western Union, Alibaba, Paypal, L/C, jne.
Materiaalitestausraportti	Käytettävissä oleva







EASY TO INSTALL

All necessary accessories are provided



Step 1: Assemble



Step 2: Mark



Step 3: Punch



Step 4: .Finish



WROUGHT IRON RAILING

Safety & Durable Outdoor Handrails

Durability: The handrail withstand years of use and exposure to the elements. The product won't rust, rot, or degrade quickly.

Safety: Sturdy handrail. Its reliability is crucial. No any risk of it coming loose over time.

Installation: Comes with all mounting hardware and clear instructions. You can do it yourself, just take 15 mins.



Everything You Need Are Included

a masonry drill bit

an extension drill bit

a hex nutsetter

a double ended wrench

an allen wrench

8 x extension bolts


8 x lag screws

8 x screws

8 x self-tapping screws

Modern & Versatile Cable Stair Railing

Suitable for Wood and Concrete Surfaces

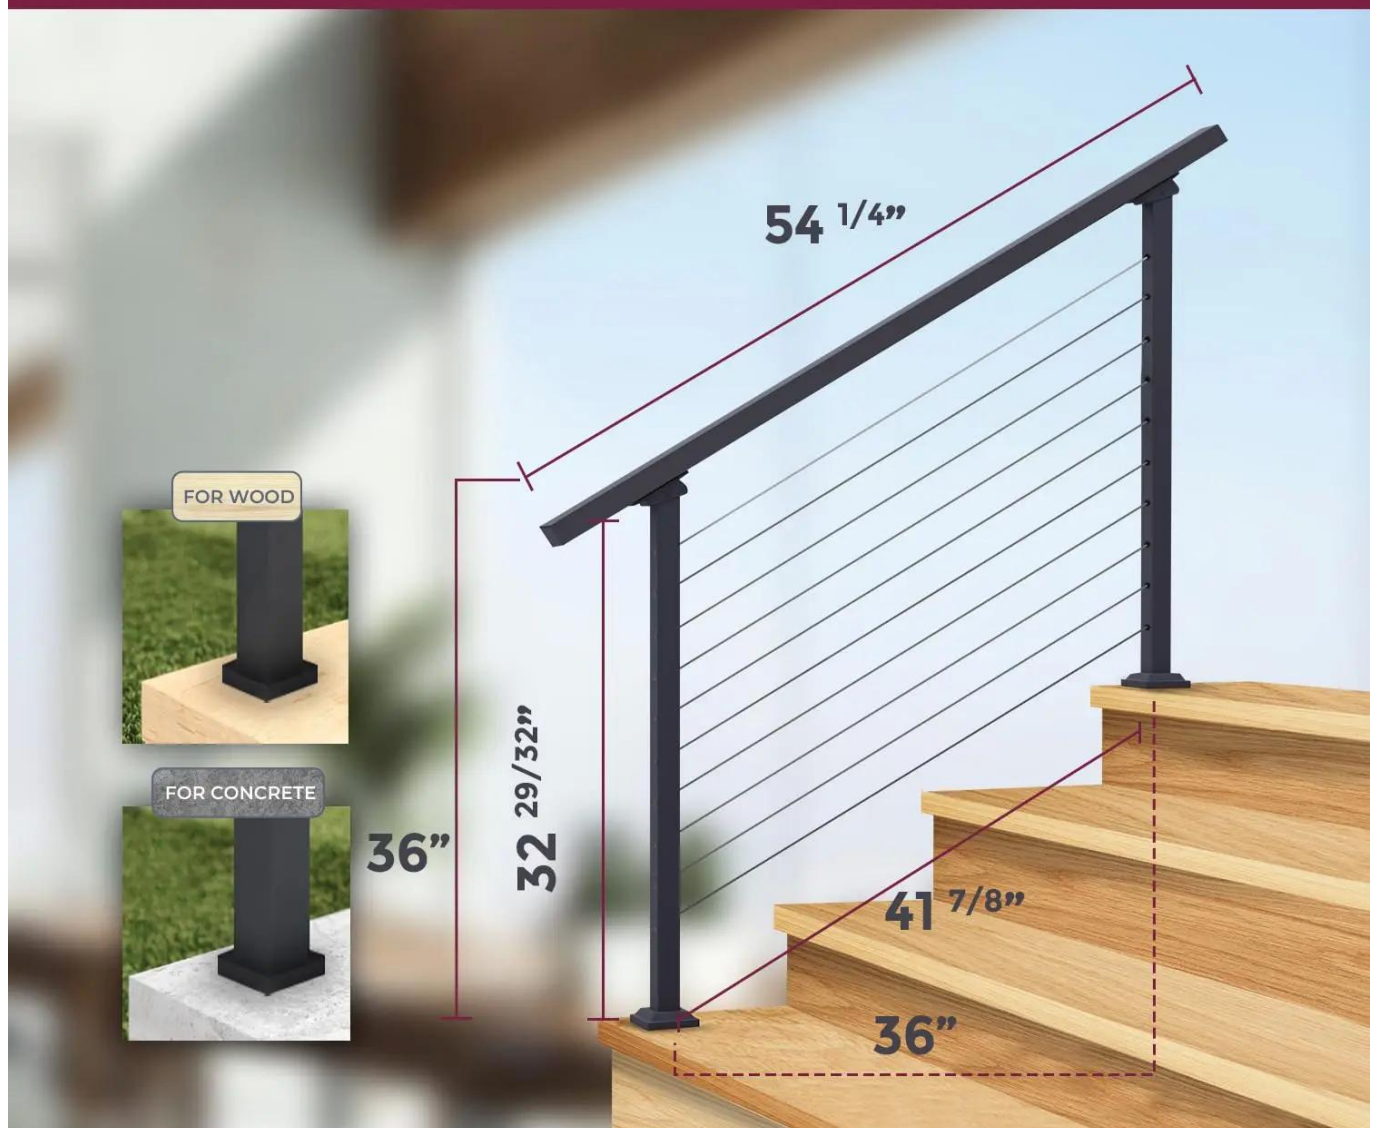



34 1/2"

Baseplate
3.15" X 2"

Kits Included



8 Self-Drilling Screws



1 Bubble level



8 Lag Crew (for wood)



**1 Hex Nut/
Bolt Drive**



8 Concrete Wedge Anchors (for concrete)



10 Flat Washers



1 Hex Bit



1 Masonry Drill Bit



1 Wood Pilot Hole Drill Bit



1 Drill Bit Extender



1 Depth Measuring Pencil



1 Ruler



2 Top Bracket



**40 Cable Hole
Protector Sleeve**




2 Post Cover

Sturdy and Space Saver Cable Railing System




STAIRS POST

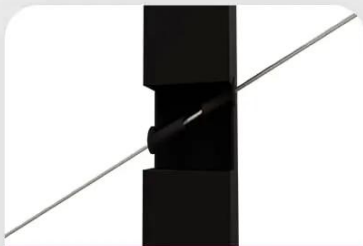


30 degrees angle

CORNER POST

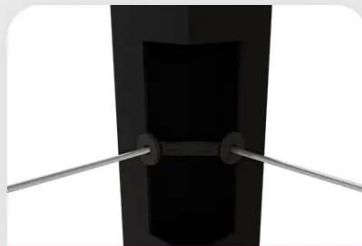

L-shaped hole


LINE POST

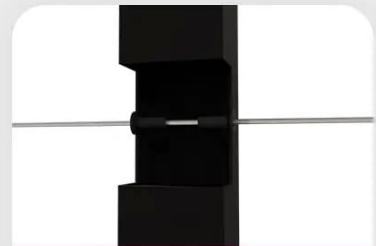

Straight hole

Buidling Code Compliant

For Residential and Commercial Buildings

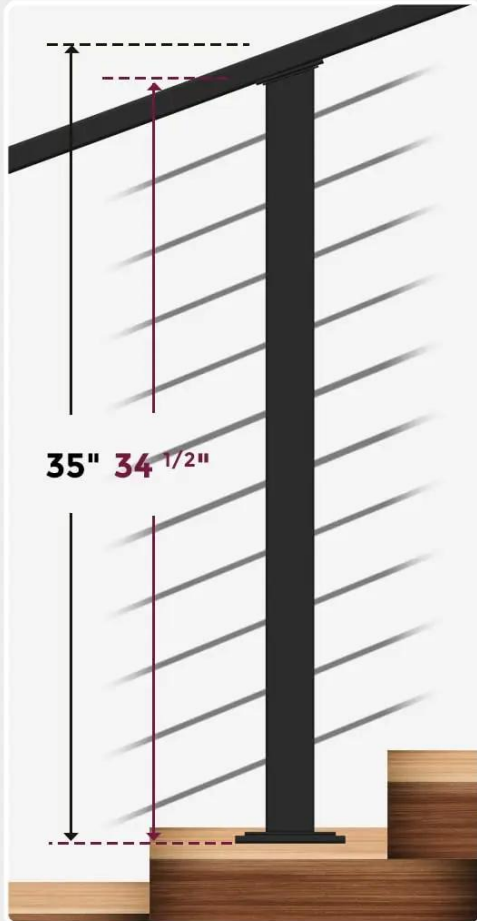

-  Rust Resistant
-  Weather Resistant
-  Corrosion Resistant
-  Waterproof Construction
-  Less Discoloration, Chalking, or Flaking

IBC 1014.2: Handrail height, measured above stair tread nosing's, or finish surface of ramp slope, shall be uniform, not less than 34" and not more than 38"

