

Shenzhen Launch valmistaa hydraulityyppisiä pehmeästi sulkeutuvia suihkuluukun lasisaranoita ruostumattomasta teräksestä 304/316.

Malli	B90
Materiaali	ruostumaton teräs 304/316
Suorittaa loppuun	satiini, peili, musta
Maks. oven korkeus	2100mm
Maks. oven leveys	1000mm
Maks. oven paino saranaparia kohti	45 kiloa
Sovellus	suihku lasiovet, lasiaidan portit
MOQ	1 pari = 2 kpl

Kuvia pehmeästi sulkeutuvista suihkuluukun lasisaranoista








Pehmeän sulkeutuvan suihkun oven lasisaranan asennusohjeet -

B-90 B-180 Hydraulic Buffer Glass Door Hinges' Specification

Application range & glass door parameters :

1. This series of hydraulic glass hinge is suitable for tempered glass door without frame .
2. Suitable for MAX door height $\leq 2100\text{mm}$
3. Suitable for MAX door width $\leq 1000\text{mm}$
4. Glass door thickness : 8-12mm
5. Maximum bearing weight of 45KG/2PCS

Glass door open cut reference graph (figure 1B -90 figure 2B - 180)

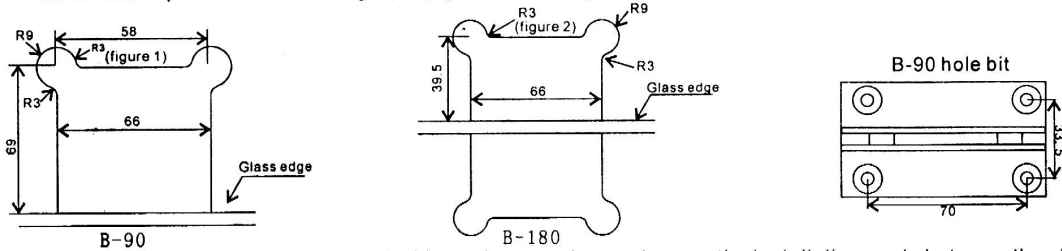


After the glass cut , it must be treated with steel processing ,make sure the installation angle between the glass door and the ground is 90°when you install it .

The hydraulic glass door hinge can be adjusted for closing strength for 1 .2 .3 degree

Note:the door must be completely closed before you need to adjust the closing strength .

The regulation method is as follows :

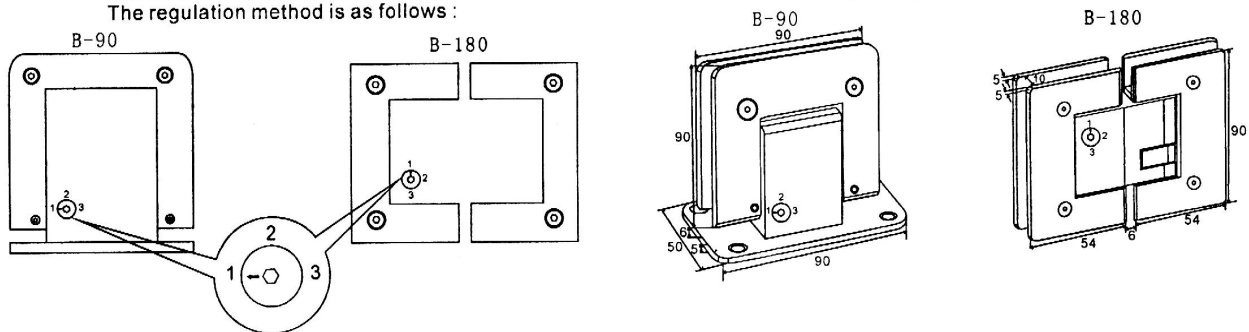

(Twist the arrow to the position of desire strength)

Pakkaustiedot -

1 kpl valkoiseen laatikkoon, 10 kpl laatikkoon-



Projektivalokuvat pehmeästi sulkeutuvista suihkun oven lasisaranoista -

