


Supports de montage en verre de clôture de balcon Duplex 2205 Matériel pour une utilisation en extérieur pour les courbières en verre d'épaisseur de 1/2 ".

1. Caractéristiques des supports de montage en verre de clôture de balcon -

Matériel	Duplex 2205
Finir	satin brossé
Hauteur	168mm
Épaisseur du verre	10-13.52mm verre d'épaisseur
Hauteur	168mm; ou peut être personnalisé
Joint en plastique	Fabriqu� en nylon, il peut durer du temps tout au long de la vie
Boulon en b�ton pour convenir	M8 * 100
Poids unitaire par pc	1,42 kg
En stock	Oui
Moq	2 pcs

2. Dimensions de Sbm Supports de montage en verre-

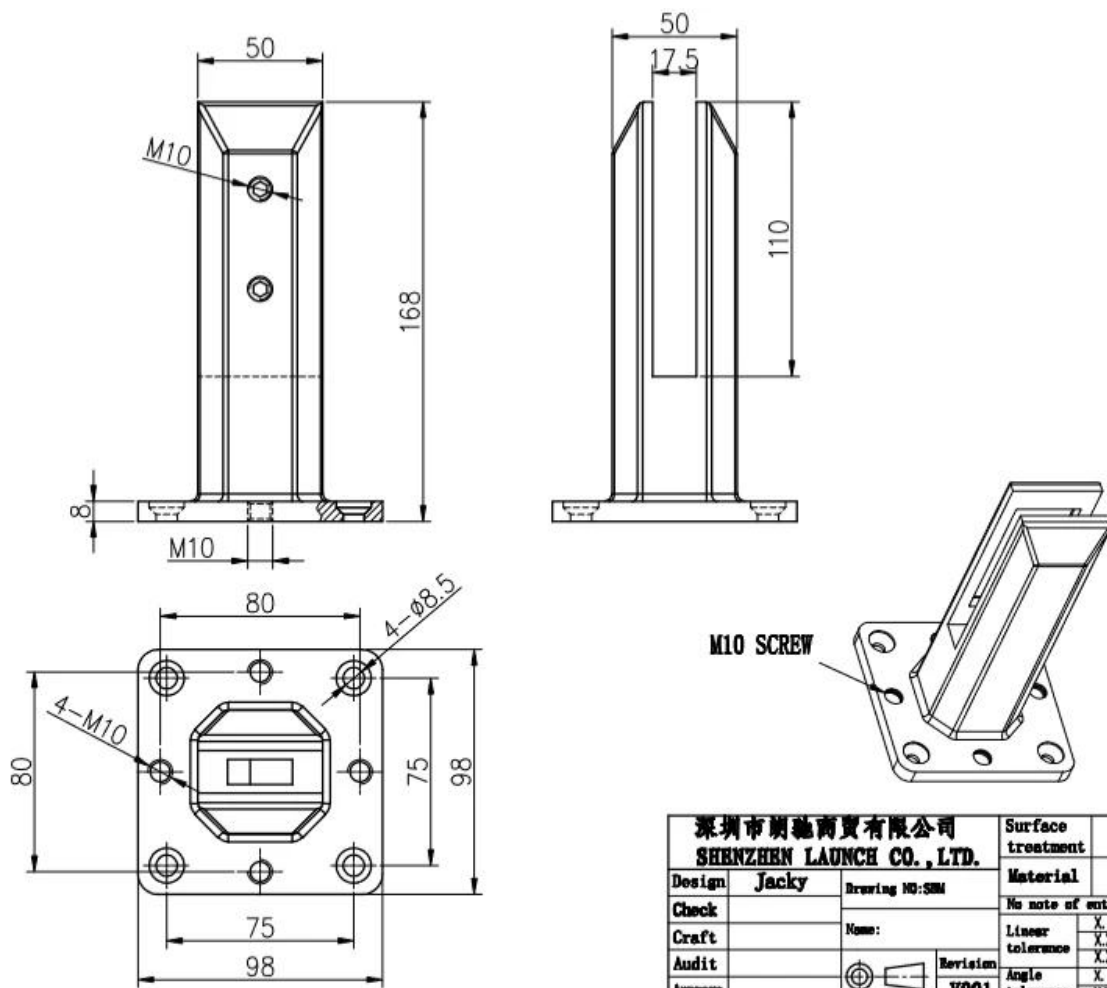

深圳市朗馳商貿有限公司 SHENZHEN LAUNCH CO., LTD.		Surface treatment	Preparation
Design	Jacky	Material	1:2
Check	Drawing NO: SSM	No note of entity size tolerance	
Craft	Name:	Linear tolerance	X ±0.1
Audit		tolerance	XX ±0.1
Approve	Revision	Angle tolerance	X ±1°
	V001		XX ±0.5°

3.Chargement test&Matériel test pour Sbm Supports de montage en verre-



LOADING TEST FOR SBM

Introduction

MTS Metallurgical Testing Services was engaged to witness the installation of a sample pool fence spigot and to subsequently conduct load tests on the spigot to the requirements of Australian Standard AS1926.1 - 2012.

Standard/Specification AS 1926.1 - 2012, Section 3.2 and Appendix B

Results Summary

(For details of individual tests, refer to the tables on the following pages.)

ID	Item/Heat No.	Dimensions/Type/Details	Finish	Overall Assessment
14117/01	SSRM316	60mm Square, Base Plate 316 Stainless steel	316l	COMPLIES

Remarks

After completion of the testing, the spigot was found to be in sound condition with no breakage, tearing or signs of fracture and no loosening of the fixings.

Colin Cousins
Metallurgical Testing Manager



Accreditation No: 15624
Accredited for compliance
with ISO/IEC 17025

Strength Test

Test Specification AS 1926.1 - 2012, Appendix B Test Procedure MTS-TP3.1 Compression Tests - Products

Specimen ID	Observations	Assessment
14117/01	Test Equipment: Hydraulic ram and 10,000 N load cell Test Load: 330N Load Duration: 45 Secs Deflection under load: 1 mm Permanent Deflection after removal of test load: 0 mm	COMPLIES

Requirements No permanent damage or loosening of fixings.



12/16/2020 5:54:18 PM

Method: Fe-30
 Comment: Cr-, Cr/Ni-steel
 Type Standard 18--8

12/16/2020 5:54:09 PM

Type corr.concentr.

Sample Name:

Sample ID:

	C	Si	Mn	P	S	Cr	Mo	Ni
	%	%	%	%	%	%	%	%
< x > (1)	0.0224	0.8873	1.1010	0.0263	0.0032	21.6796	3.0718	5.5691

	Al	Co	Cu	Nb	Ti	V	W	Pb
	%	%	%	%	%	%	%	%
< x > (1)	< 0.0005	0.0797	0.1603	< 0.0002	0.0044	0.0893	0.0305	< 0.0002


	Sn	Sb	B	N	Fe			
	%	%	%	%	%			
< x > (1)	0.0092	< 0.0004	0.0024	0.1024	67.1600			



fixing method: base plate spigots

Mark out the centre line of proposed glass fence with a chalk line. Determine clamp location based on a sheet size (recommendation on pages 1 & 2). Use base plate as a template to mark out the hole positions and drill holes to suit.


Note: Do not exceed 100mm gaps between glass panels. Optimum gap is 40mm to 60mm

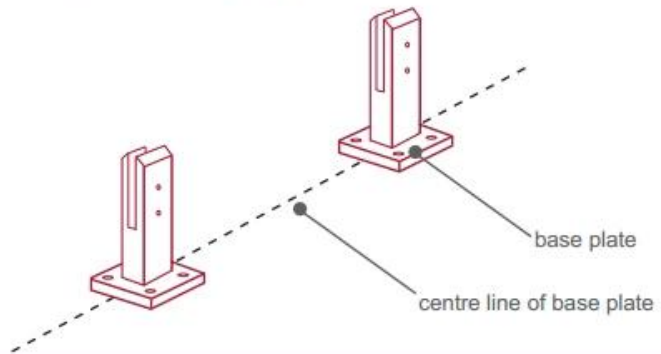

Now the base plated spigots can be fitted to the floor and plumbed via shims (not supplied) under the base plates. Be sure to tighten firmly as the smallest of movement at the base plate will result in noticeable movement at the bottom of the glass fence.


Tip: By setting the two outer spigots of your total span, a string line can be run in the 'throat' of the spigots, giving correct height for all spigots in between

Note: Do not exceed 100mm gap from the fixing surface to the bottom of the glass

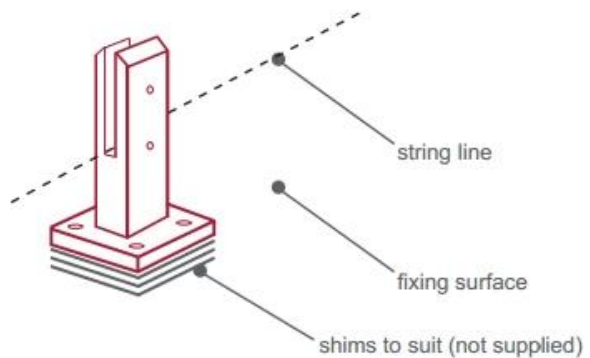

When all spigots are installed, slip domical cover the top of the spigot to hide fixings. It will be necessary to turn the adjustment screws on the spigot face all the way in to allow cover to pass over


Note: Same installation method applies to round base plate spigot



The glass is then installed to the spigots. Place plastic packers between glass & spigot, at no stage should glass touch the metal

How adjustability works:

1. Place glass in spigot
2. Fix/ tension glass both sides with allen key

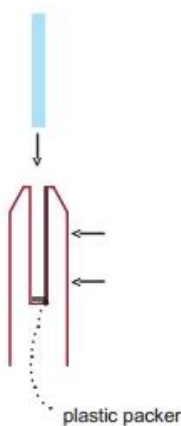



5 Emballages des détails pour Sbm Supports de montage en verre-

1 pc dans une boîte blanche; 12 pcs dans un carton-



6MasseProductionTraiterpourSbmSupports de montage en verre-

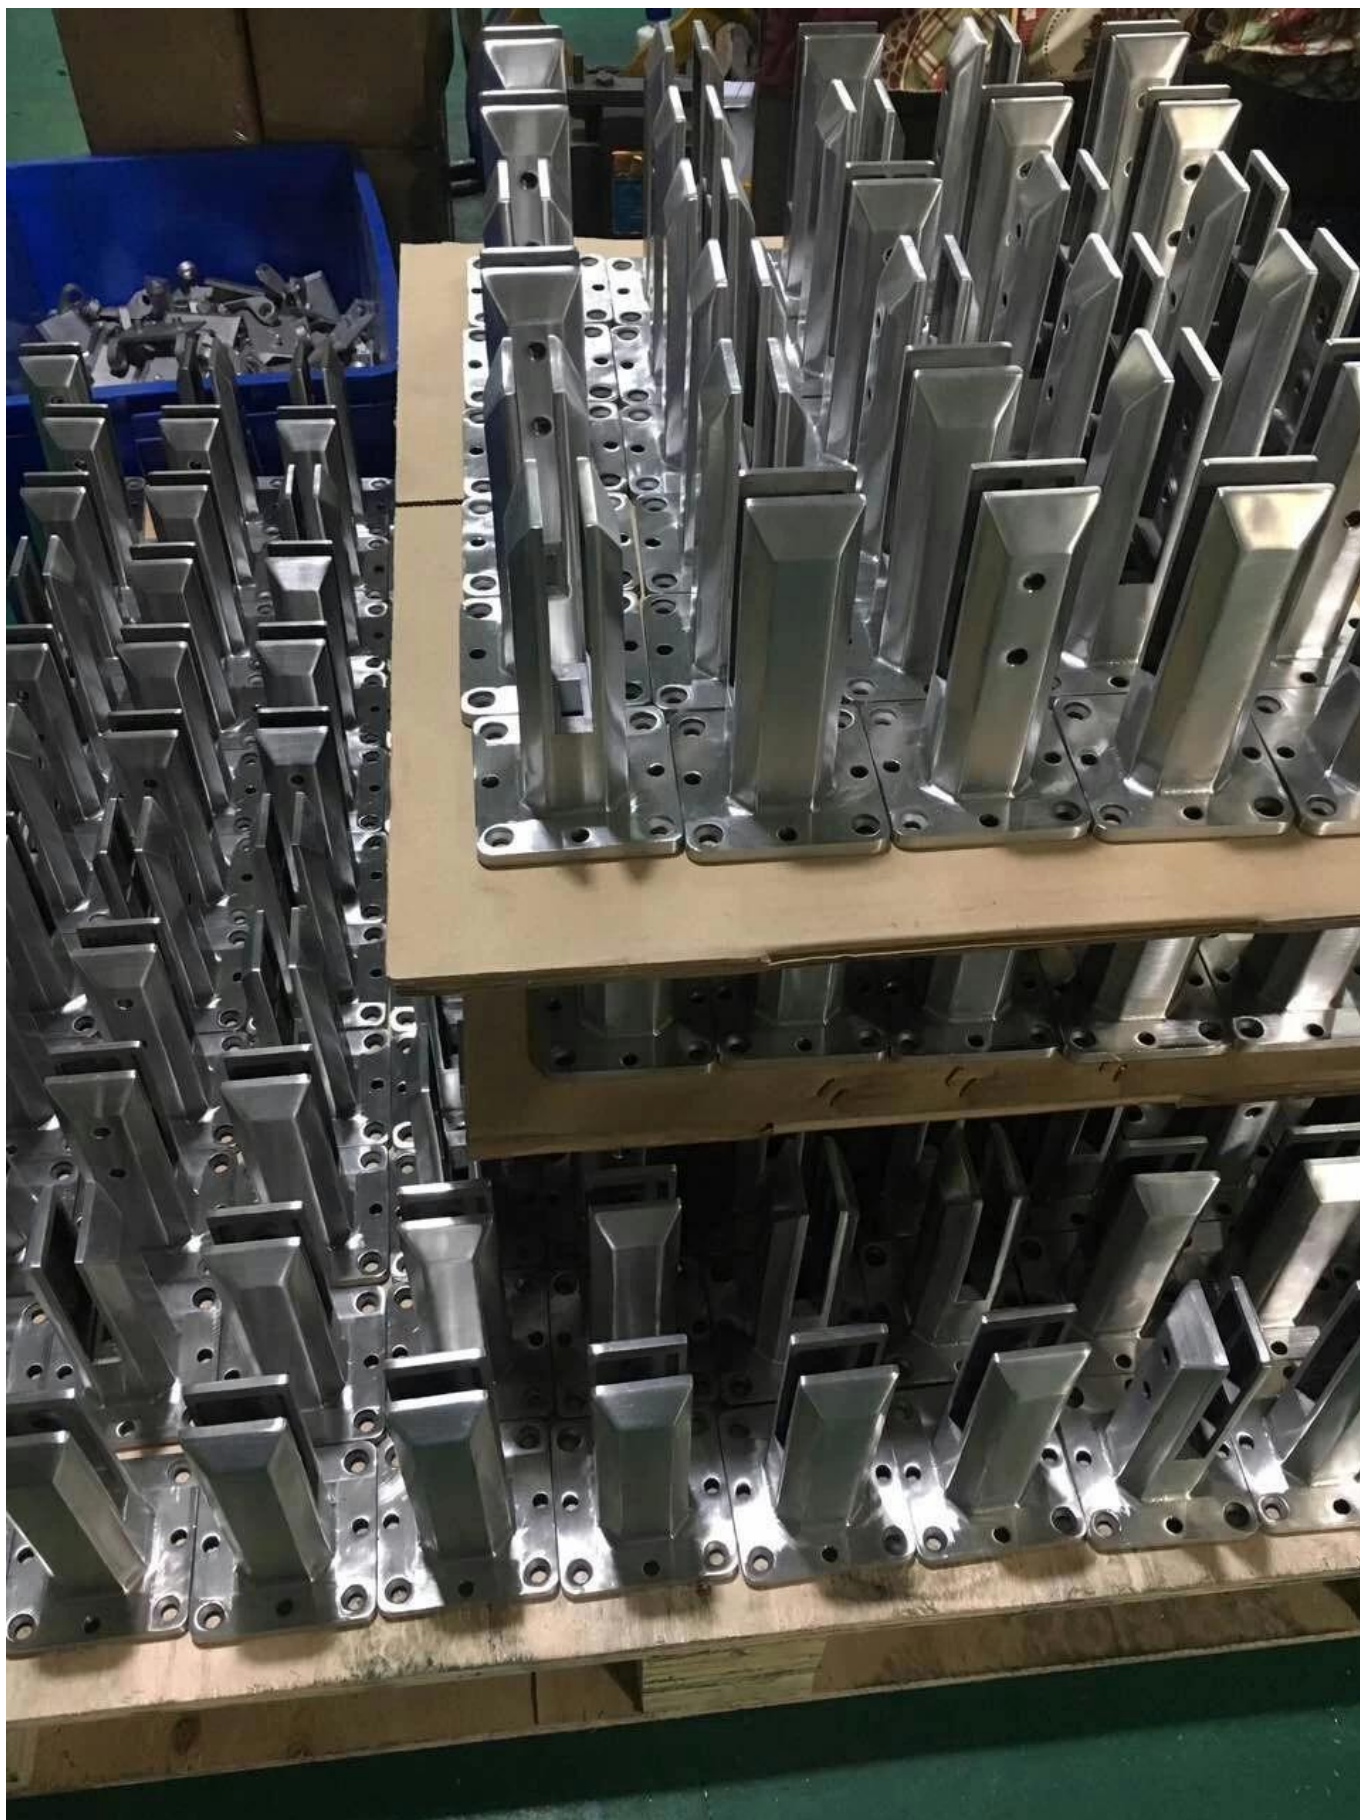

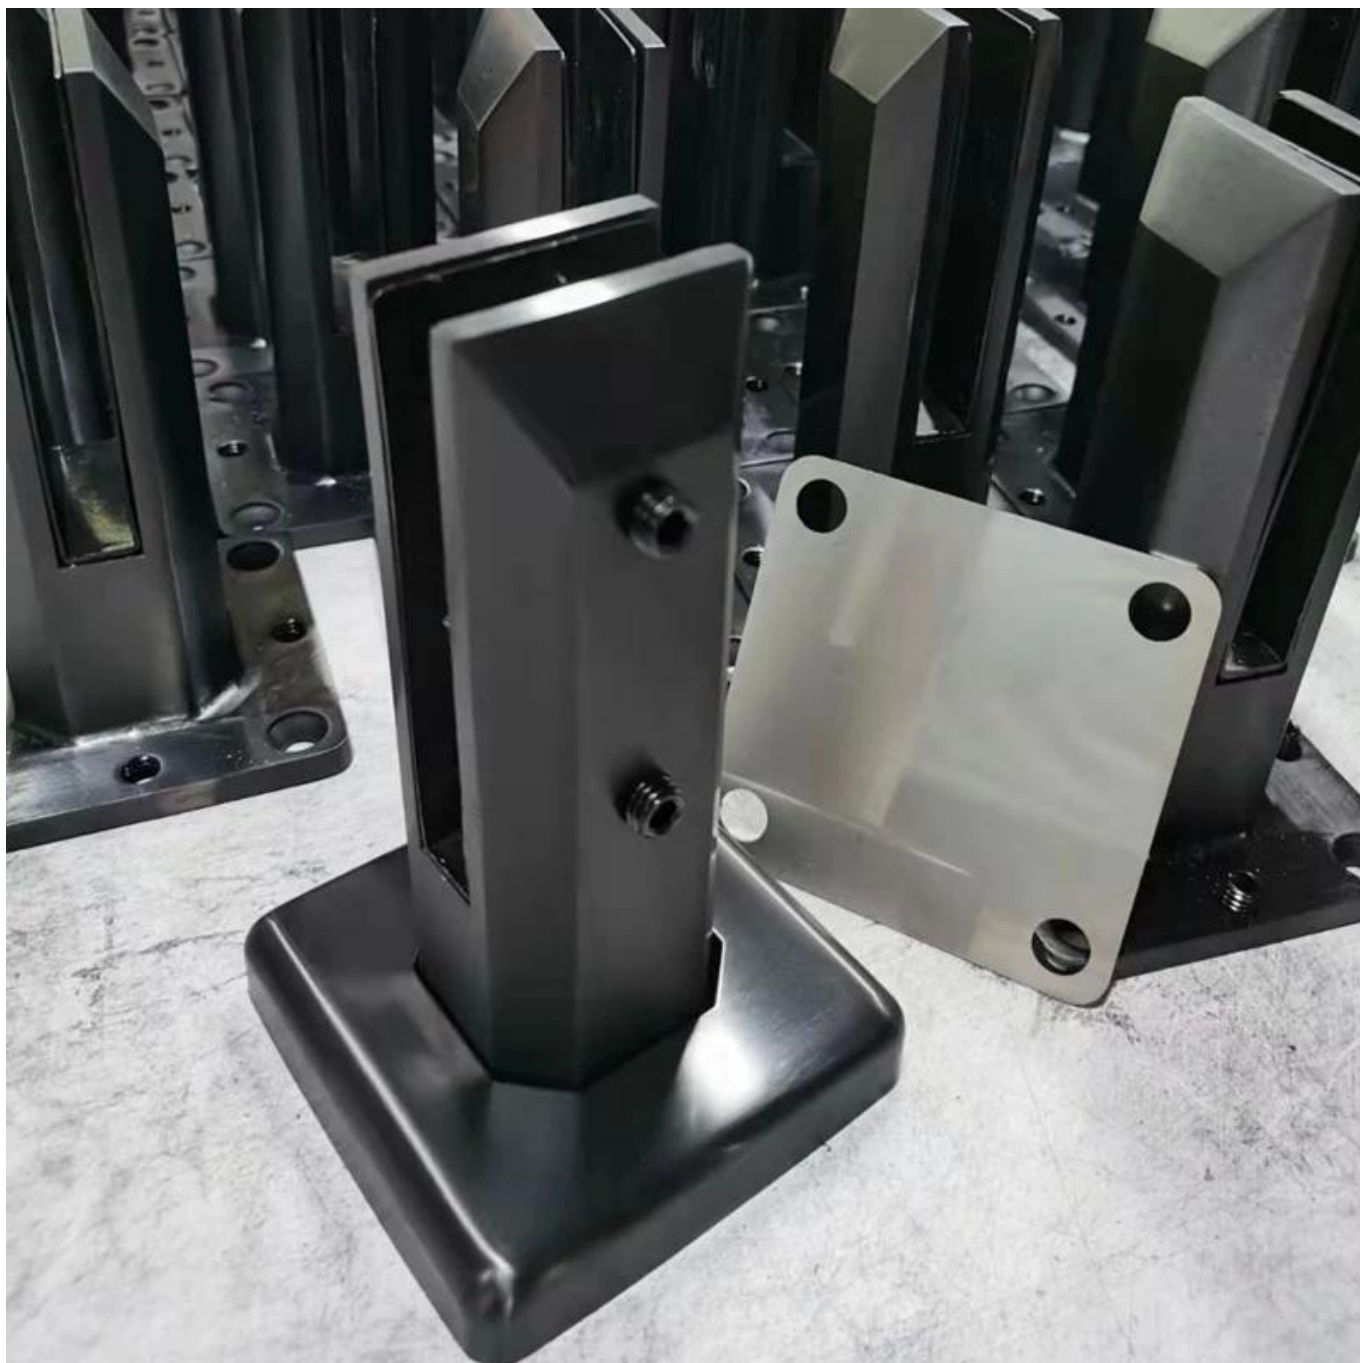

7.Suites des modèles de verrerobinet pour votre sélection-



Glass spigot



MODEL # SBM



MODEL # SCM



MODEL # RBM




MODEL # RCM

8ProjetPhotosdeSans cadreVerreBalustradeavecverrecrampons-







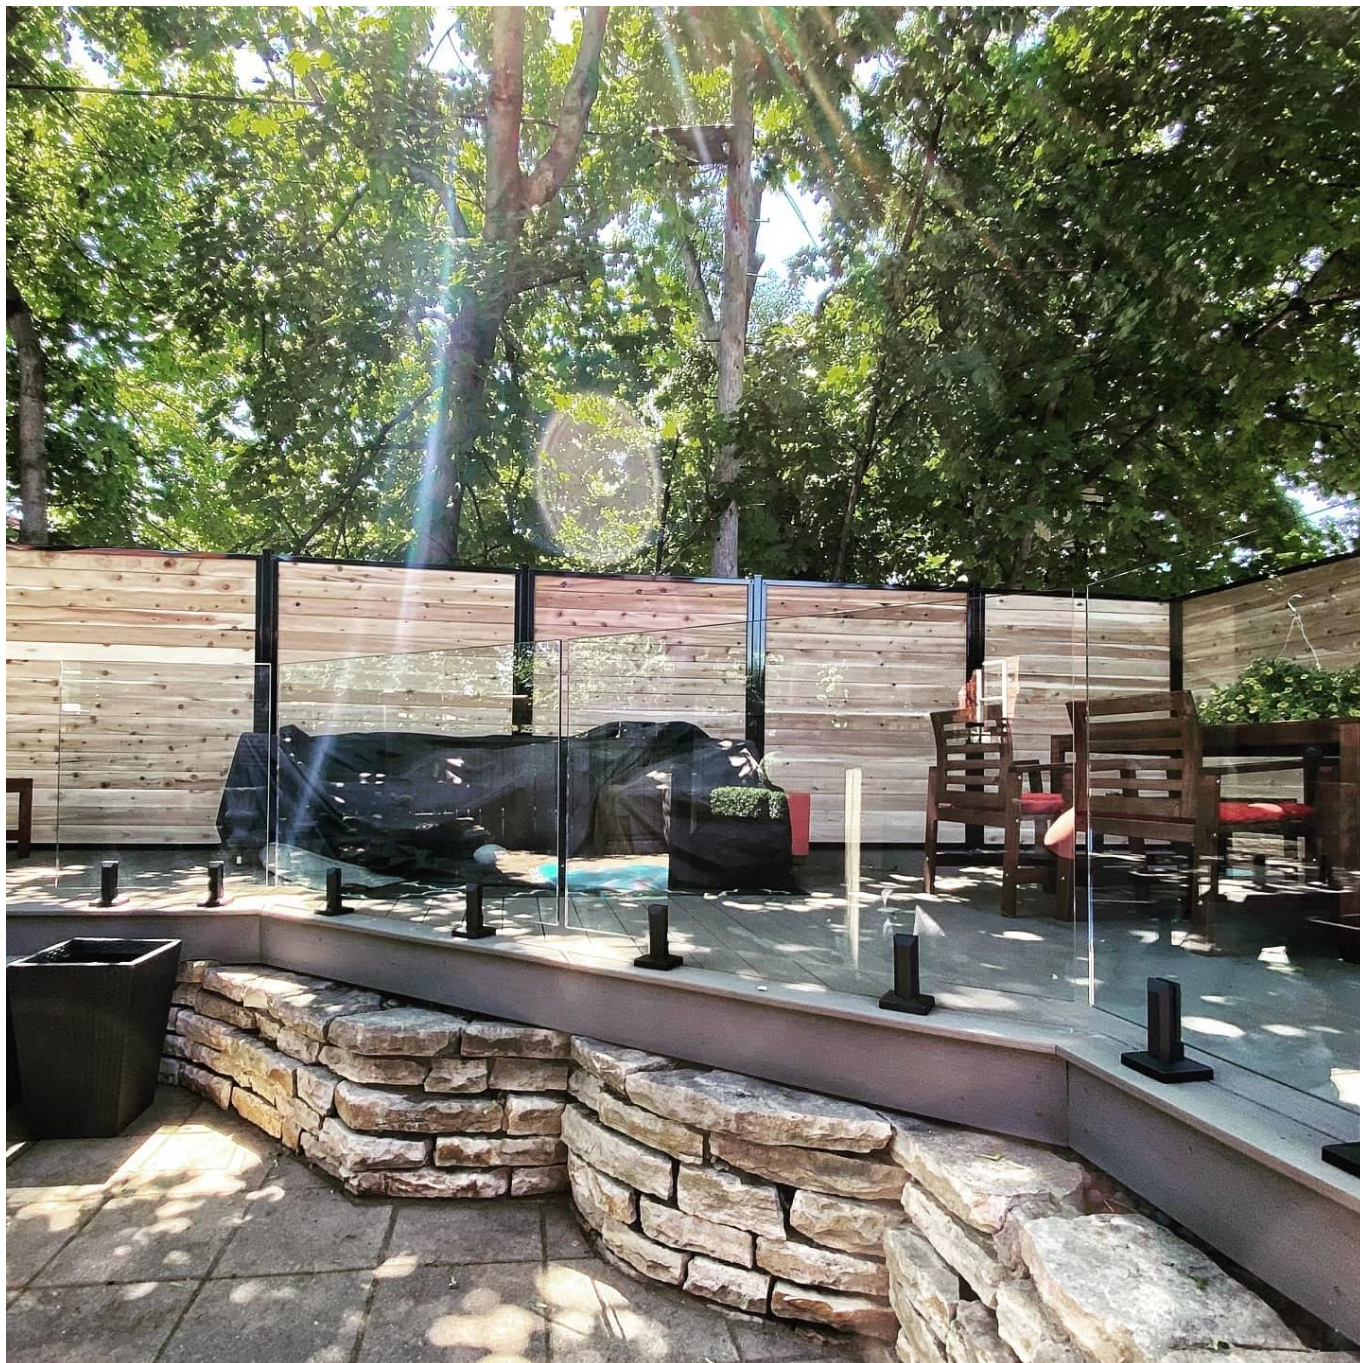

Nous avons également des charnières en verre et des loquets magnétiques et des pinces de verre et du verre trempé pour aller avec l'ensemble du système de garde-corps en verre sans cadre.

N'hésitez pas à nous contacter maintenant pour obtenir des devis!

Shenzhen lance Co., Ltd

Vérfié par SGS, rapport n ° 19536352_P + T

Office Ajouter:

B5-003, 5 / F-Block 3, Yilida Building, N ° 1092 Nanshan Road, District de Nanshan, Shenzhen, Chine, Code Postal 518054

Tél: 86-755-86037559 Fax: 86-755-86372611

MOB (WhatsApp, Wechat, Viber) +86 135 9027 3543

Contact: Celia Chen