


HOT-DPIG GALVANISÉ Balcon Balcon Balcon Sécurité Sécurité Balcon Balustrade

Nom du produit	Balustrade en acier galvanisé	Taille régulière	H 1.1 m * w 1,2 m
Limiter	2 m	Épaisseur du tube	1.2-2.5 mm
Démarrer le lot	20 m ou 20□	Lieu de produit	Province de Guangdong, Chine
Matériel	Acier	Méthode de calcul du prix unitaire	Hauteur inférieure à 1,2 m en mètres, hauteur supérieure à 1,2 m de surface
Artisanat	assemblé et soudé	Traitement de surface	Couvert de poudre





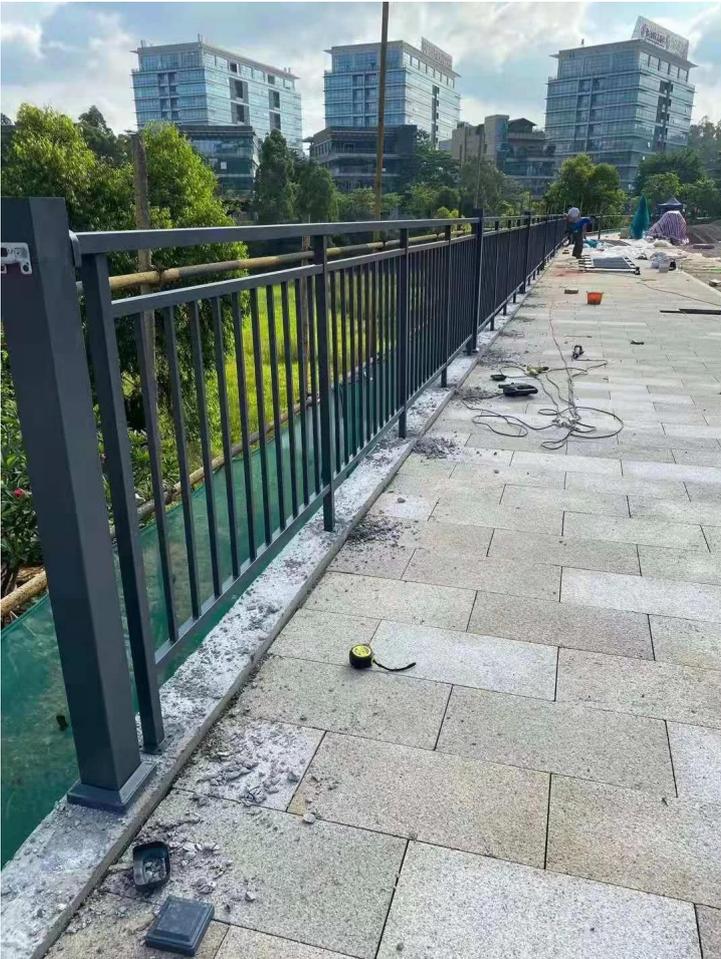

Assemblée:














Guides d'installation:

Guard Rail Assembly Instructions

Tools Required: Electrical Power Drill
(Impact Drill Preferred)

Overview: Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.



² Double check posts are parallel and tight against inside rail before marking holes for drilling.

¹ Inside rail will be loose until each post is secured to the ground.


³ Push and pull top rail & inside rail to ensure all is secure.

Production Et emballage de escalier acier mains courantes à notre atelier:



KEBIL®

SHENZHEN LAUNCH CO., LTD

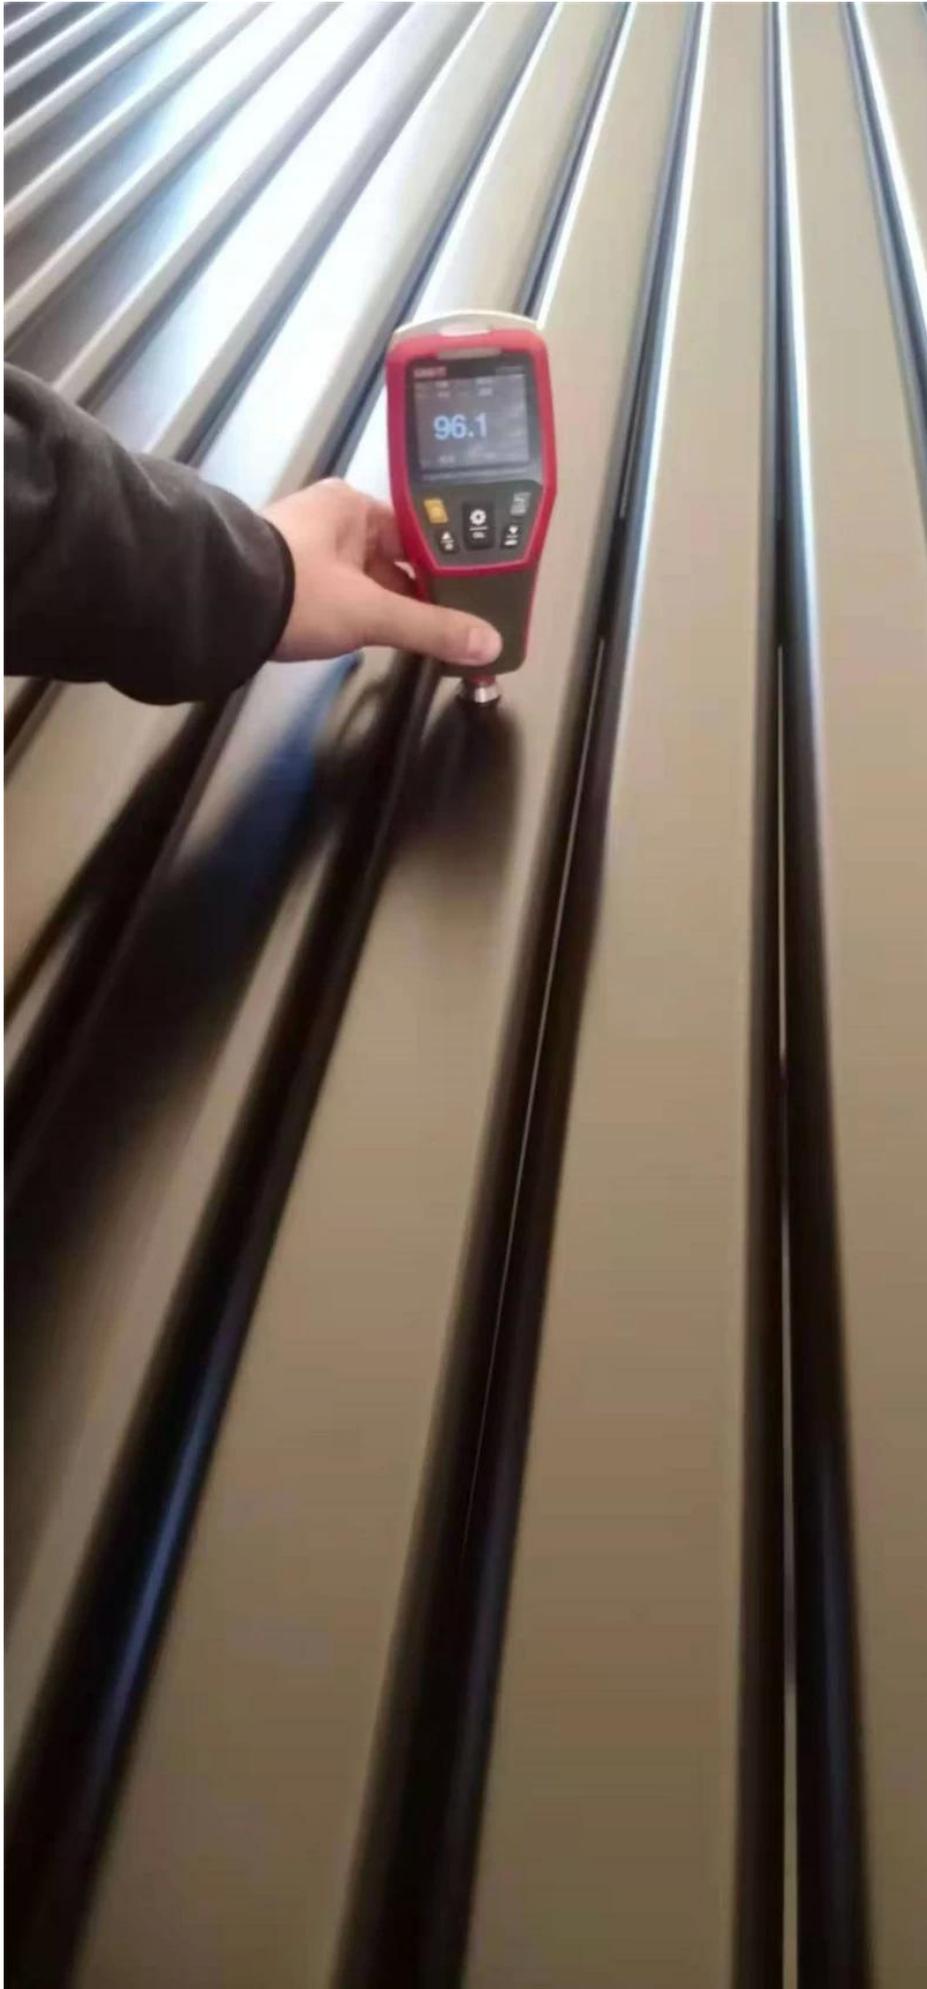





S'il te plaît ressentir libre à contact nous pour Suites des détails:

Contact: Veille

E-mail:sales03@launch-china.cn

HP / WhatsApp:+8613686807796