Garde-corps en acier inoxydable Système de garde-corps en verre de main courante d'escalier en acier inoxydable en gros

1	Matériel et finition	Acier inoxydable 304/316; Finition satinée ou miroir
2	la taille	1000 MM / taille personnalisée
3	Poteau de poteau	Tube D50.8 * 1.5 (mm); Support de rail supérieur réglable en 4 directions; Pince à verre carrée ou ronde.
4	Rail supérieur	Tube creux D50.8 * 1.5 (mm)
5	Garde-corps de sécurité	Panneau en verre transparent trempé de 10 mm / 12 mm
6	Utilisation & Emplacement	Balustre, balustrade, rampe, clôture, main courante, garde-corps; Balcon, Pont, Terrasse, Jardin, Patio, Piscine, Porche, Escalier, Terrasse
7	Installation	Montage supérieur / latéral
8	Paquet	EPE + boîte intérieure + carton

LCH-106

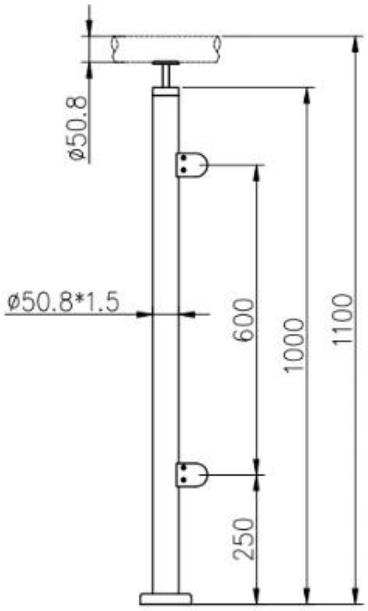

LCH-107

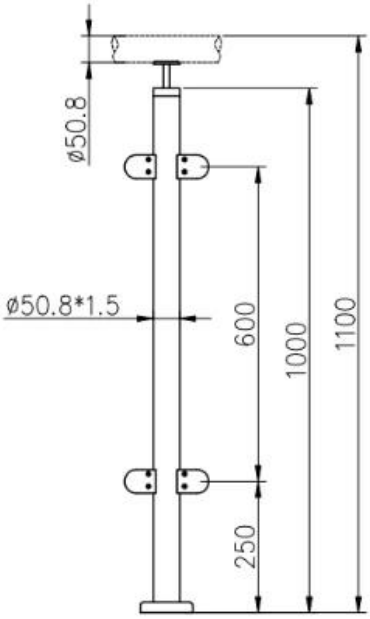

LCH-108

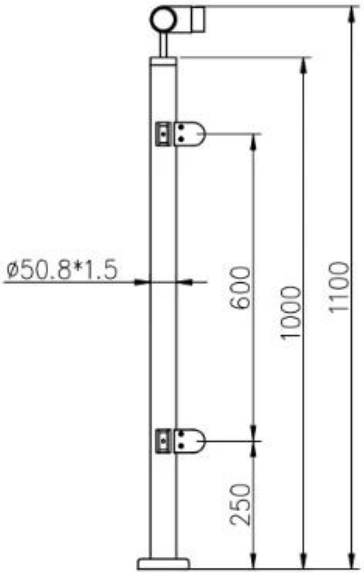

Installation:

Glass Clamp Installation Guide

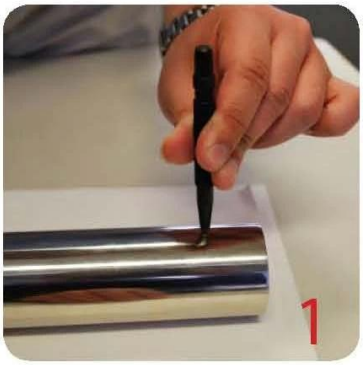

Mark and centre punch desired location of blind rivet nut location.

Drill centre punched hole in tube to suit blind rivet nut.

Insert blind rivet nut into tube and fasten with blind rivet tool.

Check installed blind rivet nut is secure and ready for install.

Align half glass clamp with blind rivet nut inline position. Screw in button head cap screw into thread and tighten with hex key.

Select appropriate rubber gasket to suit glass panel thickness. Install rubber gasket into both sides of glass clamp. (Note rubber gasket marked with sizes).

If heavier clamping load is required please use supplied glass clamp pin, during the install process. Note glass panels will require drilling in order to fit glass clamp pins.

Fit glass panel into position, install second half of glass clamp secure with provided hex screws.

Tighten glass clamps with hex key, and check glass panel are secure with no movement.

Projet spectacle

Garde-corps en acier inoxydable Système de garde-corps en verre de main courante d'escalier en acier inoxydable en gros

Pour balcon balustrade dessins:

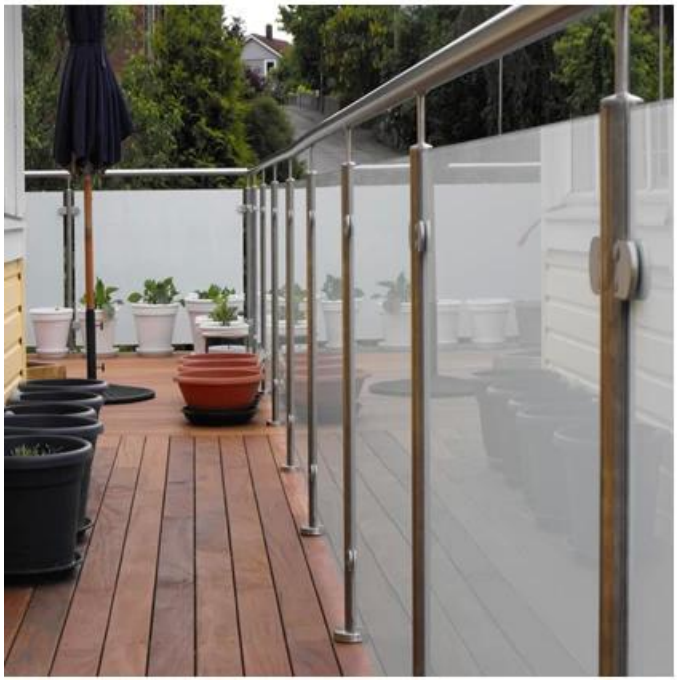

Bienvenue à contact nous:
Eve Chow
sales03@launch-china.cn
HP / WhatsApp / WeChat: +8613686807796