Le lancement de Shenzhen peut produire une charnière en verre chargé à ressort pour la fécule de verre de piscine, une charnière en verre d'une paire peut transporter une porte en verre de 30 kg, une épaisseur de paroi de porte préfère à 8-12 mm. Ici introduit ci-dessous plusieurs types pour votre examen. Accueillez vos demandes.

Émission de produits

Spring loaded hinges

Stainless steel spring loaded hinges

-Made of SS 316

- For use of 8-12.76mm glass

Maximum door leaf weight : 30 kg /pair

Maximum door leaf width : 900mm

Spring can be adjusted for closing speed control .

Type de verre au verre

N ° de modèle:G-g

KEBIL科比奥®

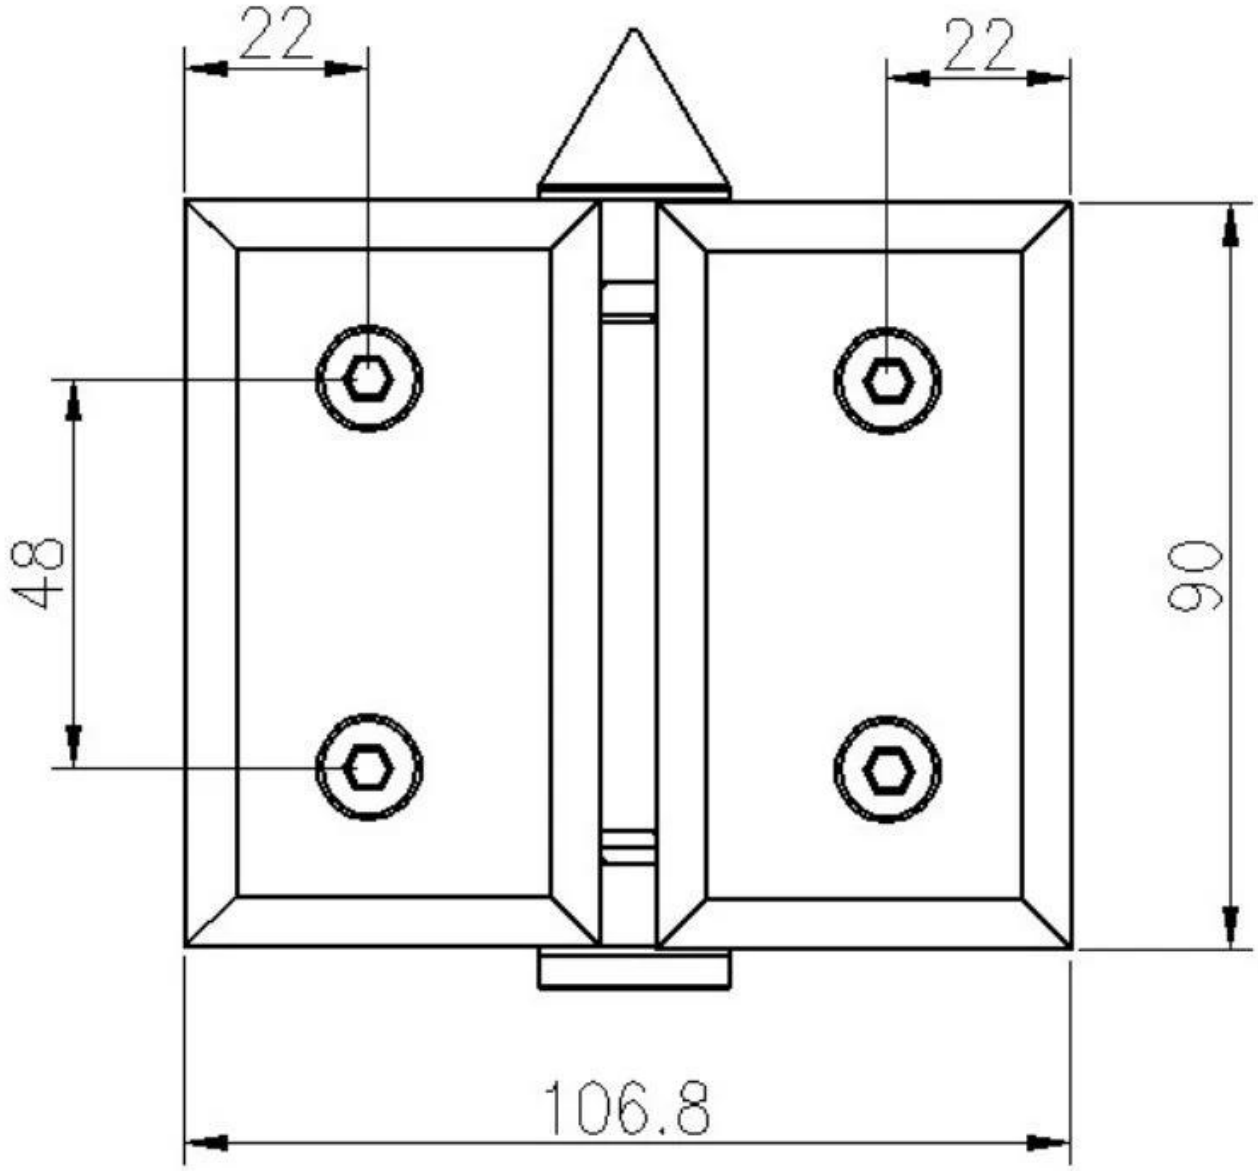
22
22
48
90
106.8

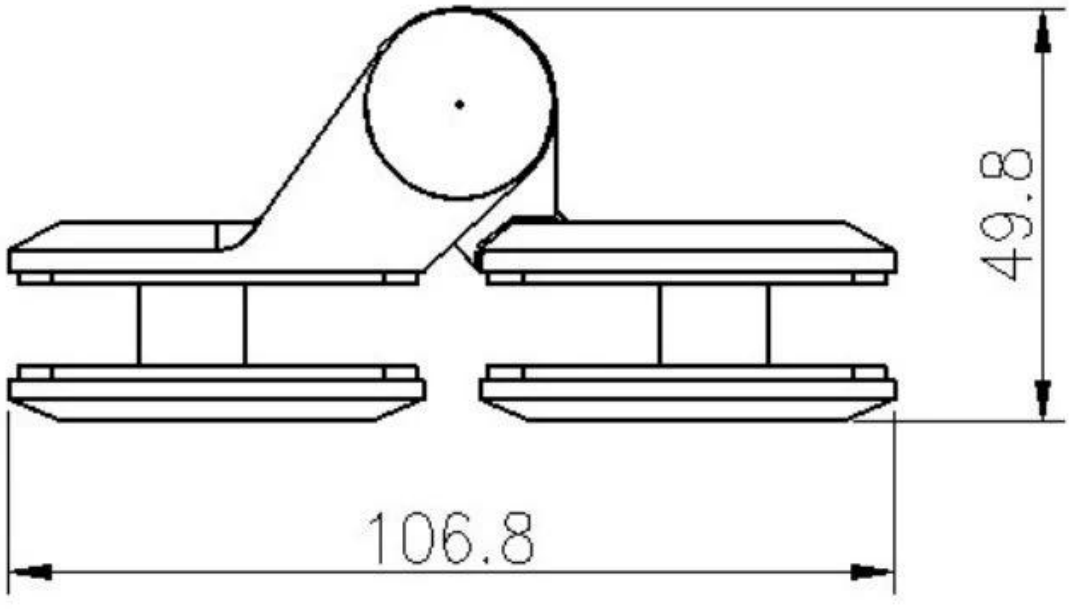
49.8
106.8

KEBIL科比奥
www.launch-china.cn

Instructions for adjusting tension on Glass to Glass hinge

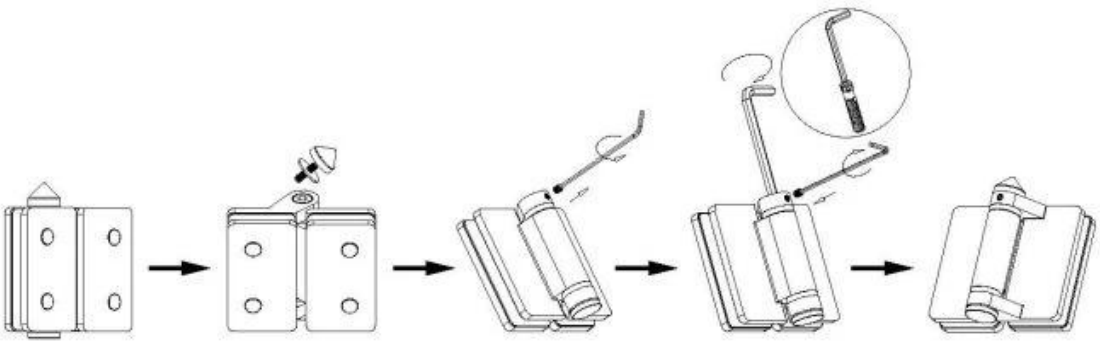

STEP 1
Remove cone and grub screw by turning anticlockwise to reveal tension pin.

STEP 2
Remove grub screw from side of hinge with Allen Key supplied.

STEP 3
Turn the tension pin clockwise to the next hole in tension pin,then tighten the grub screw, repeat this process a Maximum of three times or 360°, Do not over tension.

Type de verre au mur

N ° de modèle:G-w

KEBIL科比奥®

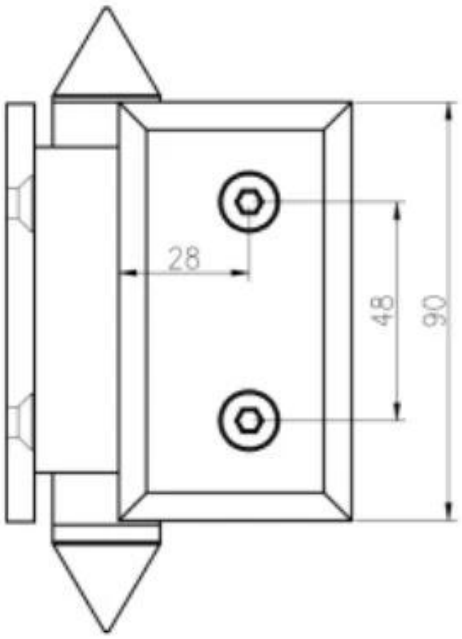

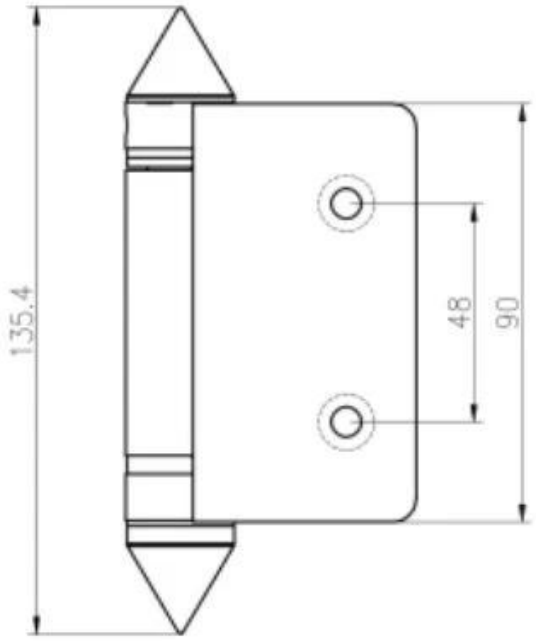

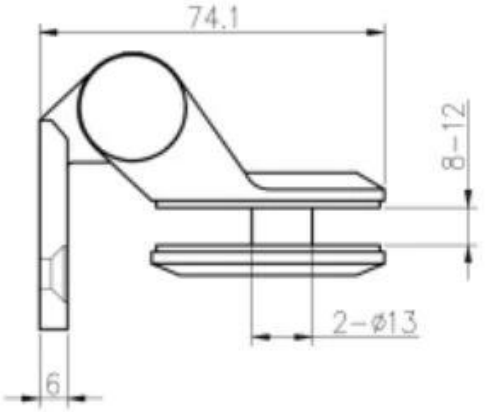

G-W

KEBIL科比奥
www.launch-china.cn

Instructions for adjusting tension on Glass to Wall hinge

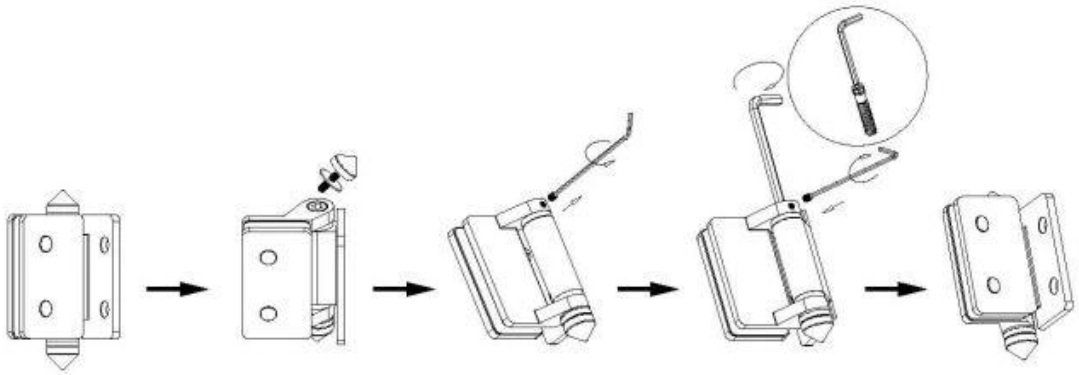

STEP 1
Remove cone and grub screw by turning anticlockwise to reveal tension pin.

STEP 2
Remove grub screw from side of hinge with Allen Key supplied.

STEP 3
Turn the tension pin clockwise to the next hole in tension pin,then tighten the grub screw, repeat this process a Maximum of threee times or 360°, Do not over tension.

Type de verre à rond

N ° de modèle:G-r

KEBIL科比奥®

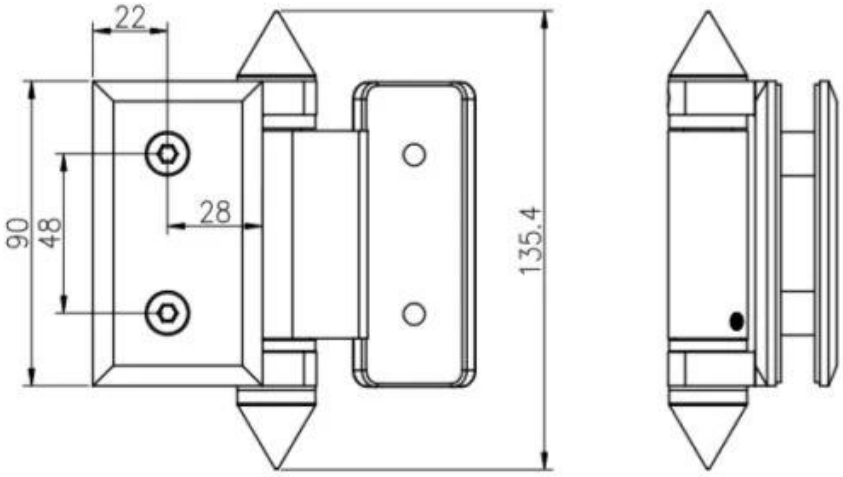

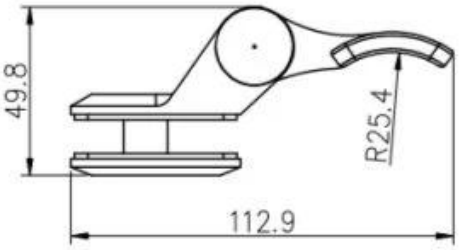

深圳市钥驰商贸有限公司 SHENZHEN LAUNCH CO., LTD.				表面处理		比 例
设 计	Jacky	图号:G-R		材 料		1:1.5
校 对				未注实体尺寸公差		
工 艺				线性公差	X. ±0.1	
审 核			版 次		X.X ±0.1	
批 准			V001		X.XX ±0.1	
				角度公差	X. ±1°	
					X.X ±0.5°	

KEBIL科比奥
www.launch-china.cn

Instructions for adjusting tension on Glass to Round post hinge

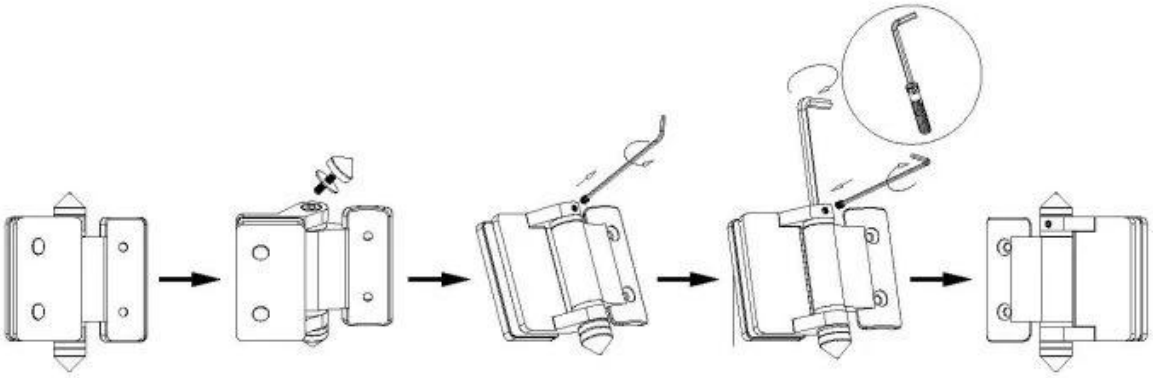

STEP 1
Remove cone and grub screw by turning anticlockwise to reveal tension pin.

STEP 2
Remove grub screw from side of hinge with Allen Key supplied.

STEP 3
Turn the tension pin clockwise to the next hole in tension pin,then tighten the grub screw, repeat this process a Maximum of three times or 360°, Do not over tension.

Production de masse

EmballagePicturer

Application Picture

KEBIL科比奥®
SHENZHEN LAUNCH CO.LTD
LAUNCH INTERNATIONAL LIMITED

KEBIL科比奥® SHENZHEN LAUNCH CO.LTD
LAUNCH INTERNATIONAL LIMITED

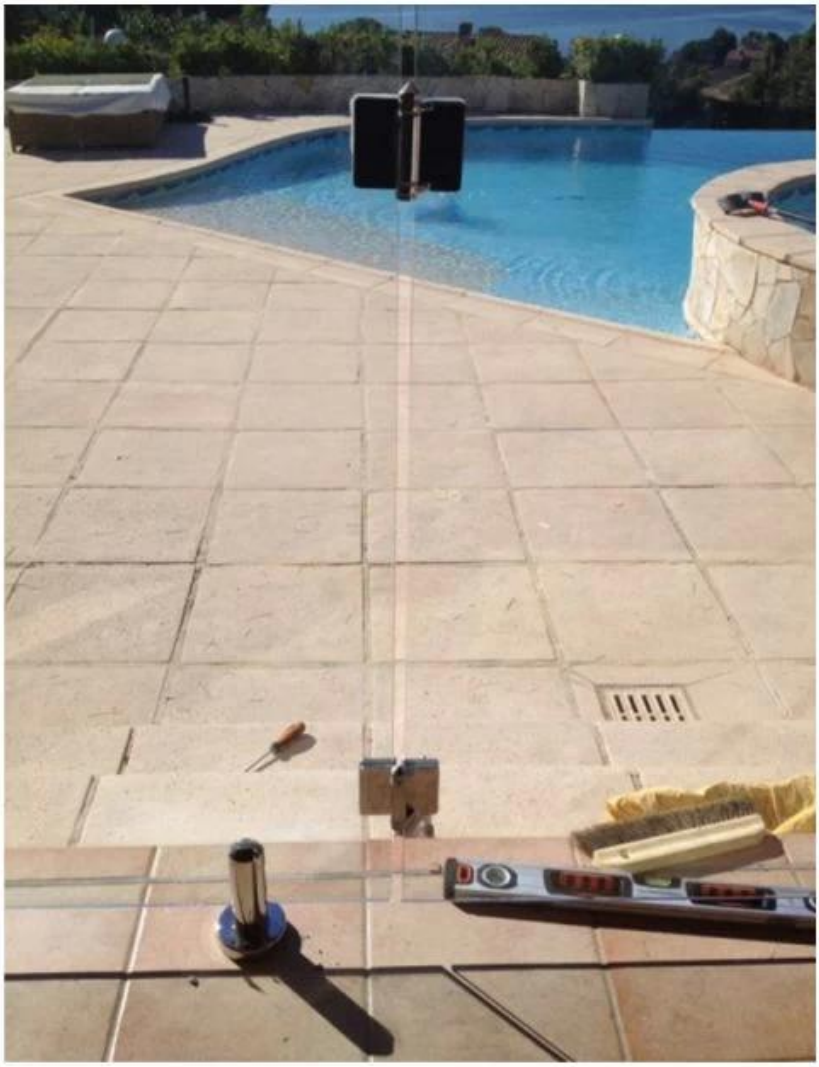

Autreen relationdes produits

Spring loaded hinges

Stainless steel spring loaded hinges

-Made of SS 316

- For use of 8-10mm glass

Maximum door leaf weight : 20 kg /pair

Maximum door leaf width : 900mm

Spring can be adjusted for closing speed control .

Part # G-G2

Part # G-R2

Part # G-W2

G-G 1

G-R 1

G-W 1

Si vous avez des intérêts, n'hésitez pas à me contacter.

Franc fang

Téléphone / Wechat / WhatsApp: +8615906261741

Email: sales02@launch-china.cn