Πιστοποίηση SGS Η Alibaba επιβεβαίωσε χρυσό συν προμηθευτή και 12 χρόνια συμμετοχής

COMPANY INTRODUCTION



Alibaba.com Gold Plus Supplier

Main Product Lines Verification Report

Presented to

Shenzhen Launch Co., Ltd.

深圳市朗驰商贸有限公司

Company Address	B5003, Building 3, Yilida Building, No. 1092 Nanshan Avenue, Dengliang Community, Nanshan Street, Nanshan District, Shenzhen City, Guangdong Province, China
Consigner of Assessment:	Alibaba
Gold Supplier Member ID:	launch168
Gold Supplier Company Name:	Shenzhen Launch Co., Ltd.
Contact Person:	Mr. Binfeng Gao
Phone Number:	0086-13802569770
Fax Number:	0086-755-86372611
Email:	gbf999@china.com
Website Address (URL):	http://launch-china.en.alibaba.com

Service Provided by SGS Report No.: 19536352_P+T





Alibaba.com Gold Plus Supplier



Assessment Report

Presented to

Cooperation Company of Shenzhen Launch Co., Ltd.

深圳市朗驰商贸有限公司合作工厂

Gold Supplier & Assessed Company Relationship:	☐ Self-owned ☐ Wholly Owned ☐ Shareholder/Partner☐ Kindred between Owners ☐ Cooperation Partner
Company Address	Confidential
City / Country:	Huizhou / China
Consigner of Assessment	Alibaba & Shenzhen Launch Co., Ltd.
Gold Supplier Member ID:	launch168
Gold Supplier Company Name:	Shenzhen Launch Co., Ltd.
Contact Person:	Confidential
Phone Number:	Confidential
Fax Number	Confidential
Email:	Confidential
Website Address (URL):	http://faunch-china.en.alibaba.com

Service Provided by SGS Report No.: 19552720_P





WHY CHOOSE US



15 YEARS EXPERIENCE

We have been manufacturing railing hardwares since 2004.



ONE STOP SERVICE

We provide integrated railing solutions.
We manufacture.
We deliver



PROFESSIONAL R&D TEAM

We have engineering experts for developing new products.



TOP QUALITY & GOOD PRICE

We are strict on quality control as well as cost evaluation.



ABOUT US

Shenzhen Launch Co., Ltd was established in 2004, located at Nanshan District, Shenzhen, and one hour by car from Hongkong International Airport. Our main products are high-grade building materials including stainless steel balustrade post, staircase handrail, balcony guardrail, swimming pool fence and other high-grade building materials. All the products are designed strictly according to the high-end market requirements. We have our own factory in Tangxia Town, Dongguan,with more than 50 sets of various precision equipments, such as CNC lathe, milling machine, punching machine, pipe cutter, argon welder, drilling machine, polisher, etc. which can provide customers with complete product processing services.

Μπαλκόνι Κιγκλιδώματα 12mm Γυάλινο φράχτη 2205

Στοιχεία γυάλινου φράκτη 2205


- Υλικό: διπλής όψης από ανοξείδωτο χάλυβα 2205
- Φινίρισμα: καθρέφτης / σατέν / μαύρο / χρυσό χρώμα
- Για πάχος γυαλιού 10-13.52mm
- Τοποθέτηση: τοποθέτηση δαπέδου / τοποθέτηση επιφανείας / τοποθέτηση τρυπανιού πυρήνα
- Κατασκευαστής methed: χύτευση (υψηλής ποιότητας)
- MOQ: 1 τεμάχιο
- Γνωρίστε τις βαρέλια ασφαλείας AS1926.1-20012 / AS2820 της Αυστραλίας για την περιπλοκή της πύλης πισίνας
- Εφαρμογή: φράχτη πισίνας, μπαλκόνι, κατάστρωμα, σκάλες, βεράντα ... φράχτη από γυάλινο κιγκλίδωμα

4 μοντέλα ποτήρι φράκτης 2205 τάπα διαθέσιμος




Πυρήνα γυαλιού με τρυπάνι πυρήνα



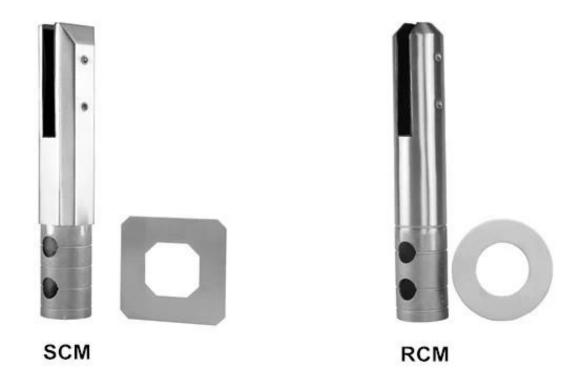

Core Drill Duplex 2205 Spigot

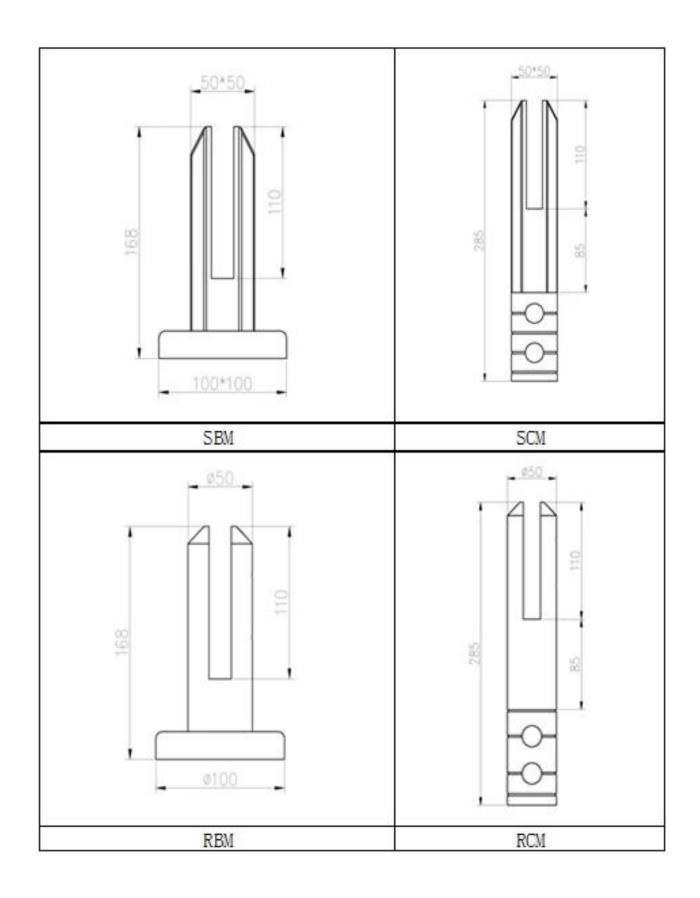

Ποτήρι φράκτης 2205 τάπα εγκατάσταση



fixing method: base plate spigots


Mark out the centre line of proposed glass fence with a chalk line. Determine clamp location based on a sheet size (recommendation on pages 1 & 2). Use base plate as a template to mark out the hole positions and drill holes to suit.


Note: Do not exceed 100mm gaps between glass panels. Optimum gap is 40mm to 60mm

Now the base plated spigots can be fitted to the floor and plumbed via shims (not supplied) under the base plates. Be sure to tighten firmly as the smallest of movement at the base plate will result in noticeable movement at the bottom of the glass fence.

Tip: By setting the two outer spigots of your total span, a string line can be run in the 'throat' of the spigots, giving correct height for all spigots in between

Note: Do not exceed 100mm gap from the fixing surface to the bottom of the glass






When all spigots are installed, slip domical cover the top of the spigot to hide fixings. It will be necessary to turn the adjustment screws on the spigot face all the way in to allow cover to pass over

Note: Same installation method applies to round base plate spigot

domical cover

The glass is then installed to the spigots. Place plastic packers between glass & spigot, at no stage should glass touch the metal **How adjustability works:**

- 1. Place glass in spigot
- 2. Fix/ tension glass both sides with allen key



Ποτήρι φράκτης 2205 τάπα έργο φωτογραφίες





Αλλα προϊόντα εσύ ενδέχεται ενδιαφέρον

- Γυάλινο φράχτη 2205 γυάλινο / χρυσό
- Αφαιρούμενο κάλυμμα / κάλυμμα χειρολαβής από ανοξείδωτο χάλυβα
- Μαγνητικό μάνδαλο και ελατηριωτή άρθρωση









Marine duplex 2205 electroplate black spigot







Επικοινωνία

Ευχαριστούμε για την επίσκεψη! Οποιαδήποτε ερώτηση ή ερώτηση, αφήστε ένα μήνυμα. Θα σας επιστρέψει μέσα σε 24 ώρες.

Οποιαδήποτε επείγουσα έρευνα, παρακαλούμε επικοινωνήστε μαζί μας παρακάτω:

-Επικοινωνήστε με: Δοσί

-HΛΕΚΤΡΟΝΙΚΗ ΔΙΕΥΘΥΝΣΗ: sales04@launch-china.cn

-Το γραφείο: (86-755) 86037559

-Mob / whats app: 0086-13530506265

-Skype: launch_04