

Μεντεσέδες γυάλινης πόρτας υδραυλικού τύπου από ανοξείδωτο χάλυβα για γυάλινη περίφραξη πισίνας χωρίς πλαίσιο η καλύτερη επιλογή για γυάλινες πύλες.

-Μοντέλο Νο.B-90

- Κατασκευασμένο από SS 304

-Για χρήση γυαλιού 8-13,52mm

-Μέγιστο βάρος φύλλου πόρτας: 45 kg /ζευγάριΜέγιστο πλάτος φύλλου πόρτας:1000mm

-Μέγιστο ύψος πόρτας: 2100mm




-Καθαρό βάρος: 979g/τεμ

B-90 B-180 Hydraulic Buffer Glass Door Hinges' Specification

Application range & glass door parameters :

- 1.This series of hydraulic glass hinge is suitable for tempered glass door without frame .
- 2.Suitable for MAX door height $\leq 2100\text{mm}$
- 3.Suitable for MAX door width $\leq 1000\text{mm}$
- 4.Glass door thickness : 8-12mm
- 5.Maximum bearing weight of 45KG/2PCS

Glass door open cut reference graph (figure 1B -90 figure 2B - 180)




After the glass cut , it must be treated with steel processing ,make sure the installation angle between the glass door and the ground is 90°when you install it .

The hydraulic glass door hinge can be adjusted for closing strength for 1 .2 .3 degree

Note:the door must be completely closed before you need to adjust the closing strength .

The regulation method is as follows :

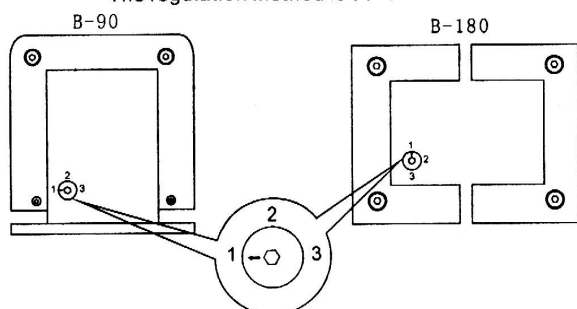

(Twist the arrow to the position of desire strength)

