


Balcone in acciaio annellamento disegni esterni ringhiera giardino in metallo nero patio post metallo ringhiera in metallo

nome del prodotto	Ringhiera del ponte in metallo	Taglia regolare	H 1,1 m * w 1,2 m
Limite alto	2 M.	Spessore del tubo	1,2-2,5 mm
Iniziare il batch	20 m o 20□	Luogo di prodotto	Provincia del Guangdong, Cina
Materiale	Acciaio	Metodo di calcolo del prezzo unitario	Altezza inferiore a 1,2 m in metri, altezza superiore a 1,2 m in quadrato
Artigianato	assemblato e saldato	Trattamento della superficie	Verniciato a polvere



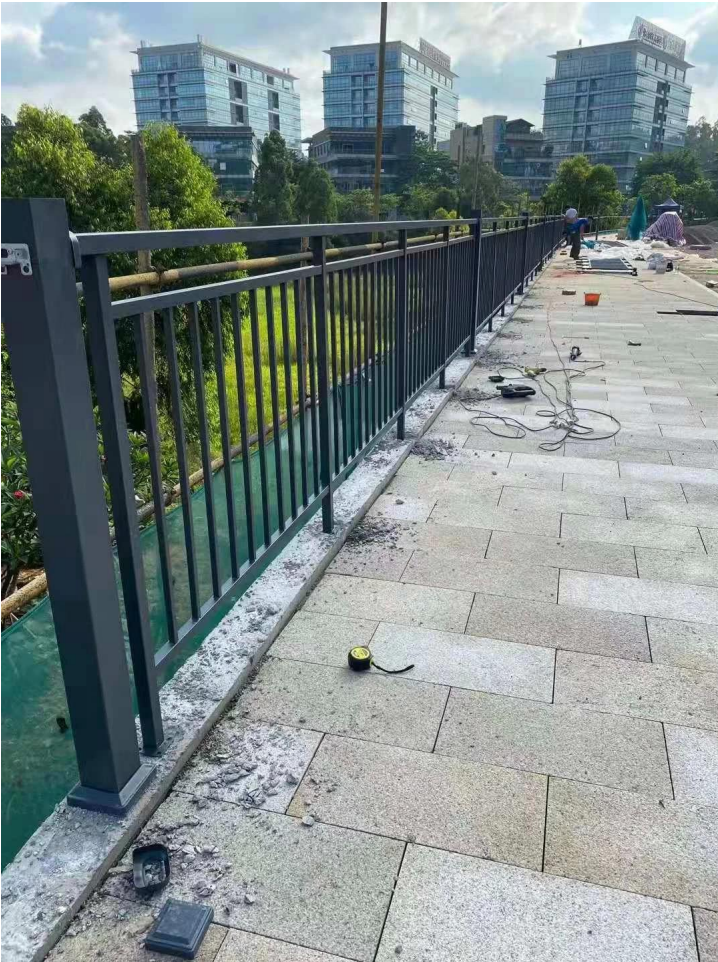

Assemblaggio:














Guide di installazione:

Guard Rail Assembly Instructions

Tools Required: Electrical Power Drill
(Impact Drill Preferred)

Overview: Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.



² Double check posts are parallel and tight against inside rail before marking holes for drilling.

¹ Inside rail will be loose until each post is secured to the ground.


³ Push and pull top rail & inside rail to ensure all is secure.

Produzione&confezionediscalaacciaiocorrimanoanostroWORKSHOP:



KEBIL®

SHENZHEN LAUNCH CO., LTD

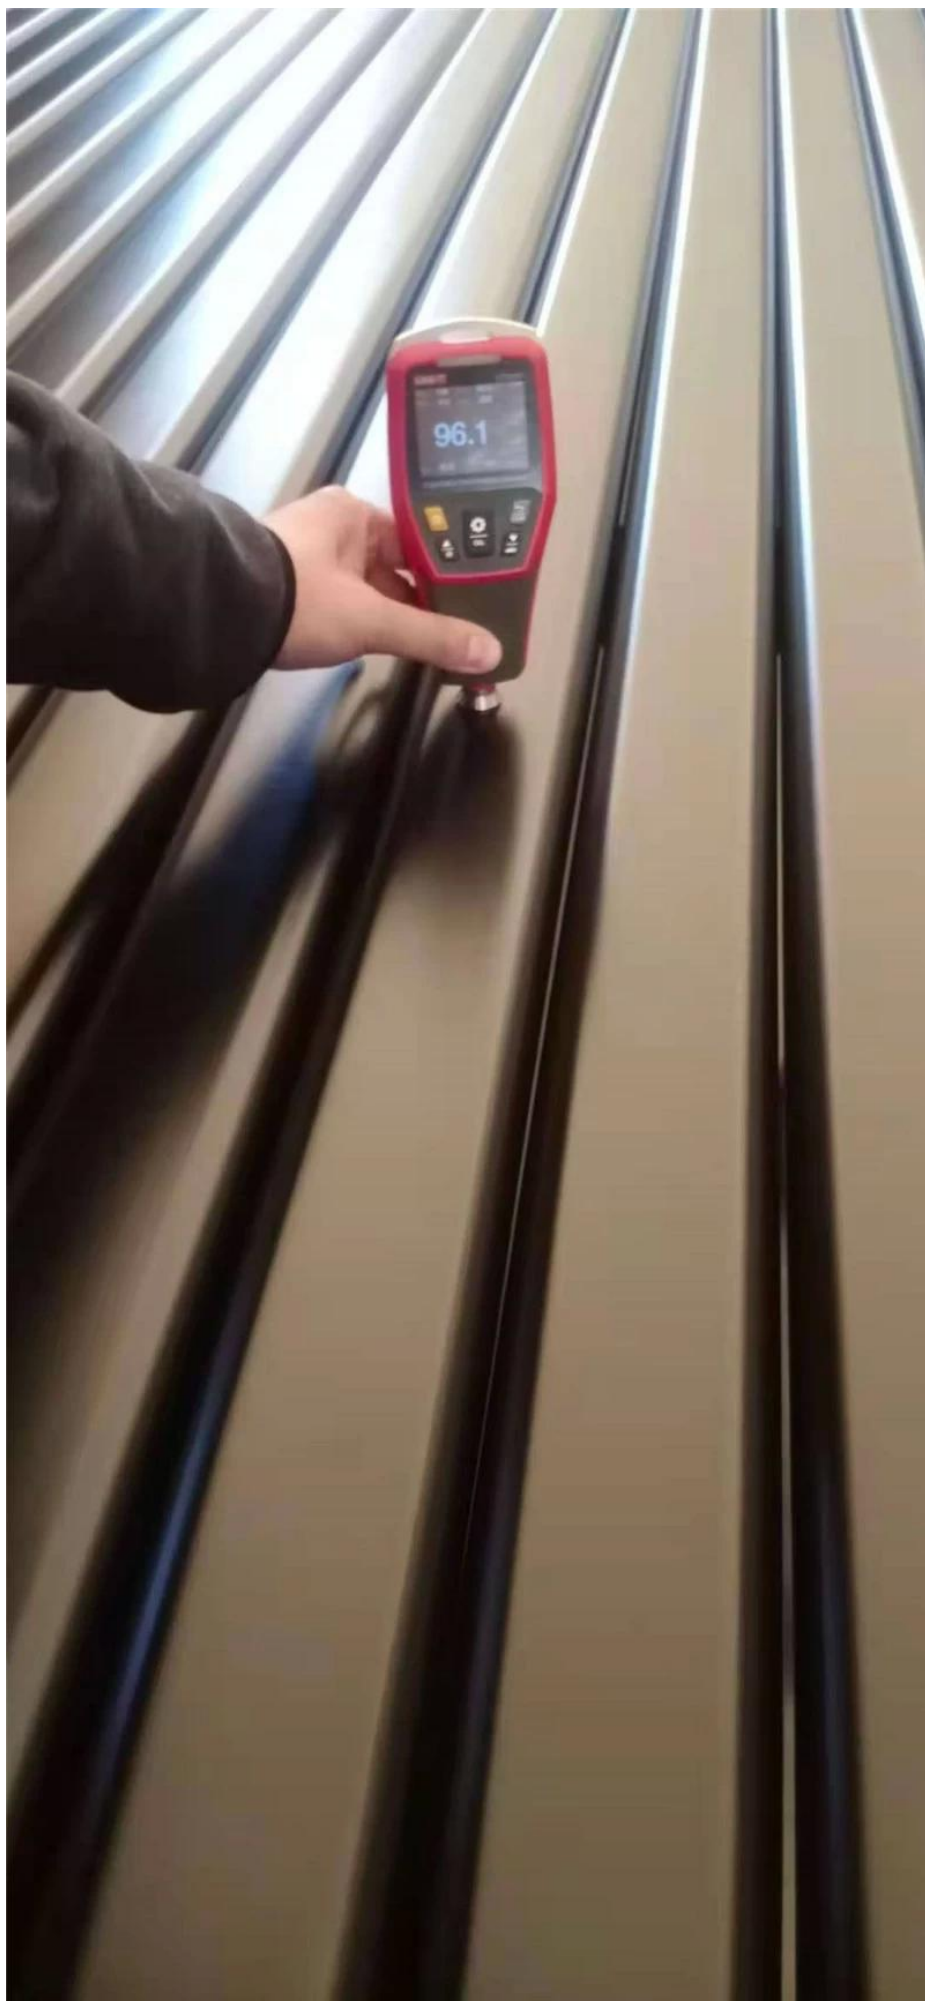





Per favore sentire gratuitamente per contattarci per Di più dettagli:

Contatto: vigilia

E-mail:sales03@launch-china.cn.

HP / Whatsapp:+8613686807796.