

Cerniere per porte in vetro in acciaio inossidabile di tipo idraulico per recinzione per piscine in vetro senza telaio, la scelta migliore per cancelli in vetro.

-Modello n.B-90

-Realizzato in SS 304

-Per l'uso di vetro da 8-13,52 mm

-Peso massimo dell'anta della porta: 45 kg/coppia. Larghezza massima dell'anta della porta: 1000 mm

-Altezza massima della porta: 2100 mm


-Peso netto: 979 g/pz

B-90 B-180 Hydraulic Buffer Glass Door Hinges' Specification


Application range & glass door parameters :

1. This series of hydraulic glass hinge is suitable for tempered glass door without frame .
2. Suitable for MAX door height $\leq 2100\text{mm}$
3. Suitable for MAX door width $\leq 1000\text{mm}$
4. Glass door thickness : 8-12mm
5. Maximum bearing weight of 45KG/2PCS


Glass door open cut reference graph (figure 1B -90 figure 2B - 180)



B-90



B-180




After the glass cut , it must be treated with steel processing ,make sure the installation angle between the glass door and the ground is 90°when you install it .

The hydraulic glass door hinge can be adjusted for closing strength for 1 .2 .3 degree

Note:the door must be completely closed before you need to adjust the closing strength .

The regulation method is as follows :

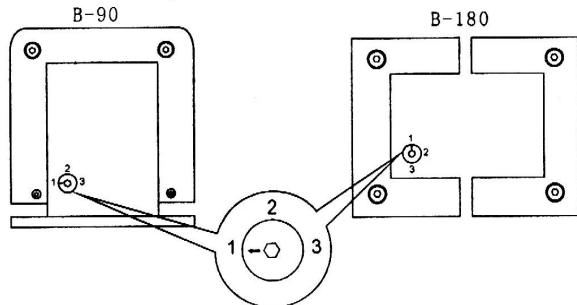

(Twist the arrow to the position of desire strength)

