

Prezzo di FABBRICA Vendita diretta per esterni 2-3 gradini Adatto per kit corrimano in ferro battuto nero Balaustre e corrimano per ringhiere per scale


nome del prodotto	Ringhiera in acciaio zincato	Taglia regolare	H 1,1 M*L 1,2 M
Limite alto	2 M	Spessore del tubo	1,2-2,5 mm
Lotto iniziale	20 mo 20□	Luogo del prodotto	Provincia del Guangdong, Cina
Materiale	Acciaio	Metodo di calcolo del prezzo unitario	Altezza inferiore a 1,2 m in metri, Altezza superiore a 1,2 m in quadrato
Mestiere	assemblato e saldato	Trattamento della superficie	Verniciato a polvere









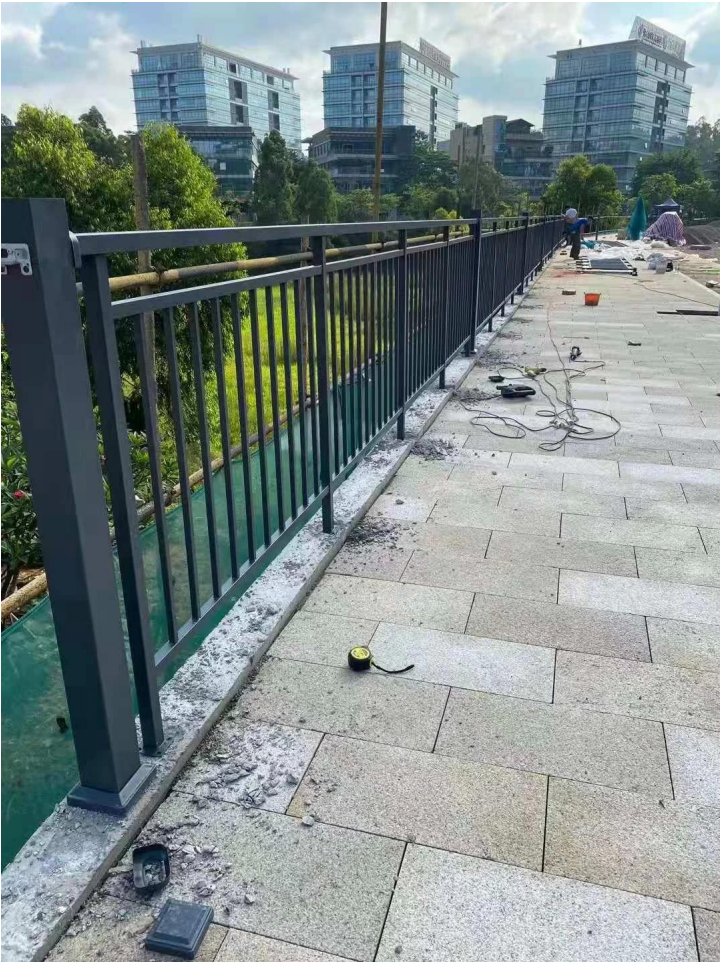

Assemblea:














Guide all'installazione:

Guard Rail Assembly Instructions

Tools Required: Electrical Power Drill
(Impact Drill Preferred)

Overview: Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.



² Double check posts are parallel and tight against inside rail before marking holes for drilling.

¹ Inside rail will be loose until each post is secured to the ground.


³ Push and pull top rail & inside rail to ensure all is secure.

Produzione & confezione Di scala acciaio corrimano A Nostro officina:



KEBIL®

SHENZHEN LAUNCH CO., LTD

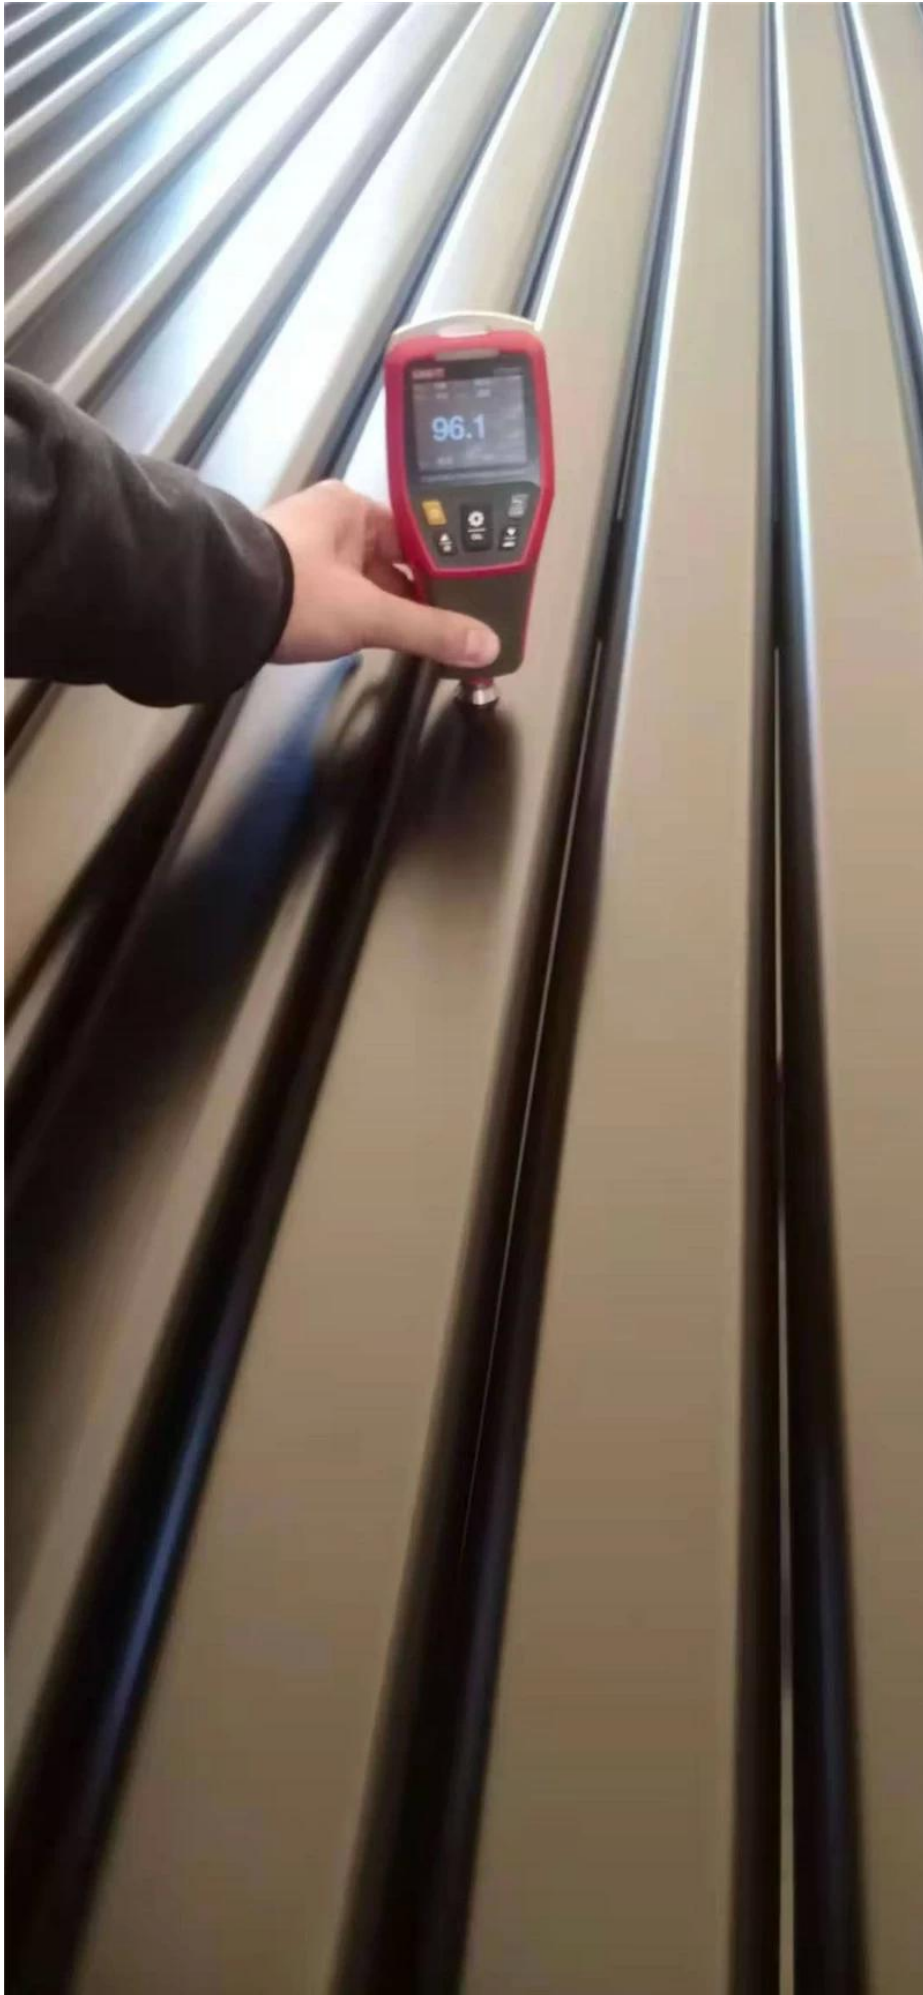





Per favore Tasto gratuito A contatto noi per Di più dettagli:

Contatto: Wendy

E-mail: sales04@launch-china.cn

HP/WhatsApp: 86159 8933 9827