


Handrails galvanizzato Randonaggi di ferro antico Design di ringhiera di balcone con pavimento in acciaio zincato a pavimento galvanizzato

nome del prodotto	Ridinga in acciaio zincato	Taglia regolare	H 1,1 m*w 1,2 m
Limitare il massimo	2 m	Spessore del tubo	1,2-2,5 mm
Batch iniziale	20 m o 20□	Luogo di prodotto	Provincia del Guangdong, Cina
Materiale	Acciaio	Metodo di calcolo del prezzo unitario	Altezza inferiore a 1,2 m in metri, altezza sopra 1,2 m in quadrato
Mestiere	assemblato e saldato	Trattamento della superficie	Verniciato a polvere





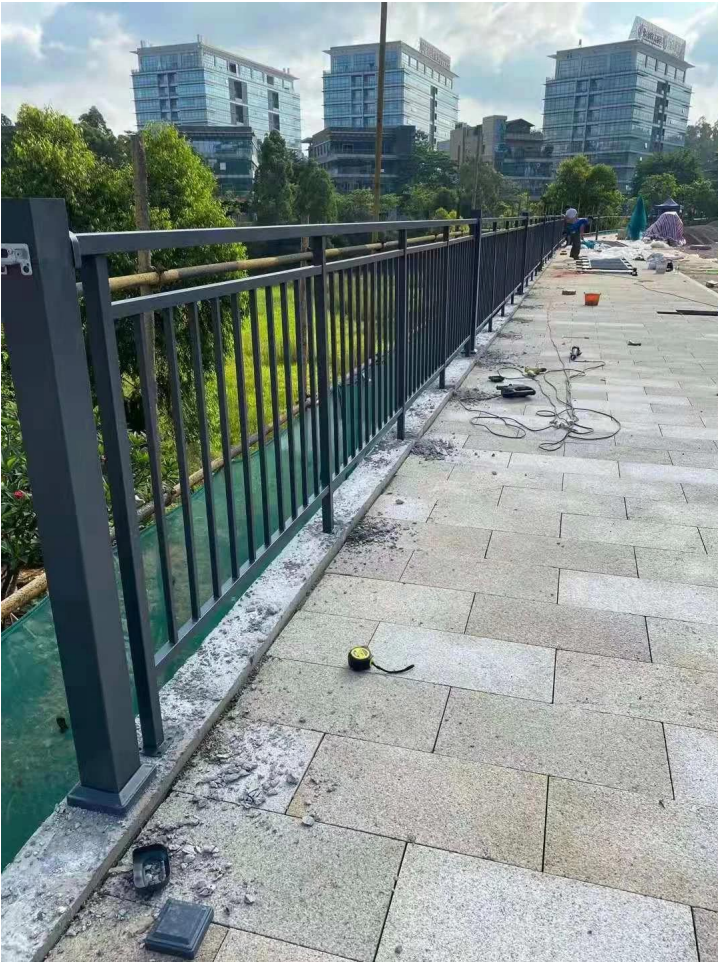

Assemblea:














Guide di installazione:

Guard Rail Assembly Instructions

Tools Required: Electrical Power Drill
(Impact Drill Preferred)

Overview: Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.

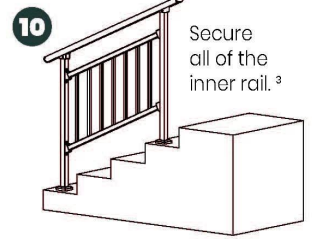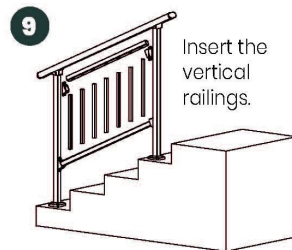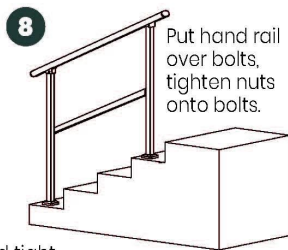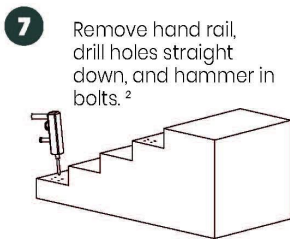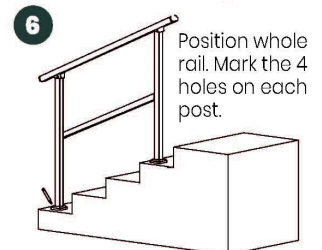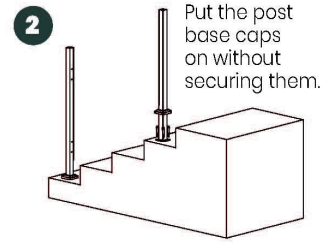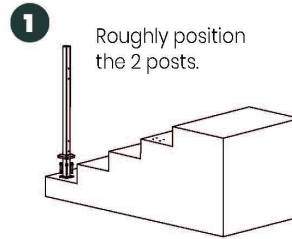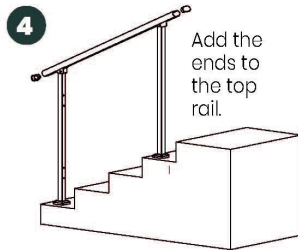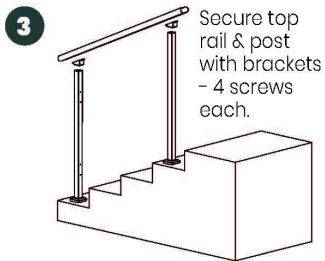

² Double check posts are parallel and tight against inside rail before marking holes for drilling.

¹ Inside rail will be loose until each post is secured to the ground.


³ Push and pull top rail & inside rail to ensure all is secure.

ProduzioneE confezionediscalacciaiocorrimanoAnostroWorkshop:



KEBIL®

SHENZHEN LAUNCH CO., LTD

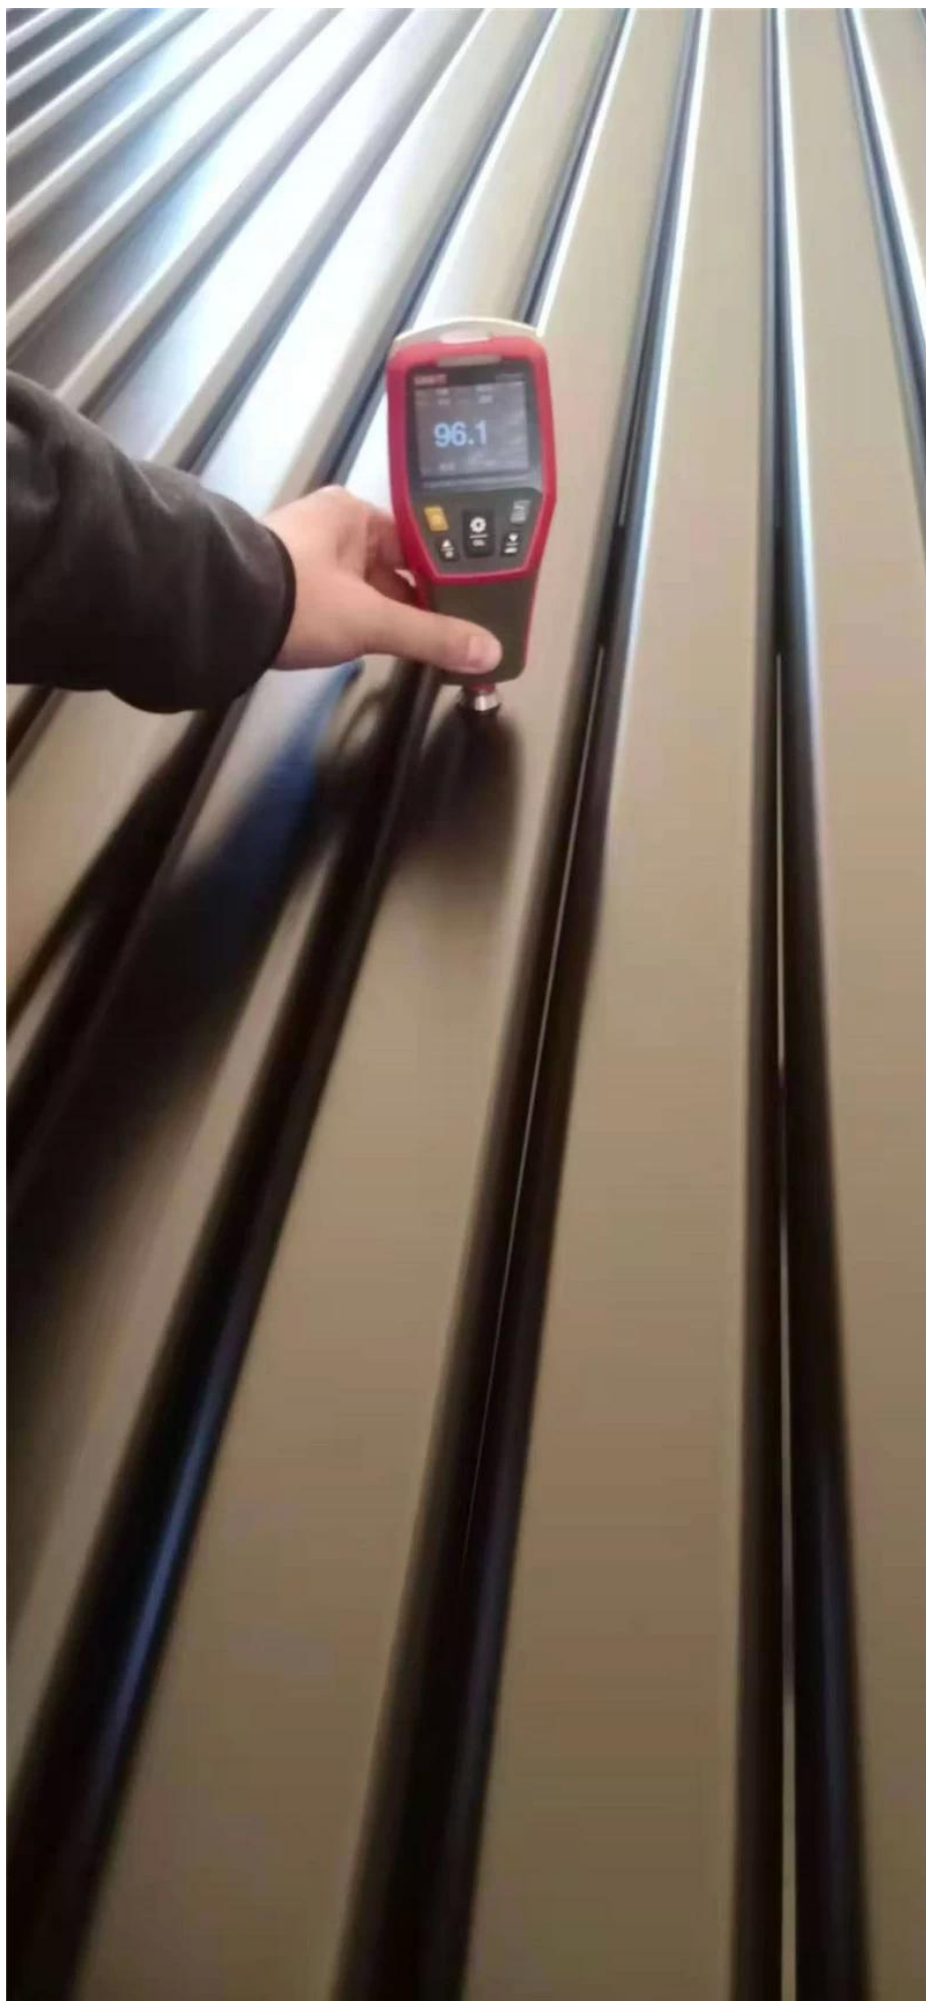





Per favore Tattoliberoacontattonoiperdi piùdettagli:

Contatto:Viglia

E-mail:sales03@launch-china.cn

Hp/whatsapp:+8613686807796