Zincato a caldo recinzione in ferro battuto balcone di sicurezza di sicurezza in acciaio Ringhiera Balcone Balaustra

nome del prodotto	Ringhiera in acciaio zincato.	Taglia regolare	H 1,1 m * w 1,2 m
Limite alto	2 M.	Spessore del tubo	1,2-2,5 mm.
Iniziare il batch.	20 m o 20	Luogo di prodotto	Provincia del Guangdong, Cina
Materiale	Acciaio	Metodo di calcolo del prezzo unitario	Altezza di sotto di 1,2 m di metri, altezza 1,2 m in piazza
Mestiere	assemblato e saldato	Trattamento della superficie	Verniciato a polvere

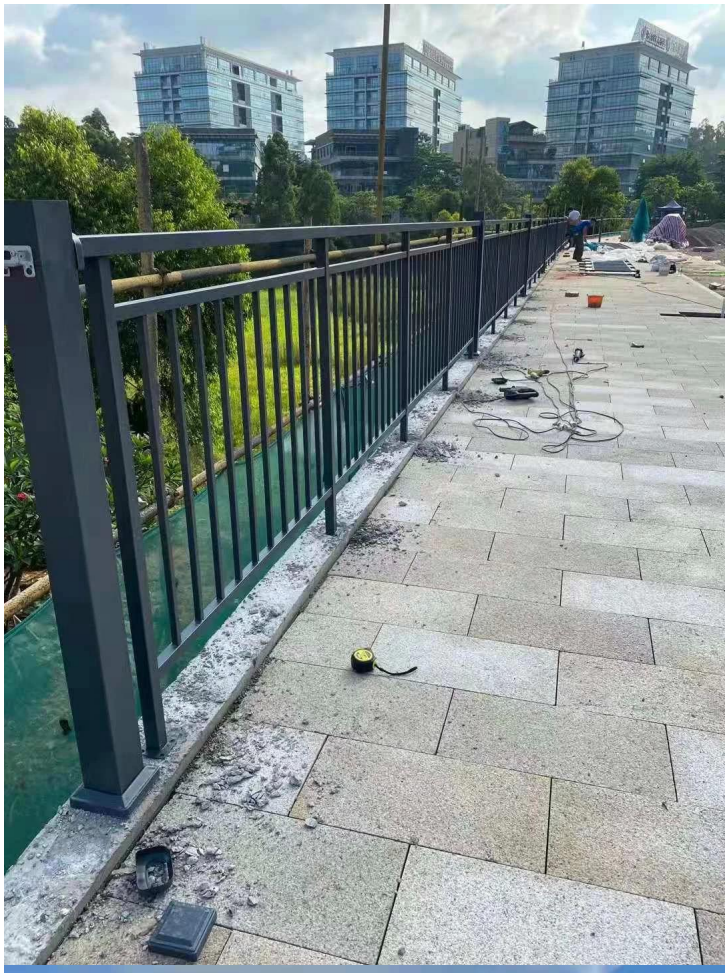

Assemblaggio:

Guide di installazione:

Guard Rail Assembly Instructions

Tools Required: Electrical Power Drill (Impact Drill Preferred)

Overview: Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.

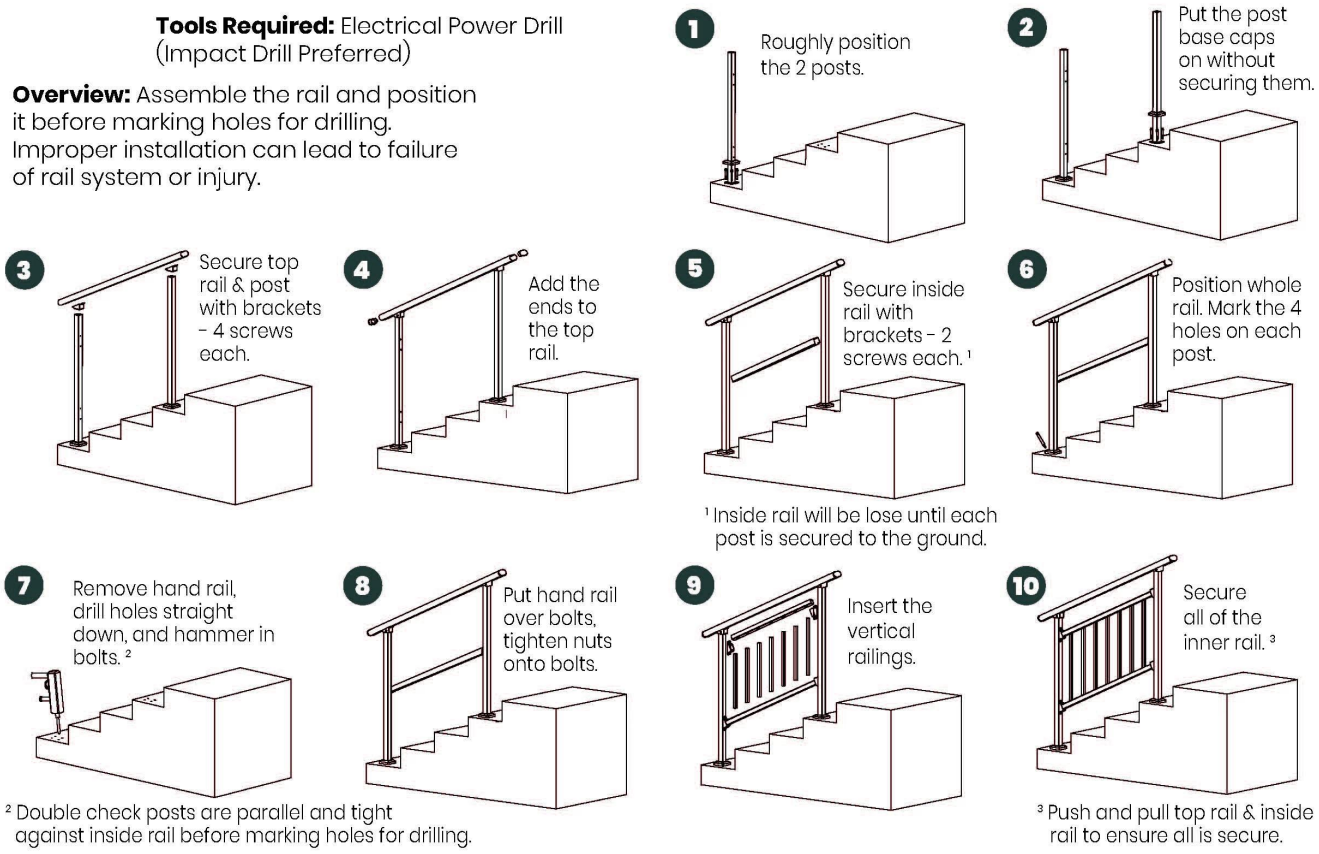

Produzione&confezionediscalaacciaiocorrimanoaNostroWORKSHOP:

KEBIL®
SHENZHEN LAUNCH CO., LTD

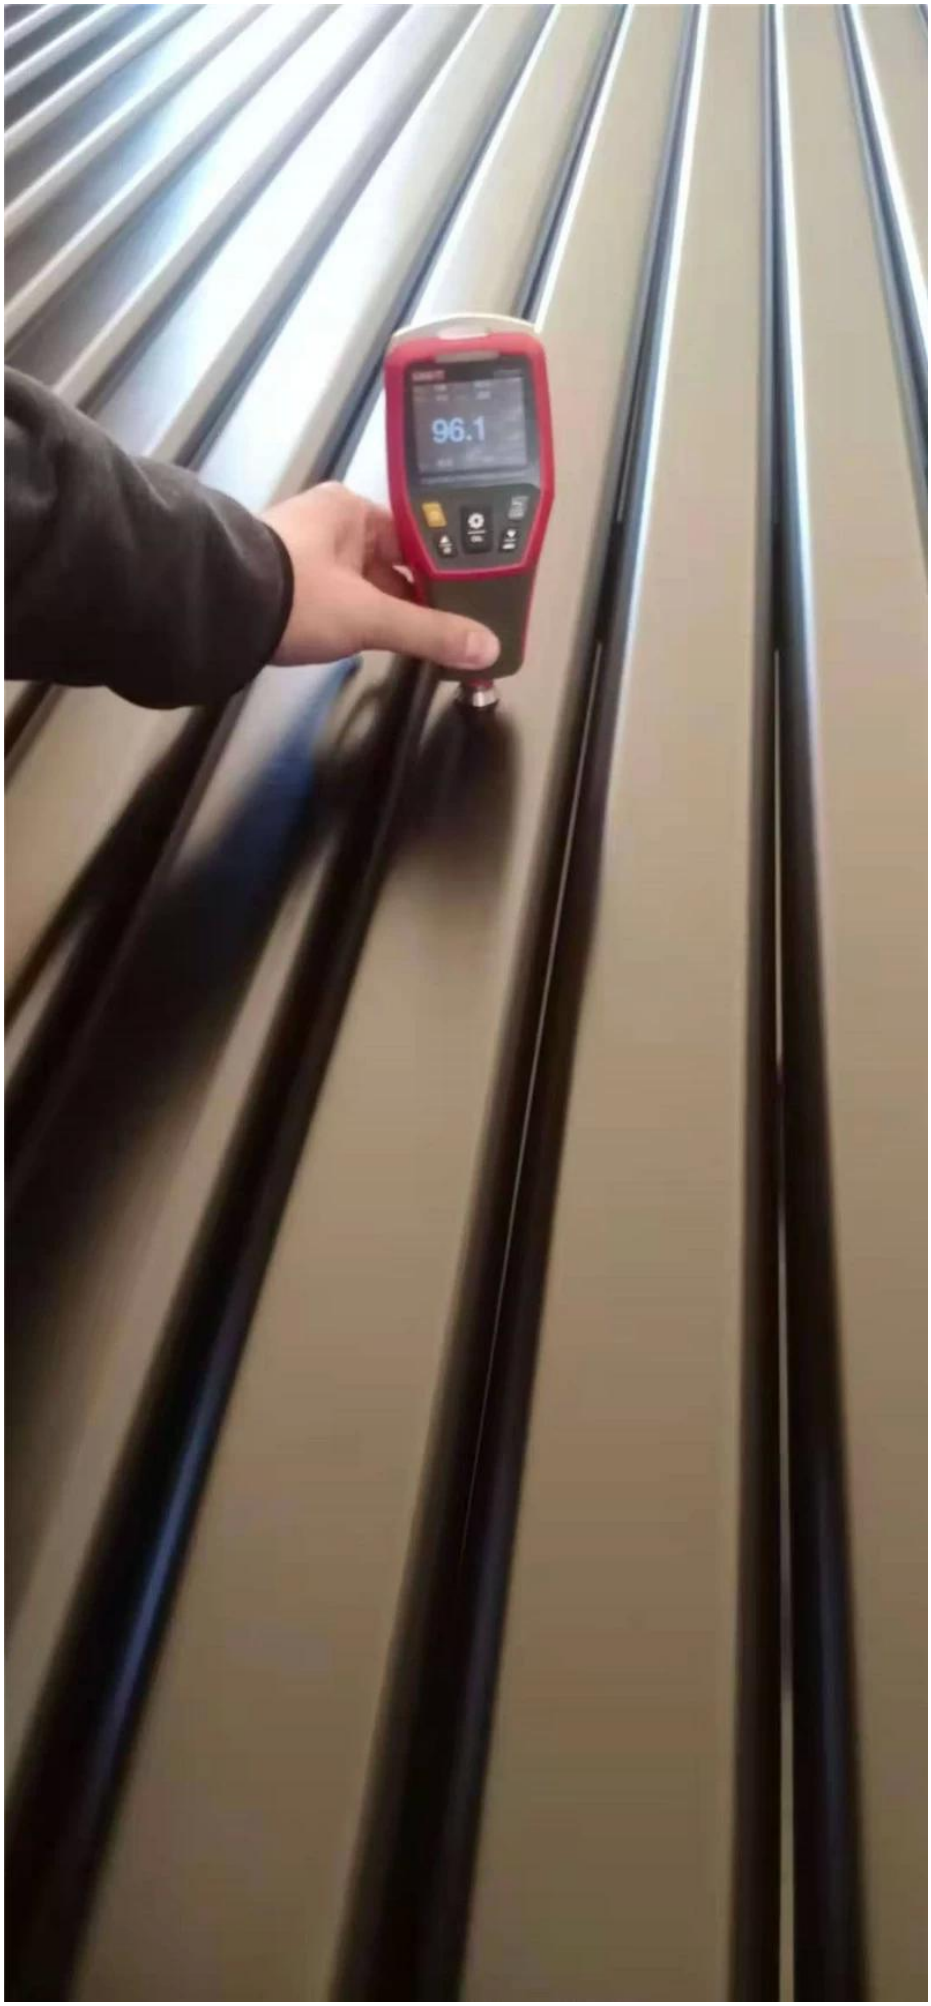
96.1

Per favoreTattogratuitoacontattonoiperDi piùparticolari:

Contatto:vigilia

E-mail:sales03@launch-china.cn.

HP / Whatsapp:+8613686807796.