

Specificaties

Productnaam	Aluminium legering schuiframen dubbele geglazuurde gehard glazen ramen
Materiaal	Aluminium legering 6063-T5 Profiel glas accessoires
Profielopties	Profielmerk: Chinees merk
	Profiel dikte: 2,0 mm
	Oppervlaktebehandeling: poedercoating, anodiseren, PVDF -coating, enz.
	Kleur: wit, zwart, grijs, aangepaste kleur
Glasopties	Standaardspecificatie: 5 mm27a5mm
	Materiaal: gehard glas
	Kleur: ultrahelder, helder, mat, grijs, groen, aangepaste kleur
	Soorten: enkel glas, gelamineerd glas, enz.
Andere accessoires	Afdichtingsstrook: EPDM Materail
	Lock: Chinees topmerk
	Track: roestvrijstalen rail
	Roller: hoogwaardig polyamide






Window types



C1

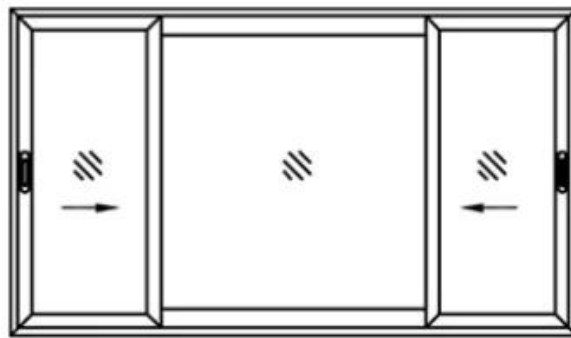

C2




C3



C4



C5

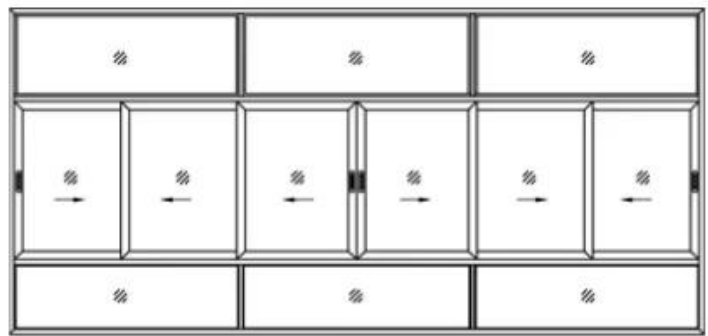


C6

Glass Types

Variety Of Glass & Profile Available



Temperde glass

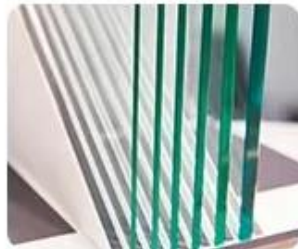


Single glass



Double glass



Triple glass

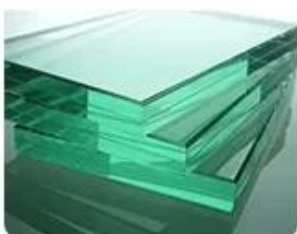

Laminated glass



Frosted glass




Low-E glass




Reflective glass



Single panel glass

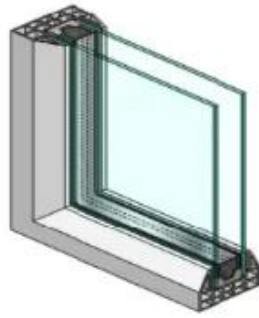

Double panel glass

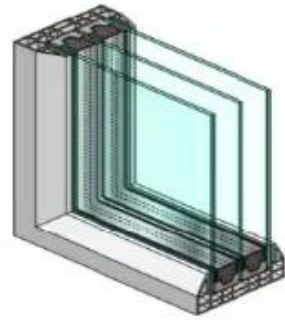


Triple panel glass



Safety hardware

- Automatic lock and child lock configuration to enhance safety performance

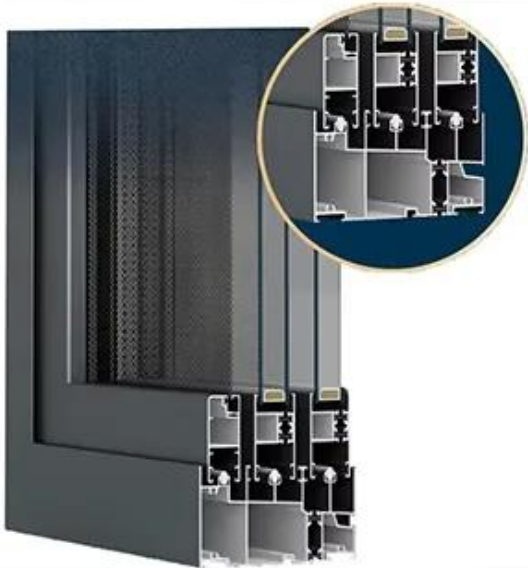

Safety and anti-derailment

- Wind resistance
- Sound insulation
- Thermal insulation

Double-blocked hidden drainage


- Water tightness
- Air tightness



Applications



Kitchen

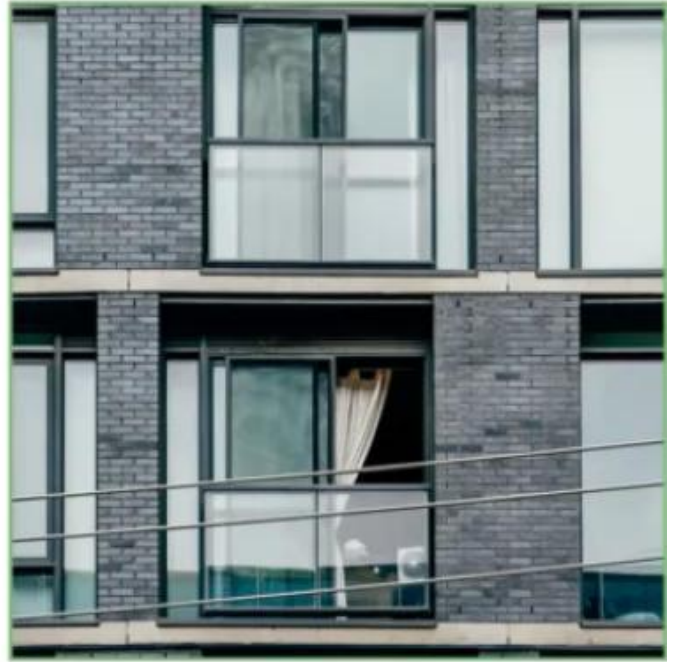

Home



Doorway



Living room



Bedroom



Hostel

Workshop



1.3D&CAD drawing



2.Thermal break



3.Cutting profile



4.Lock milling



5.Profile assembling



6.Glass assenbling



7.Sealing



8.Testing



9.quarantine