


Balkon stalen railing ontwerpen buitenkant reling tuin dek zwart metalen patio post metalen mesh railing

productnaam	Metalen dekrailing	Normale maat	H 1,1 M * W 1,2 m
Beperk hoog	2 m	Dikke dikte	1,2-2,5 mm
Batch starten	20 m of 20□	Plaats van product	Guangdong Province, China
Materiaal	Staal	Eenheidsprijsberekeningsmethode	Hoogte onder 1,2 m in meters, hoogte boven 1,2 m in vierkant
Ambacht	geassembleerd en gelast	Oppervlakte behandeling	Gepoedercoat



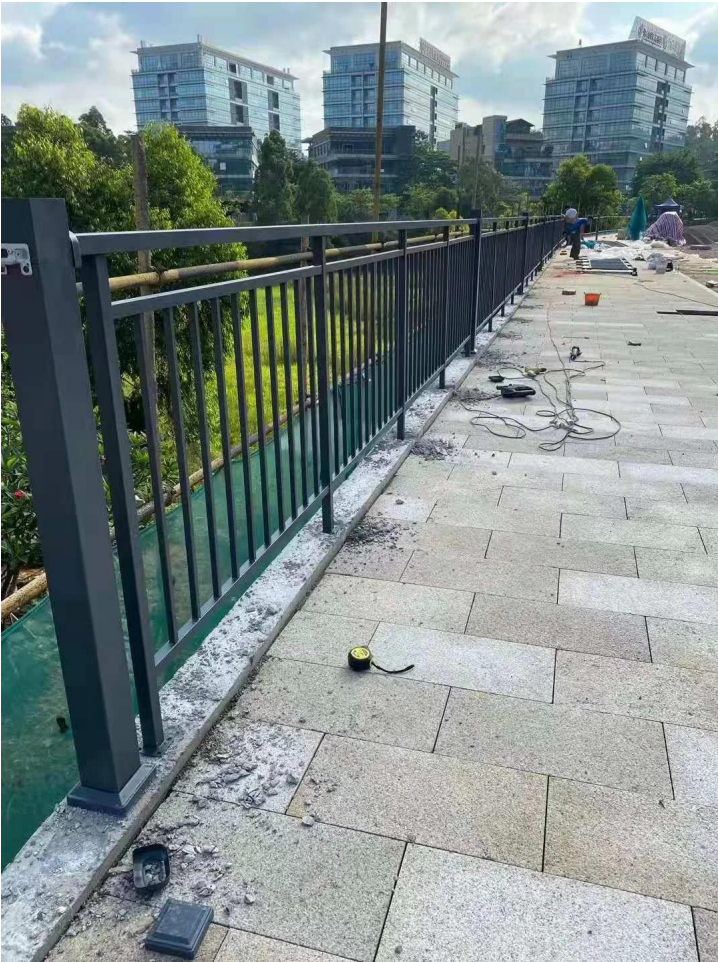

Bijeenkomst:














Installatiegidsen:

Guard Rail Assembly Instructions

Tools Required: Electrical Power Drill
(Impact Drill Preferred)

Overview: Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.



² Double check posts are parallel and tight against inside rail before marking holes for drilling.

¹ Inside rail will be loose until each post is secured to the ground.


³ Push and pull top rail & inside rail to ensure all is secure.

Productie&verpakkingvantrappenhuisstaalleuningenvanBijzondereWorkshop:



KEBIL®

SHENZHEN LAUNCH CO., LTD

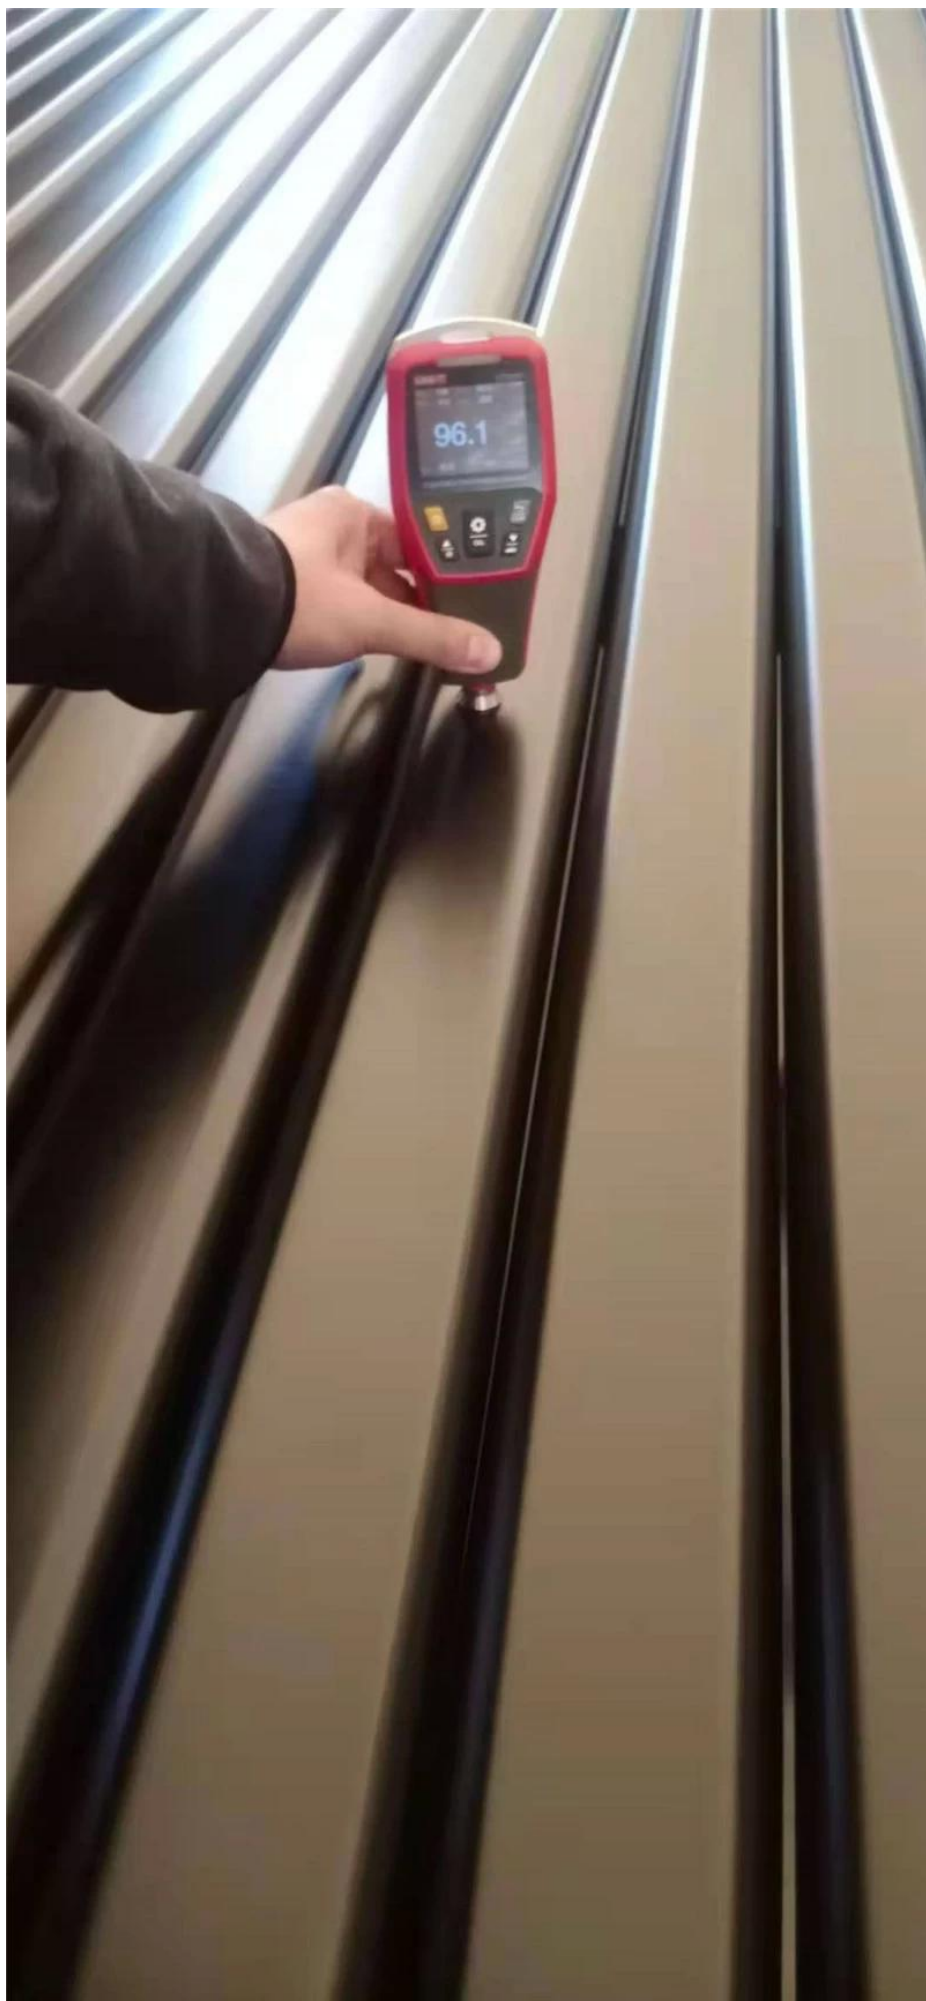





AlstublieftvoelenvrijnaarcontactonsvoormeerDetails:

Contact:Vooravond

E-mail:sales03@launch-china.cn

HP / WhatsApp:+8613686807796