

China vervaardigen roestvrijstalen glazen railing ontwerpen




1	Materiaal en afwerking	304/316 roestvrij staal; Satijnen afwerking of spiegel
2.	Hoogte	1000 mm / aangepaste maten
3	Stucheon Post	D50.8 * 1,5 (mm) buis; 4-weg verstelbare bovenste spoorwegbeugel; Vierkante of ronde glazen klem.
4	Bovenste rail.	D50.8 * 1,5 (mm) kabelbuis
5	Veiligheidsleuning	10 mm / 12 mm transparant gehard glazen paneel
6	Je ziet Positie	Balauster, balustrade, leuning, hek, leuning, leuningen; Balkon, brug, brug, tuin, patio, zwembad, veranda, trap, terras
7	Installatie	Top / Side gemonteerd
8	Pakket	EPE + Binnenvak + karton

ProductShow




TechnischTekening





LCH-106

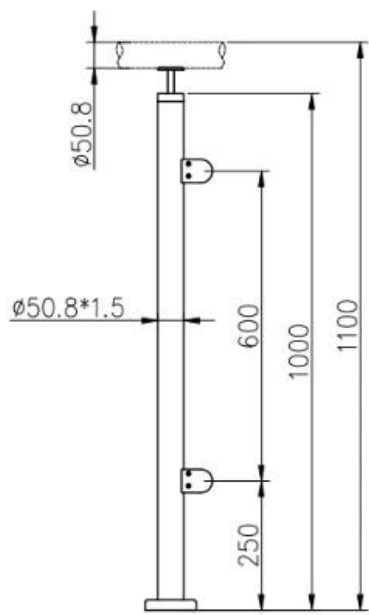

LCH-107

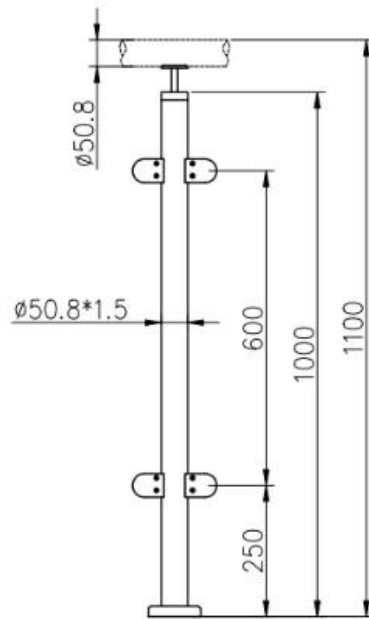


LCH-108

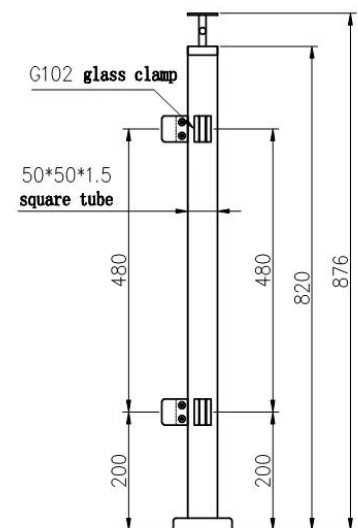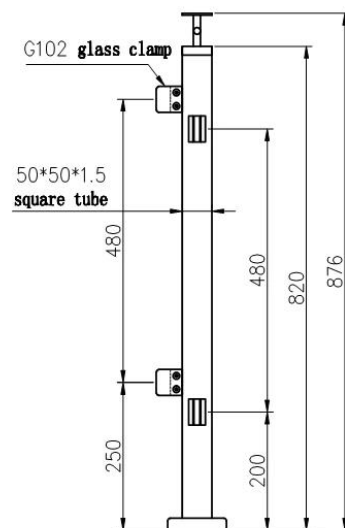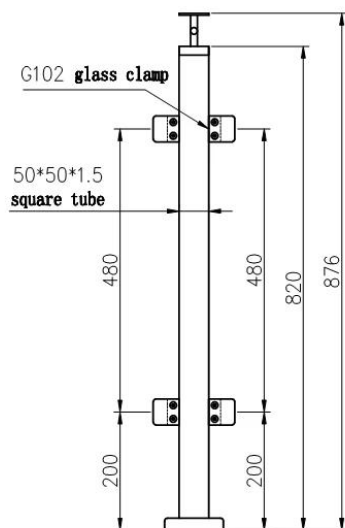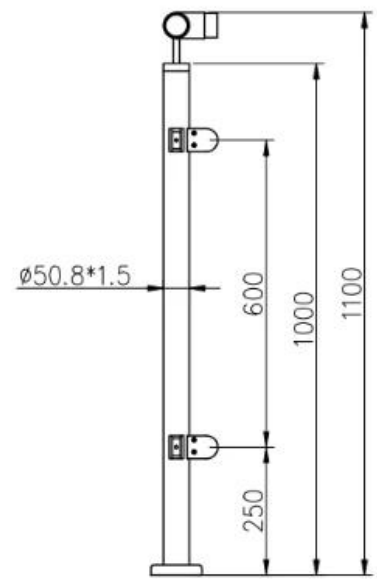

Installatie:


Glass Clamp Installation Guide

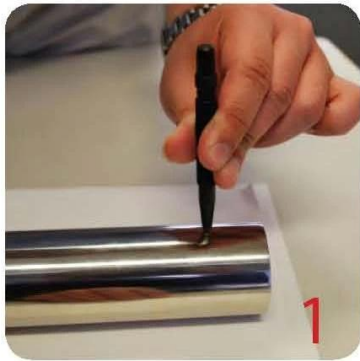

Mark and centre punch desired location of blind rivet nut location.



Drill centre punched hole in tube to suit blind rivet nut.

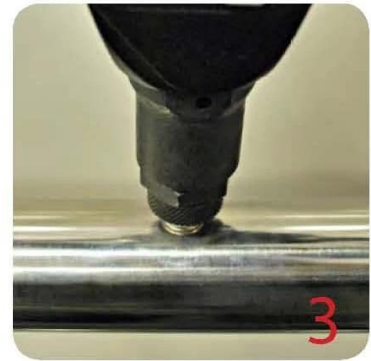

Insert blind rivet nut into tube and fasten with blind rivet tool.



Check installed blind rivet nut is secure and ready for install.



Align half glass clamp with blind rivet nut inline position. Screw in button head cap screw into thread and tighten with hex key.



Select appropriate rubber gasket to suit glass panel thickness. Install rubber gasket into both sides of glass clamp. (Note rubber gasket marked with sizes).



If heavier clamping load is required please use supplied glass clamp pin, during the install process. Note glass panels will require drilling in order to fit glass clamp pins.



Fit glass panel into position, install second half of glass clamp secure with provided hex screws.




Tighten glass clamps with hex key, and check glass panel are secure with no movement.

Projectshow:

China vervaardigen roestvrijstalen glazen railing ontwerpen



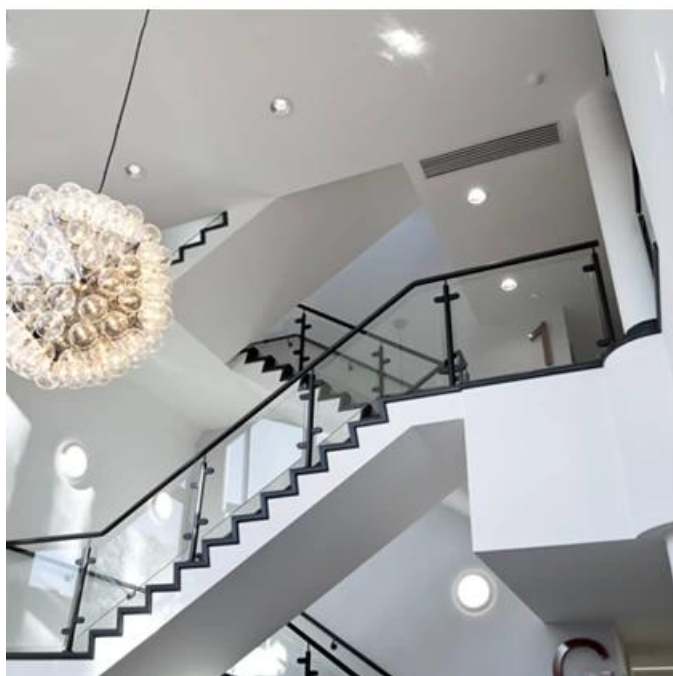

Welkom bijNeem contact met mij op voor meer details:
Wendy: sales04@launch-china.cn.
HP / WhatsApp / Wechat: +8615989339827