



## Hot-Dip Gegalvaniseerd Smeedijzeren Balkon Veiligheid Omheining Beveiliging Stalen Railing Balkon Balustrade

productnaam	Gegalvaniseerde stalen reling	Normale maat	H 1,1 M * W 1,2 m
Beperk hoog	2 m	Dikke dikte	1,2-2,5 mm
Batch starten	20 m of 20□	Plaats van product	Guangdong Province, China
Materiaal	Staal	Eenheidsprijsberekeningsmethode	Hoogte onder 1,2 m in meters, hoogte boven 1,2 m in vierkant
Ambacht	geassembleerd en gelast	Oppervlakte behandeling	Gepoedercoat



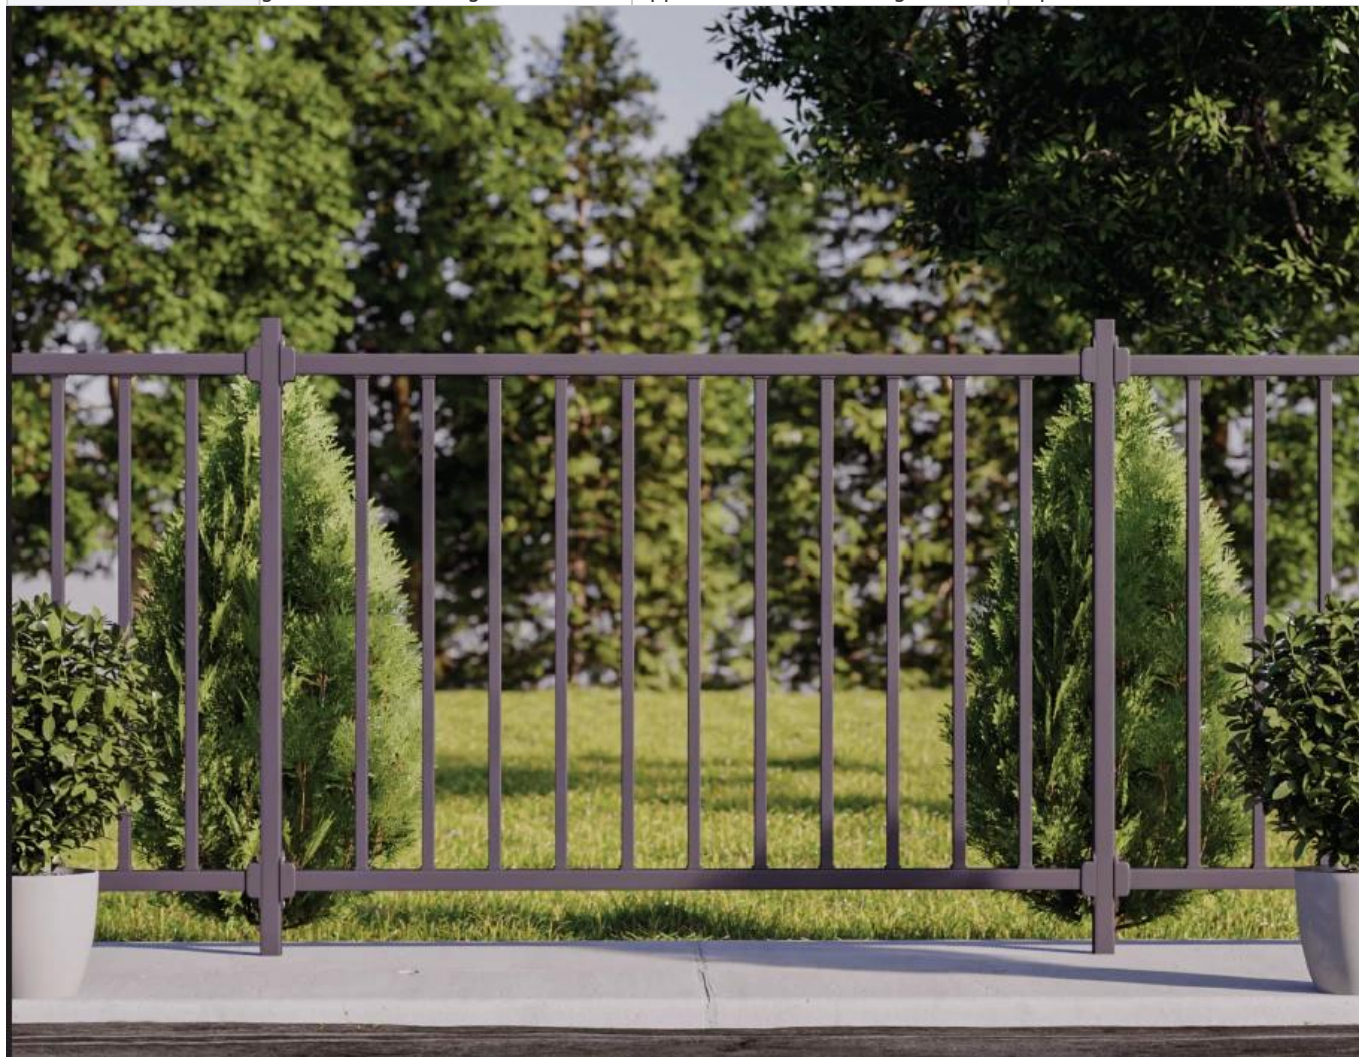

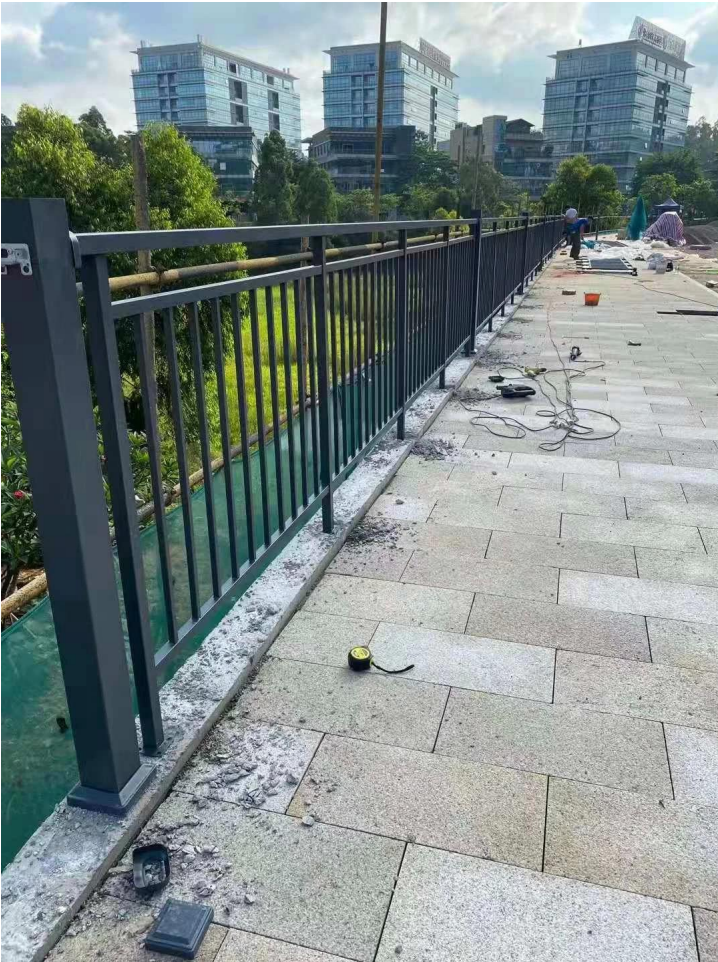

**Samenkomst:**













**Installatiegidsen:**

# Guard Rail Assembly Instructions

**Tools Required:** Electrical Power Drill  
(Impact Drill Preferred)

**Overview:** Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.

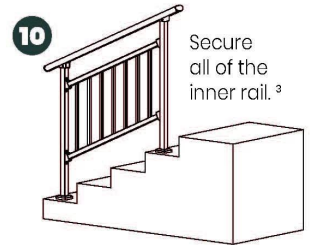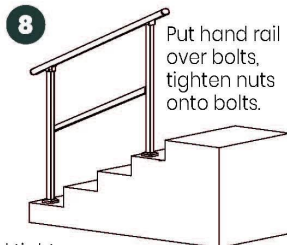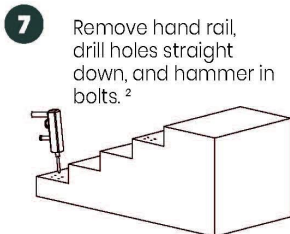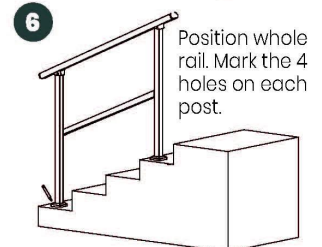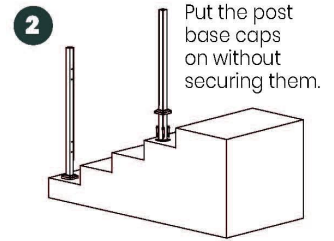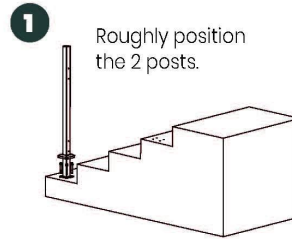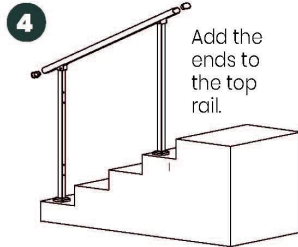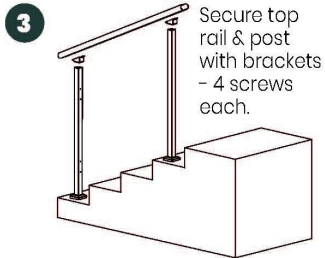


<sup>2</sup> Double check posts are parallel and tight against inside rail before marking holes for drilling.

<sup>1</sup> Inside rail will be loose until each post is secured to the ground.

<sup>3</sup> Push and pull top rail & inside rail to ensure all is secure.

**Productie&verpakkingvantrappenhuisstaalleuningenvanBijonsWorkshop:**



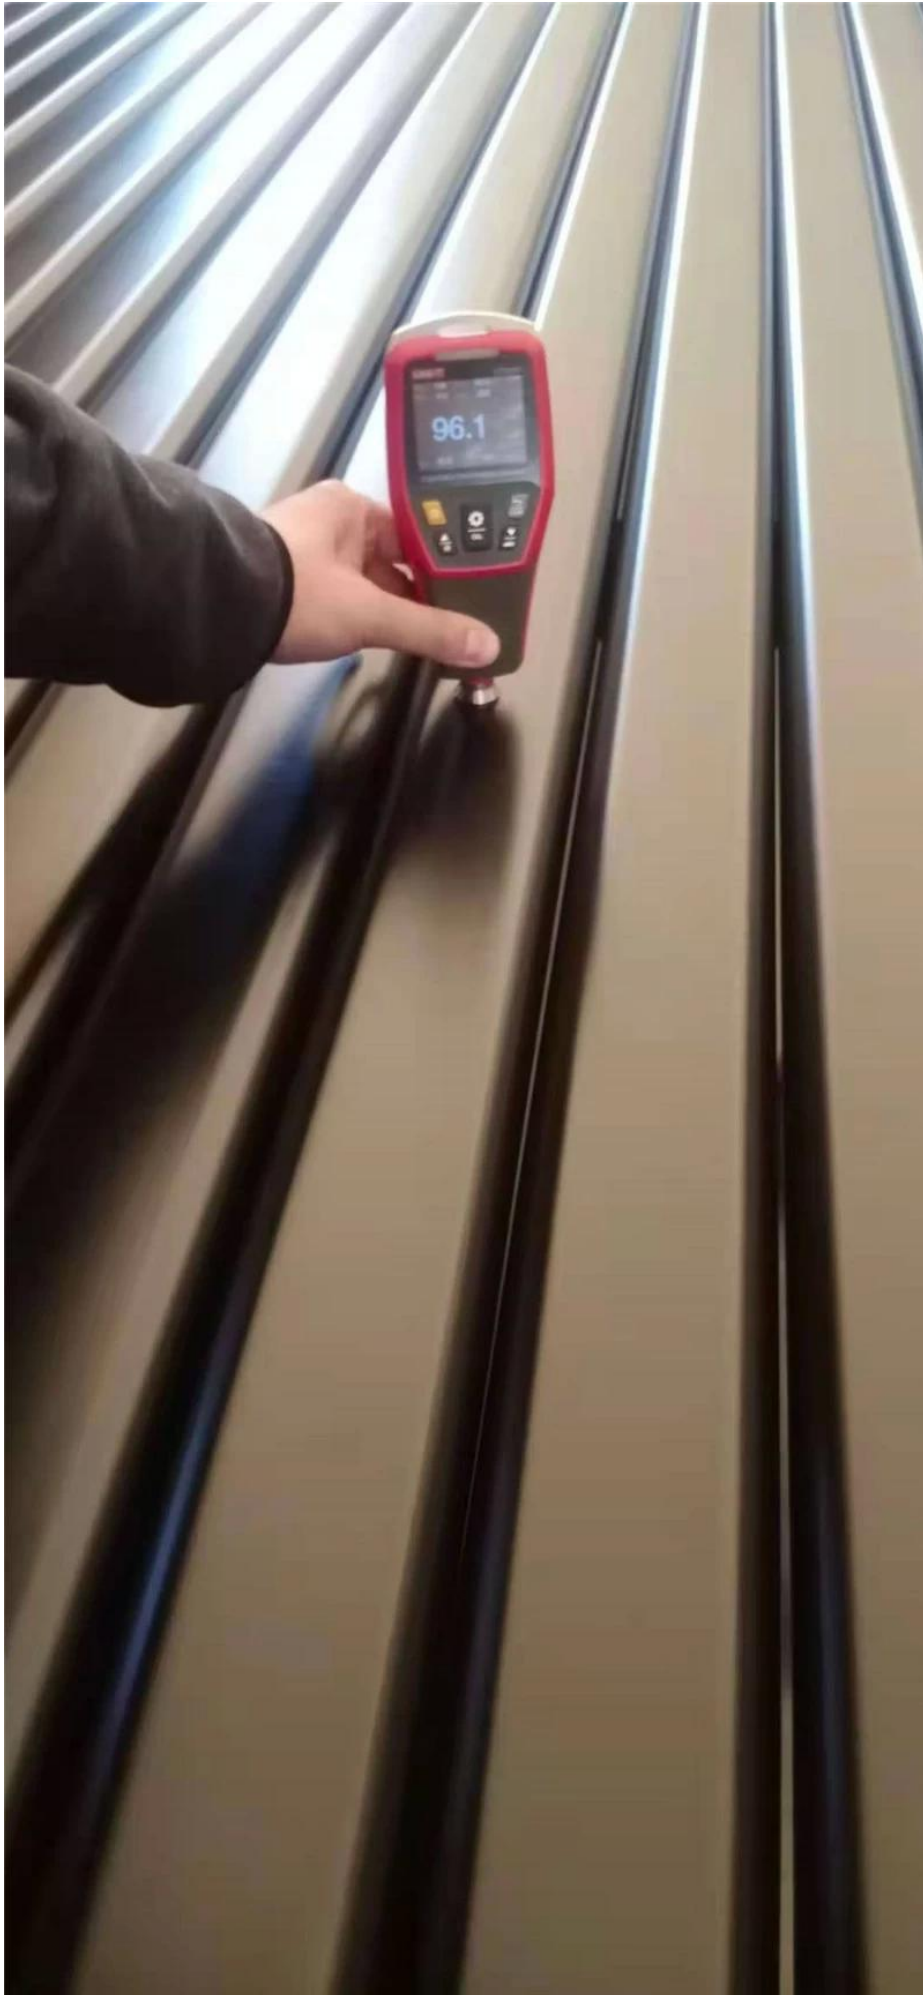







**Alsjeblieftgevoelvrijtotcontactonsvoormeerdetails:**

**Contact:Vooravond**

**E-mail:sales03@launch-china.cn**

**HP / WhatsApp:+8613686807796**