


RVS reling groothandel RVS trapeleuning glazen reling systeem




1	Materiaal en afwerking	Roestvrij staal 304/316; Afwerking in satijn of spiegel
2	Hoogte	1000 mm / aangepast formaat
3	Staander Post	D50.8 * 1.5 (mm) buis; 4-voudig verstelbare bovenrailbeugel; Vierkante of ronde glasklem.
4	Bovenste rail	D50.8 * 1.5 (mm) holle buis
5	Beveiliging reling	10 mm / 12 mm gehard helder glazen paneel
6	Gebruik & Plaats	Baluster, Balustrade, Leuning, Omheining, Leuning, Leuningen; Balkon, Brug, Dek, Tuin, Patio, Zwembad, Veranda, Trap, Terras
7	Installatie	Boven- / zijkant gemonteerd
8	Pakket	EPE + binnendoos + doos




LCH-106

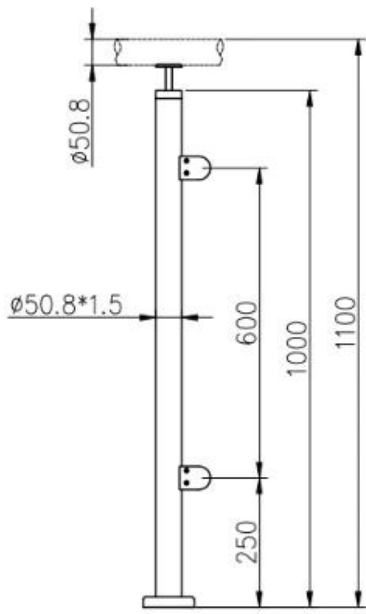

LCH-107

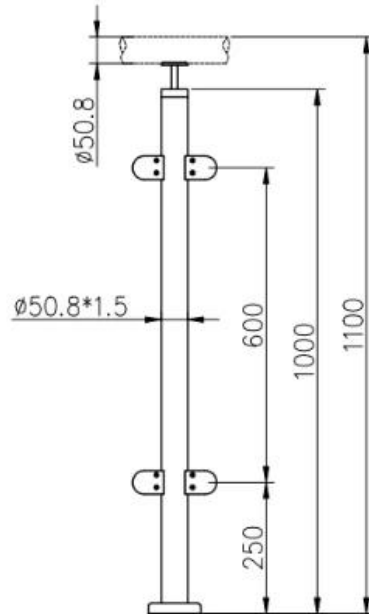

LCH-108

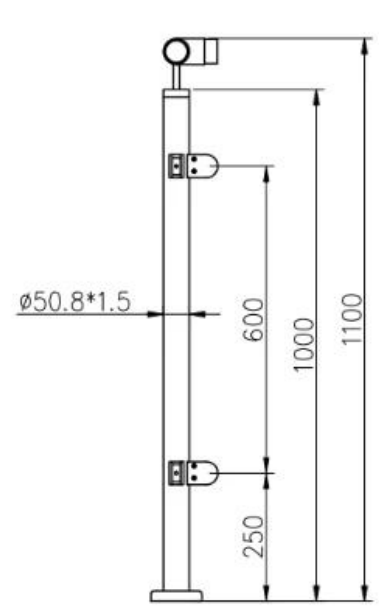

Installatie:

Glass Clamp Installation Guide



Mark and centre punch desired location of blind rivet nut location.



Drill centre punched hole in tube to suit blind rivet nut.



Insert blind rivet nut into tube and fasten with blind rivet tool.



Check installed blind rivet nut is secure and ready for install.



Align half glass clamp with blind rivet nut inline position. Screw in button head cap screw into thread and tighten with hex key.



Select appropriate rubber gasket to suit glass panel thickness. Install rubber gasket into both sides of glass clamp. (Note rubber gasket marked with sizes).



If heavier clamping load is required please use supplied glass clamp pin, during the install process. Note glass panels will require drilling in order to fit glass clamp pins.



Fit glass panel into position, install second half of glass clamp secure with provided hex screws.



Tighten glass clamps with hex key, and check glass panel are secure with no movement.



Project show

RVS reling groothandel RVS trapeleuning glazen reling systeem





Voor balkon traliewerk ontwerpen:

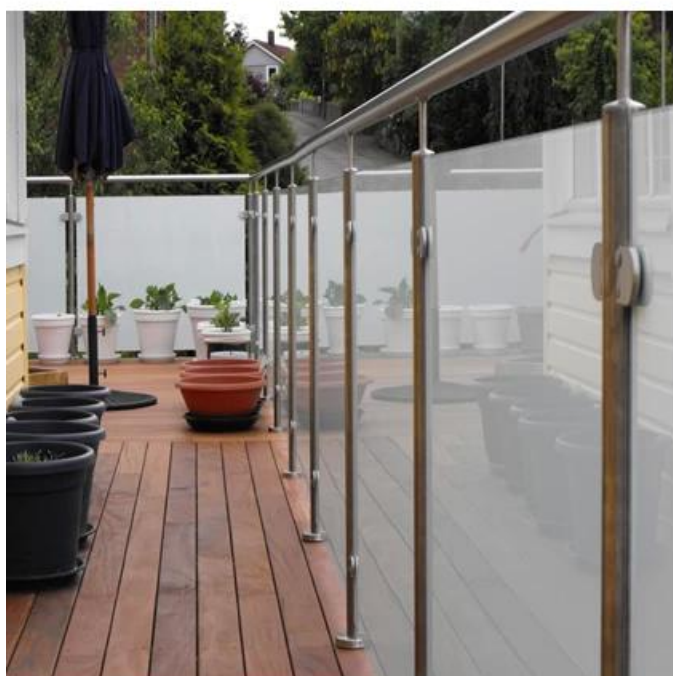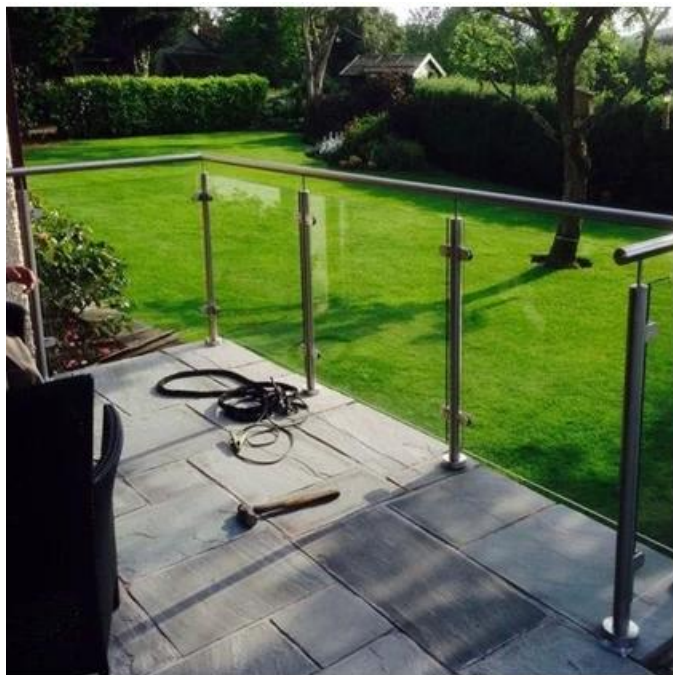

**Welkom bij contact ons:
Eve Chow
sales03@launch-china.cn
HP / WhatsApp / WeChat: +8613686807796**