

Productnaam	Handrails voor stappen buiten, zwarte ovale buitenafsteuning voor veranda, dek of binnen trap, relingpakket
Materiaal	Gegalvaniseerd staal
Kleur	Zwart
Capaciteit	5000 pc's per maand
Kenmerken	Sterk, stijlvol, duurzaam, corrosiebestendig
Vorm	Vierkant post 40*40 mm, sq leuning 50*25 mm
Sollicitatie	Tuin, zwembad, dek, terras, balkon, trap, etc.
Betaling	T/T, Western Union, Alibaba, PayPal, L/C, enz.
Materiële testrapport	Beschikbaar







EASY TO INSTALL

All necessary accessories are provided



Step 1: Assemble



Step 2: Mark



Step 3: Punch



Step 4: .Finish



WROUGHT IRON RAILING

Safety & Durable Outdoor Handrails

Durability: The handrail withstand years of use and exposure to the elements. The product won't rust, rot, or degrade quickly.

Safety: Sturdy handrail. Its reliability is crucial. No any risk of it coming loose over time.

Installation: Comes with all mounting hardware and clear instructions. You can do it yourself, just take 15 mins.



Everything You Need Are Included

a masonry drill bit

an extension drill bit

a hex nutsetter

a double ended wrench

an allen wrench

8 x extension bolts


8 x lag screws

8 x screws

8 x self-tapping screws

Modern & Versatile Cable Stair Railing

Suitable for Wood and Concrete Surfaces

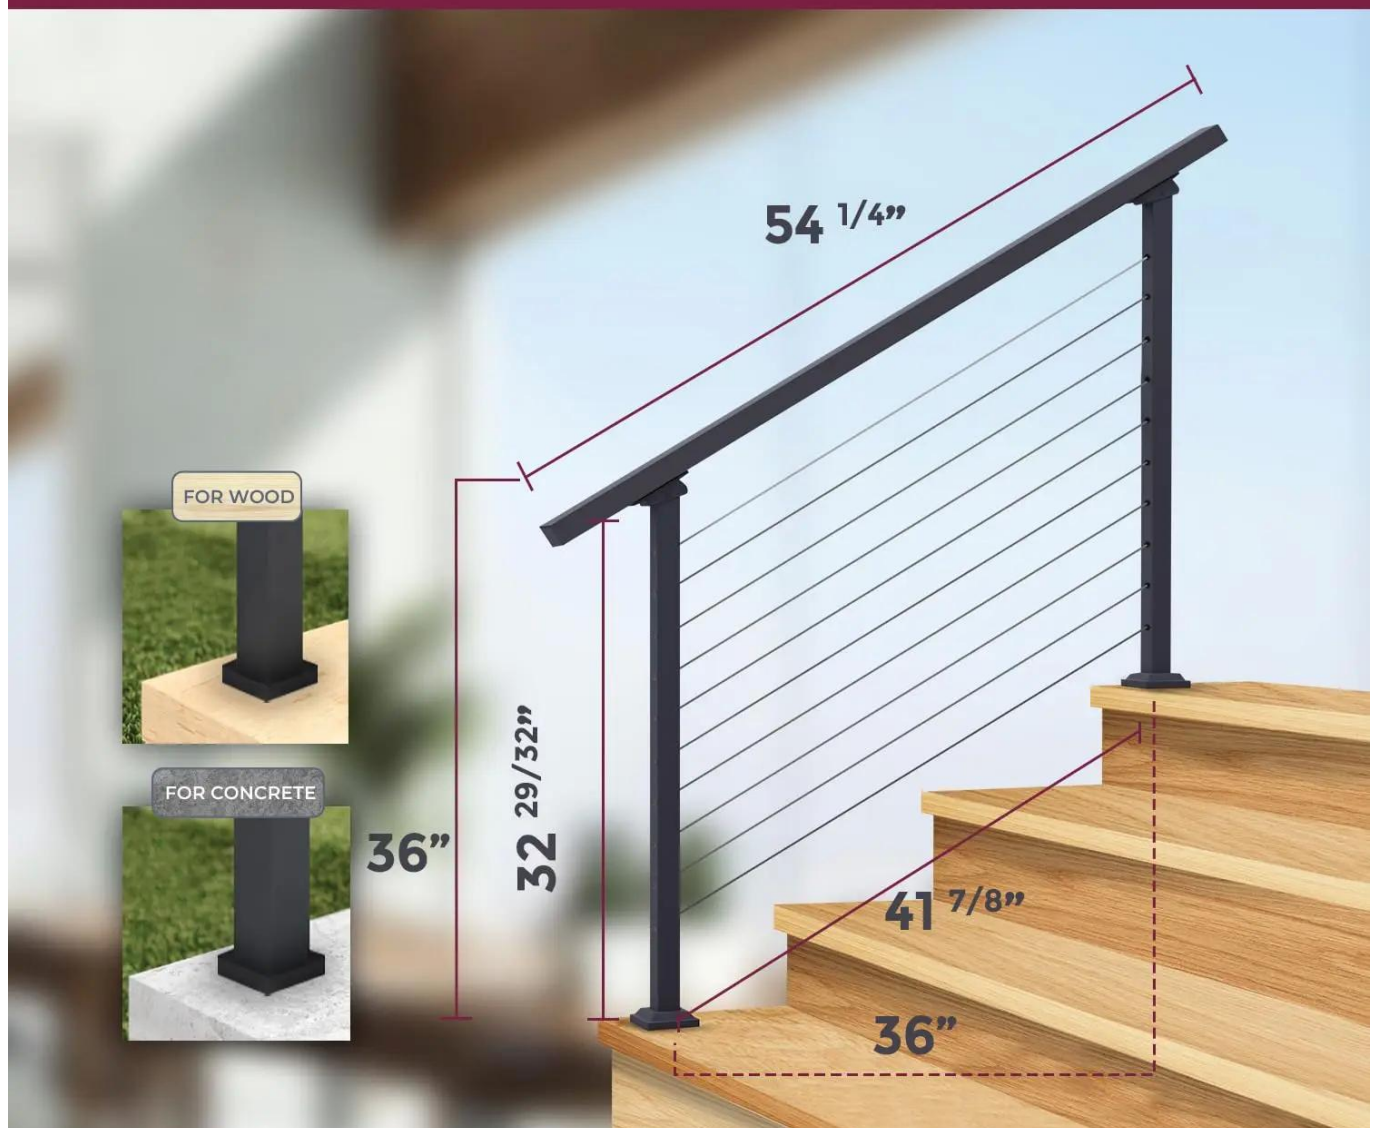



34 1/2"

Baseplate
3.15" X 2"

Kits Included



8 Self-Drilling Screws



1 Bubble level



8 Lag Crew (for wood)



**1 Hex Nut/
Bolt Drive**



8 Concrete Wedge Anchors (for concrete)



10 Flat Washers



1 Hex Bit



1 Masonry Drill Bit



1 Wood Pilot Hole Drill Bit



1 Drill Bit Extender



1 Depth Measuring Pencil



1 Ruler



2 Top Bracket



**40 Cable Hole
Protector Sleeve**




2 Post Cover

Sturdy and Space Saver Cable Railing System




STAIRS POST

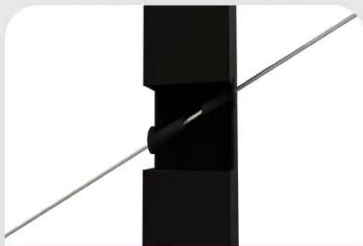


30 degrees angle

CORNER POST

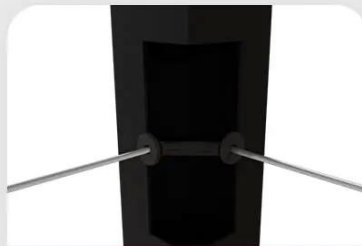

L-shaped hole


LINE POST

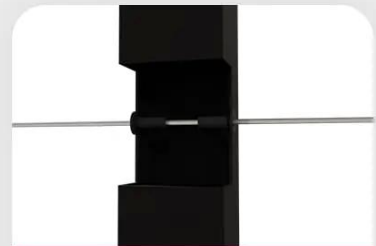

Straight hole

Buidling Code Compliant

For Residential and Commercial Buildings

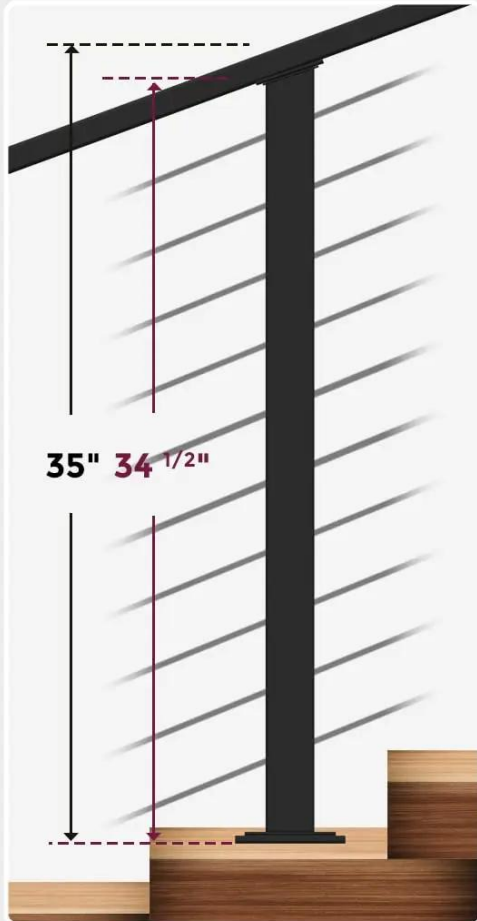

-  Rust Resistant
-  Weather Resistant
-  Corrosion Resistant
-  Waterproof Construction
-  Less Discoloration, Chalking, or Flaking

IBC 1014.2: Handrail height, measured above stair tread nosing's, or finish surface of ramp slope, shall be uniform, not less than 34" and not more than 38"

