



Ocynkowane żelazne poręcze zabytkowe balustrady balkonowe powlekane w proszku

Nazwa produktu	Ocynkowana stalowa poręcz	Standardowy rozmiar	H 1,1 m*w 1,2 m
Ogranicz wysokie	2 m	Grubość rurki	1,2-2,5 mm
Początkowa partia	20 m lub 20□	Miejsce produktu	Prowincja Guangdong, Chiny
Materiał	Stal	Metoda obliczania cen jednostkowych	Wysokość poniżej 1,2 m w metrach, wysokość powyżej 1,2 m na kwadrat
Rękodzieło	zmontowane i przyspawane	Obróbka powierzchniowa	Malowana proszkowo



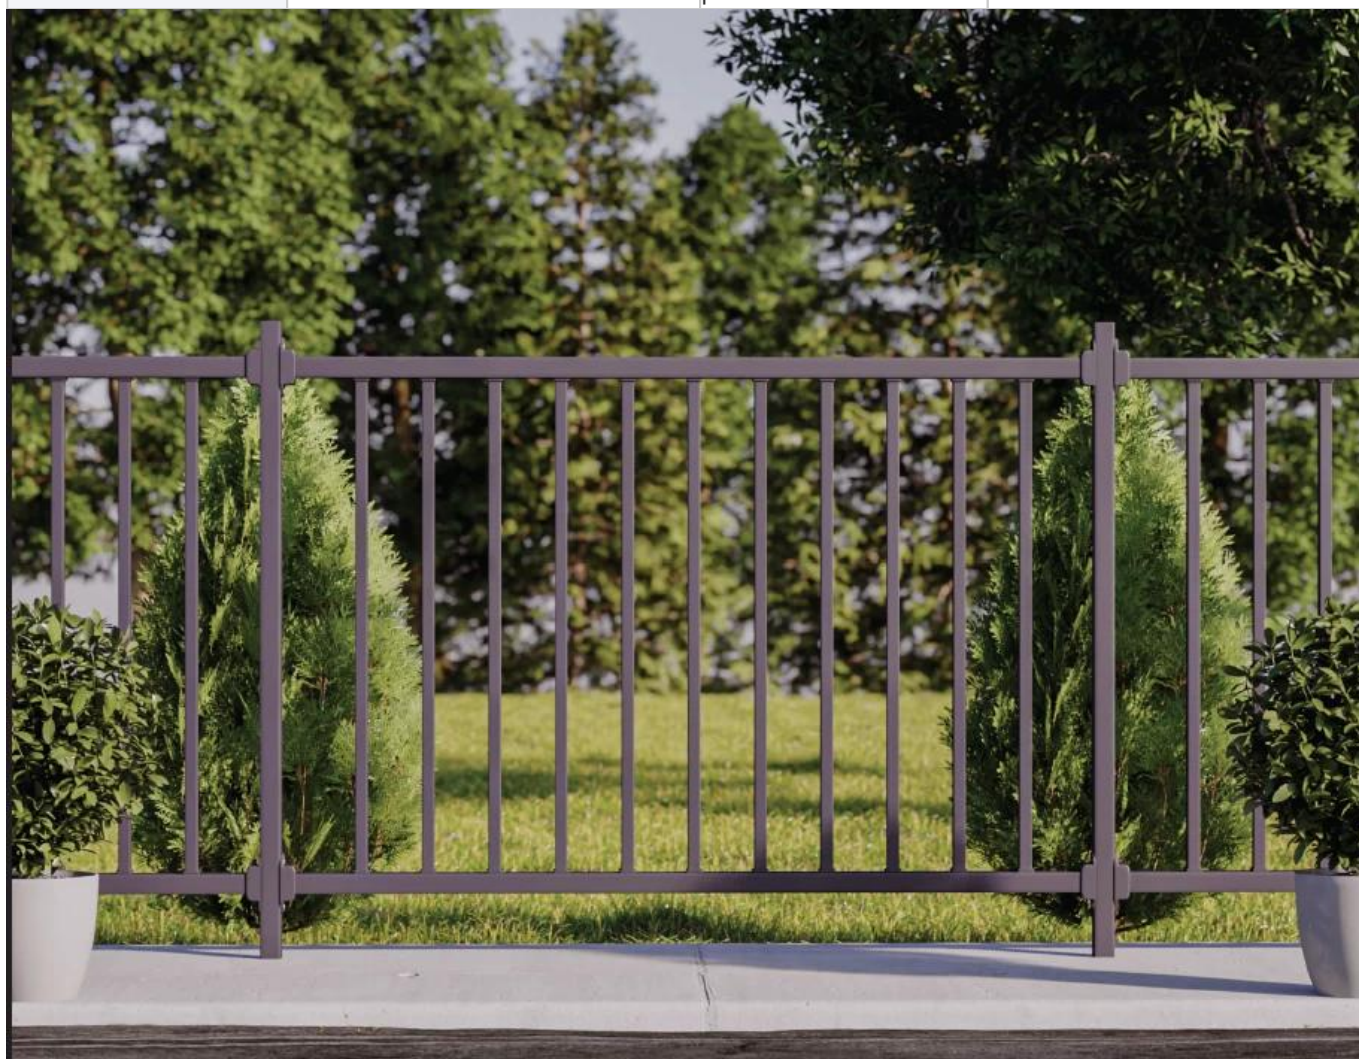

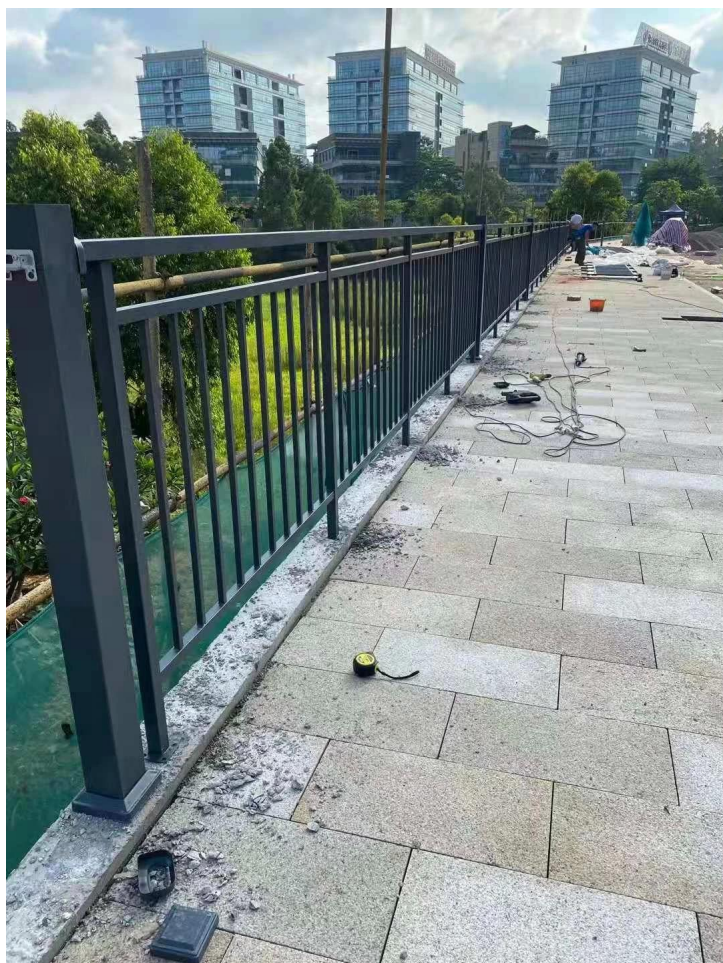

Montaż:














Przewodniki instalacyjne:

Guard Rail Assembly Instructions

Tools Required: Electrical Power Drill
(Impact Drill Preferred)

Overview: Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.

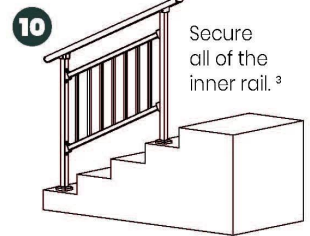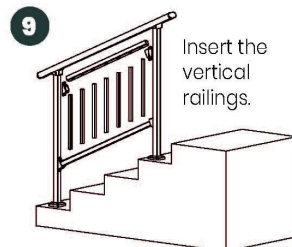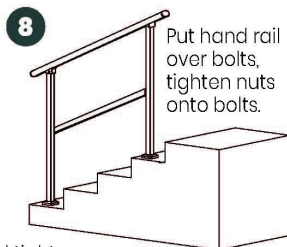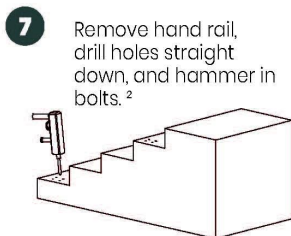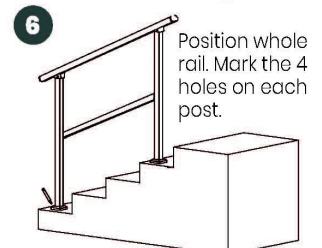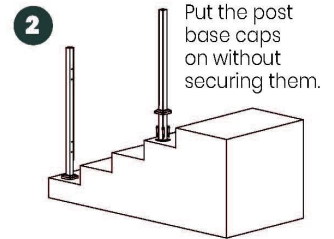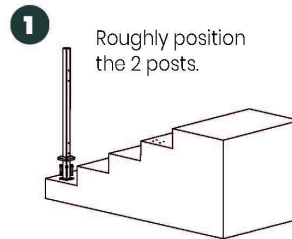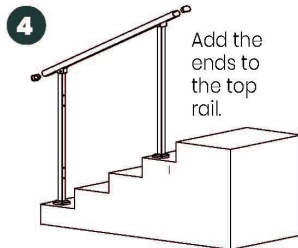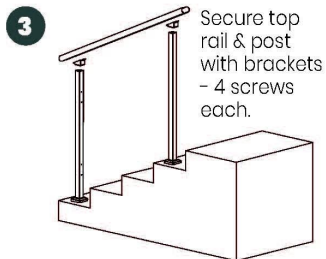


² Double check posts are parallel and tight against inside rail before marking holes for drilling.

¹ Inside rail will be loose until each post is secured to the ground.

³ Push and pull top rail & inside rail to ensure all is secure.

Produkcja i pakowanie z klatka schodowa stal poręczewna szwarsztat:



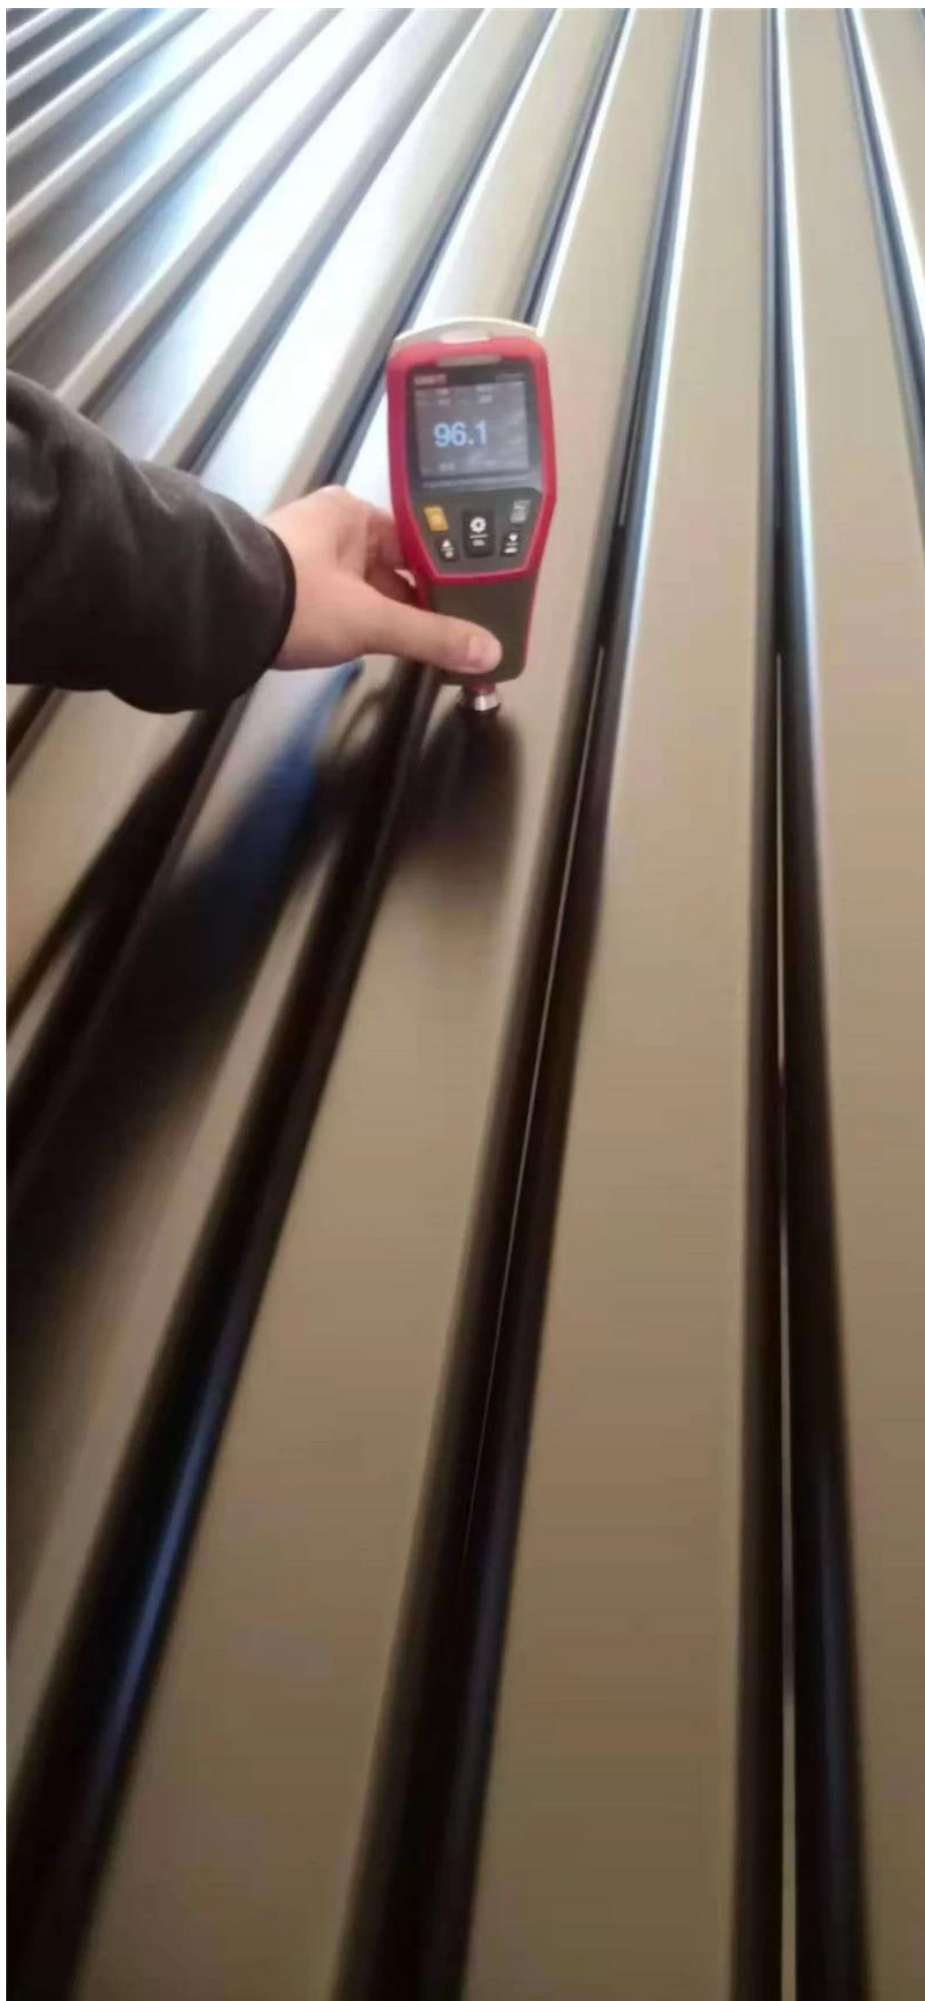





Proszę zobaczyć w kontaktnas dla jeszcze Detale:

Kontakt: Przeddzień

E-mail:sales03@launch-china.cn

HP/WhatsApp:+8613686807796