



## Ogólnoksiężstwo ocynkowane Kute Balkon Bezpieczeństwo Bezpieczeństwo Balustrada Balustrada Balustrada

Nazwa produktu	Ocynkowana poręcz stalowy	Standardowy rozmiar	H 11 m * w 1,2 m
Limitować wysokość	2 m.	Grubość rury	1,2-2,5 mm.
Rozpoczęcie partii	20 m lub 20□	Miejsce produktu	Prowincja Guangdong, Chiny
Materiał	Stal	Metoda obliczania cen jednostek	Wysokość poniżej 1,2 m w metrach, wysokość powyżej 1,2 m na placu
Rękodzieło	zmontowany i spawany	Obróbka powierzchniowa	Malowana proszkowo



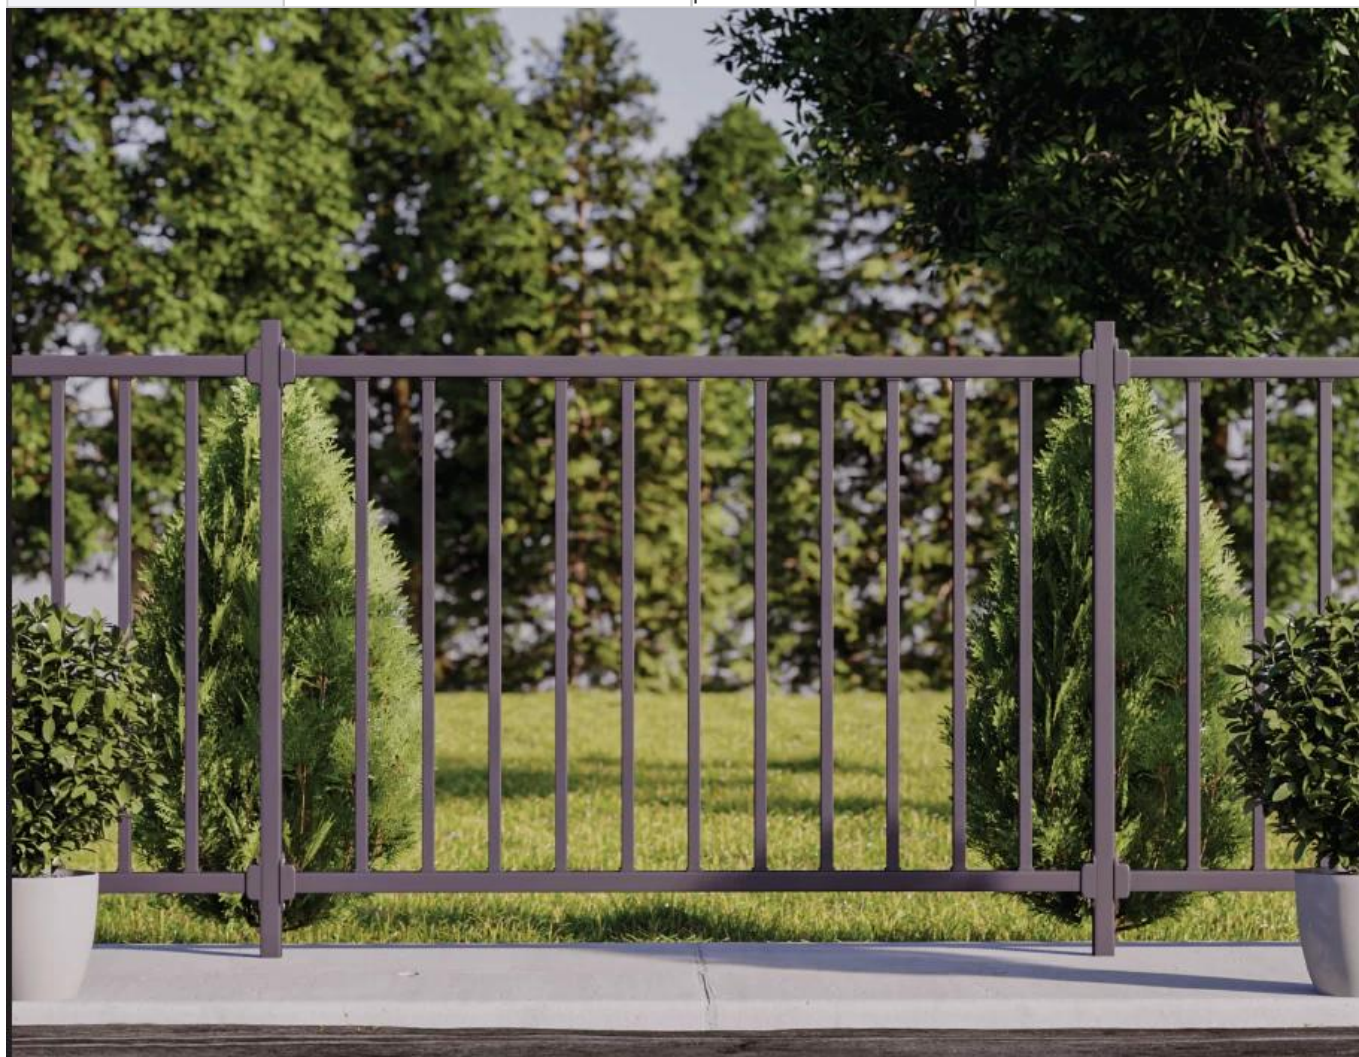

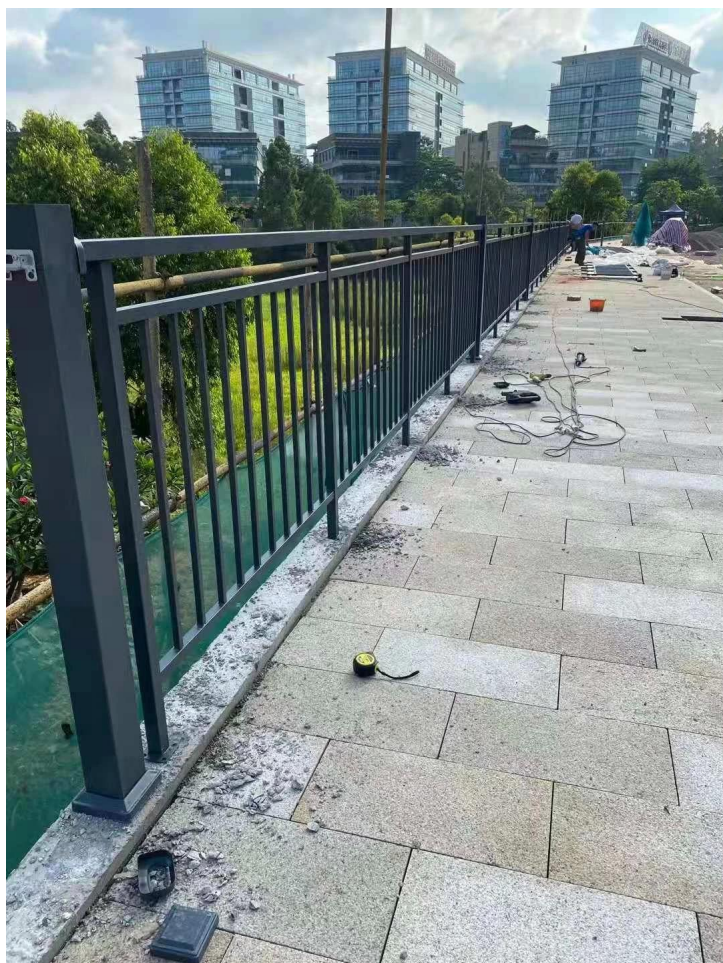

**Montaż:**














**Przewodniki instalacji:**

# Guard Rail Assembly Instructions

**Tools Required:** Electrical Power Drill  
(Impact Drill Preferred)

**Overview:** Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.

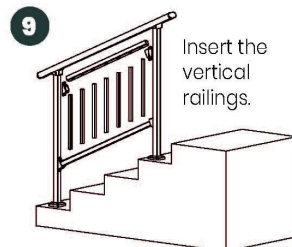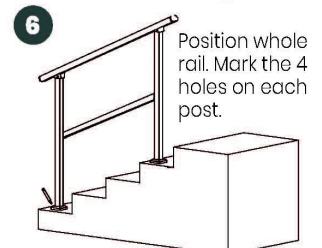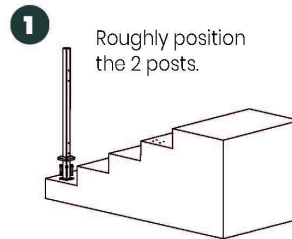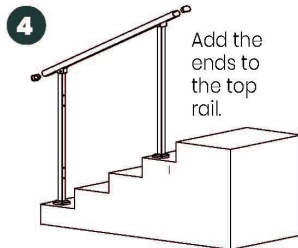


<sup>2</sup> Double check posts are parallel and tight against inside rail before marking holes for drilling.

<sup>1</sup> Inside rail will be loose until each post is secured to the ground.

<sup>3</sup> Push and pull top rail & inside rail to ensure all is secure.

**Produkcja i opakowanie z klatka schodowa stal poręczewna szwarsztat:**



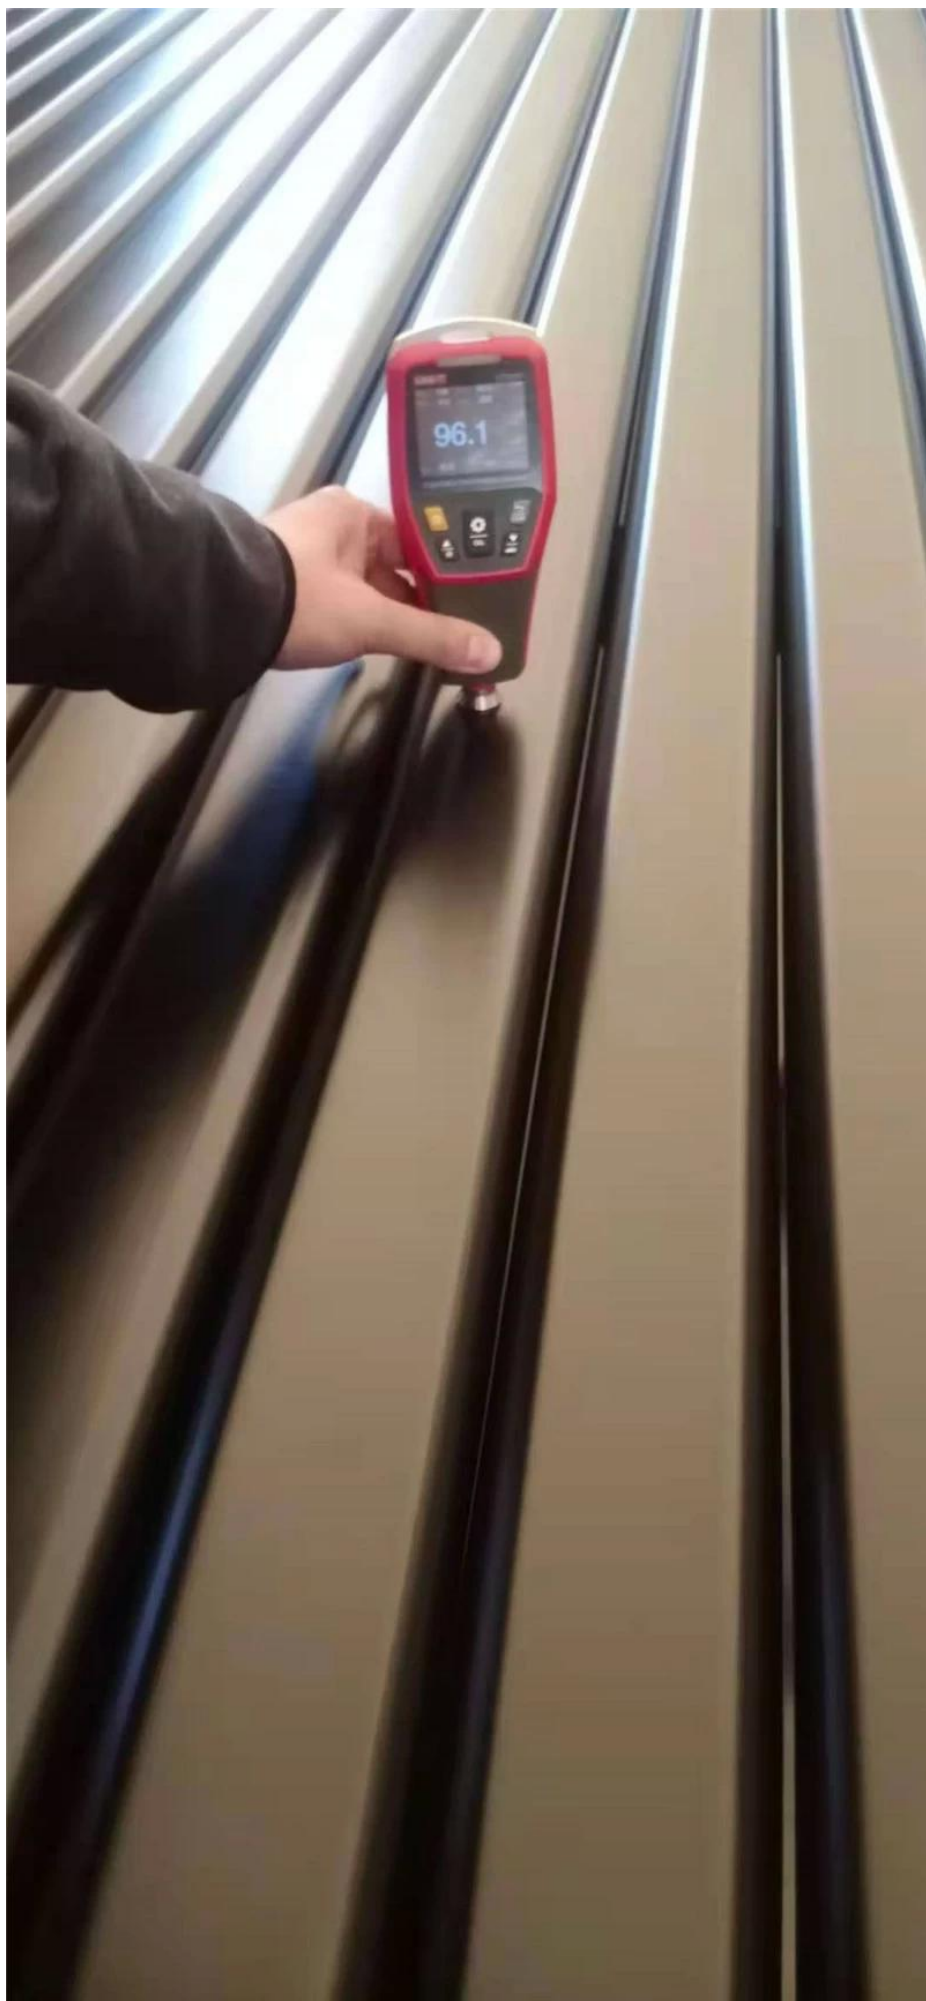







**Proszę o darmowy kontakt na dla jeszcze Detale:**

**Kontakt: przeddzień**

**E-mail:sales03@launch-china.cn.**

**HP / Whatsapp:+8613686807796.**