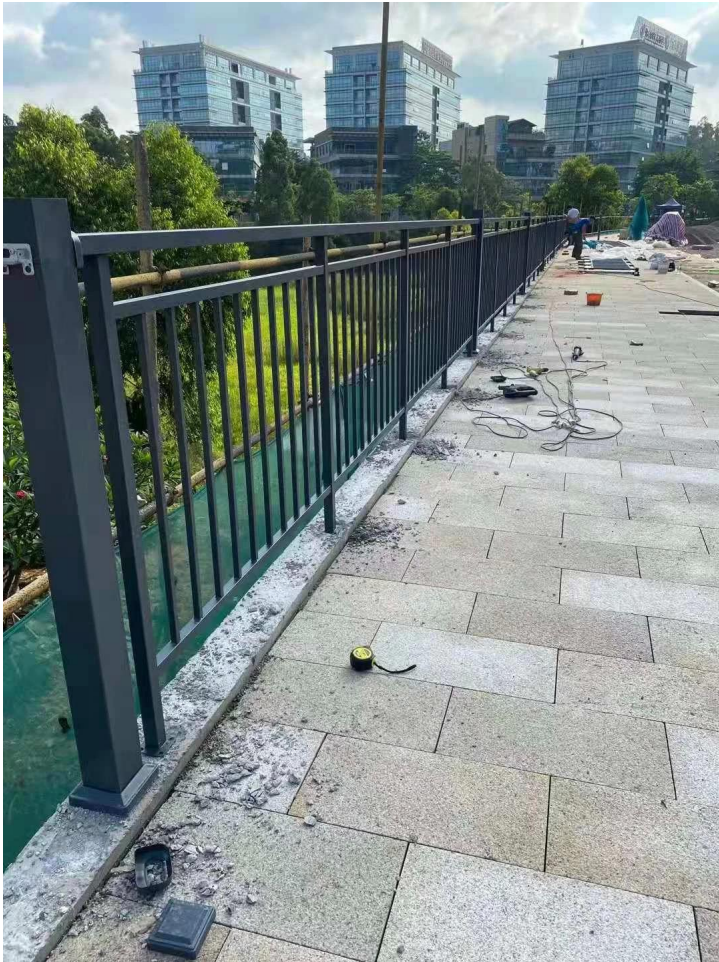


**Balcony Steel Railing Designs Exterior Railing Garden Deck Black Metal
Patio Post Metal Mesh Railing**

Product Name	Metal Deck Railing	Regular size	H 1.1 M*W 1.2 M
Limit high	2 M	Tube thickness	1.2-2.5 mm
Starting batch	20 m or 20□	Place of Product	Guangdong Province,China
Material	Steel	Unit price calculation method	Height below 1.2 m in meters, Height above 1.2 m in square
Craft	assembled and welded	Surface treatment	Powder coated





Assembly:















Installation guides:

Guard Rail Assembly Instructions

Tools Required: Electrical Power Drill
(Impact Drill Preferred)

Overview: Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.

- 1** Roughly position the 2 posts.
- 2** Put the post base caps on without securing them.
- 3** Secure top rail & post with brackets - 4 screws each.
- 4** Add the ends to the top rail.
- 5** Secure inside rail with brackets - 2 screws each.¹
- 6** Position whole rail. Mark the 4 holes on each post.
- 7** Remove hand rail, drill holes straight down, and hammer in bolts.²
- 8** Put hand rail over bolts, tighten nuts onto bolts.
- 9** Insert the vertical railings.
- 10** Secure all of the inner rail.³

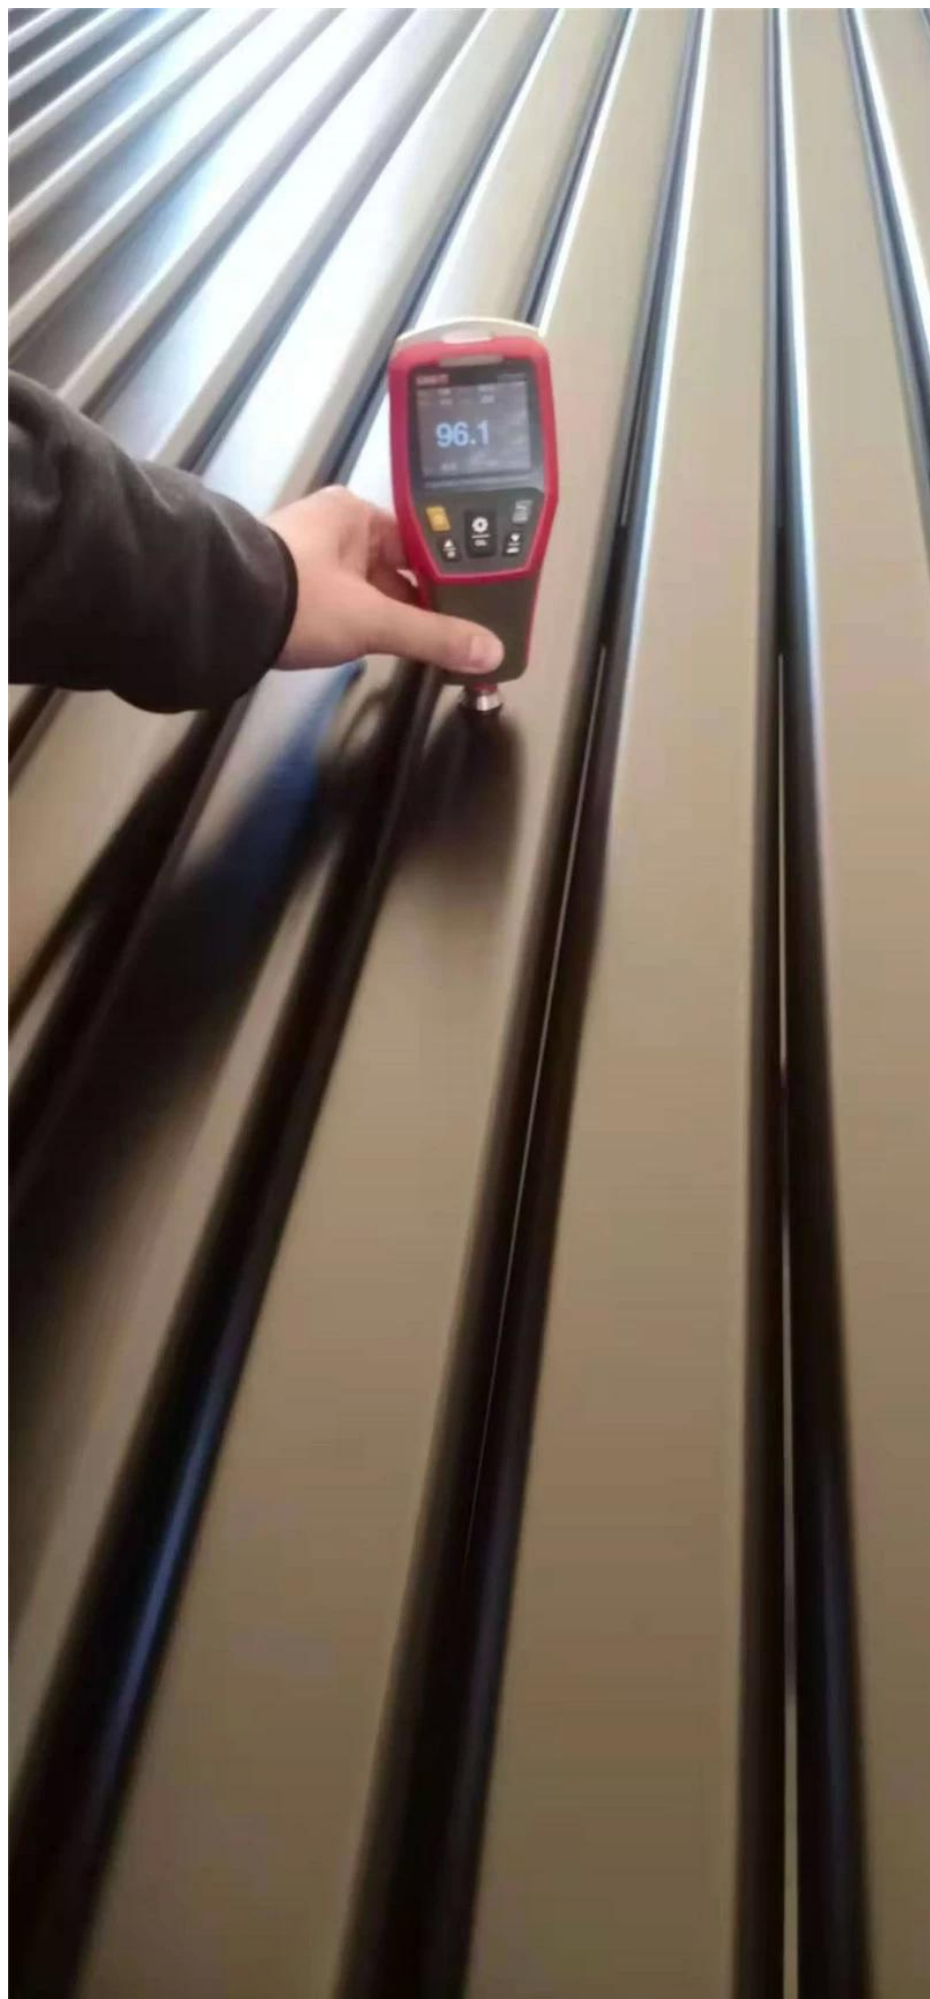
² Double check posts are parallel and tight against inside rail before marking holes for drilling.

³ Push and pull top rail & inside rail to ensure all is secure.

Production & packaging of staircase steel handrails at our workshop

:









Please feel free to contact us for more details:

Contact: Eve

Email: sales03@launch-china.cn

HP/WhatsApp: +8613686807796