Glass Railing Kits <u>Aluminum Profiles Handrail Stanchion</u>

Product Description

| Product Mame | Glass railing kits aluminum profiles handrail stanchion |
|------------------------------|---|
| Material | Aluminum 6063 T5 |
| Finish | Powder coating (black,white,gray or customers' color) |
| Maximum Glass Thickness | 12mm |
| Sqaure Handrail Dimension | 50x50mm,3mm thickness |
| Round Handrail Dimension | Diameter 50mm,3mm thickness |
| Standrad Height | 1265mm or customers' heights |
| Installation | Surface mounting or core drill mounting |
| Strength Test Report | Available |
| Ready to Install | Yes |
| Floor to Glass Disance | 50mm |
| End Cap to Glass Distance | 10mm |
| Sold as A Kit | Base plast & cover, top end cap, 50mm length welded aluminum insert at the bottom,plastic seat for glass to sit on, plastic channel |
| Available Handrail Types | 1) half post 2) one way end post 3) 2 way 180 degree 4) 2 way 45 degree 5) 2 way 90 degree 6) 2 way 135 degree |
| Appliaction | Swimming pool, blacony, staircase, deck, porch, garden glass railig handrail |
| Sample | Available to check quality before order |
| Factory Inspection | Available |
| Safety Packing | Bubble bag - cardboard box - carton or customer's requirements. |

Glass Railing Aluminum Handrail Destails


1) Round aluminum handrail



2) Square aluminum handrail



3) Aluminum handrail drawing

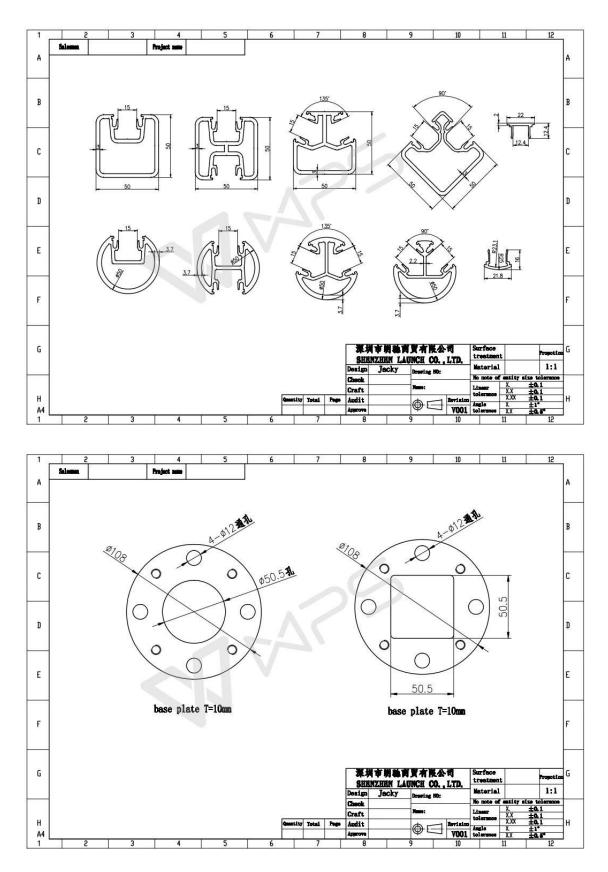

4) A kit of aluminum handrail stanchion





Aluminum Handrail Strength Test Report

Introduction

MTS Metallurgical Testing Services was engaged at the dient's request to witness the installation of a sample pool fence post and to subsequently conduct load tests on the post to the requirements of the Australian Standard AS 1926.1 - 2012.

Standard/Specification AS 1926.1 - 2012, Section 3.2 and Appendix B

Results Summary

| ID | ltem/Heat No. | Dimensions/Type/Details | Finish | Overall Assessment |
|----------|---------------|--|---------|-----------------------|
| 14110/01 | ASB1265 | 1265mm High, 50mm Square, Aluminium, Base Plate | 6063-T5 | COMPLIES |

Remarks

After completion of the testing, the post was found to be in sound condition with no breakage, tearing or signs of fracture and no looseness of the fixings.



Colin Lorrimar Metallurgical Testing Manager



Glass Railing Aluminum Handrail Projects Photos









FAQ

1.Are you factory Yes, we are factory.

2.Do you offer free samples? Yes, we offer free samples, but customers need to pay express charges.

3.What materials do you have? We have the material of stainless steel 304, 316, 316L and Duplex 2205.

4.What is your MOQ? MOQ of order required is 1 pc.

5.What kind of payment do you accept? We accept the payment of T/T, LC, PayPal, West Union, etc.

6.What is your payment term?

Our payment term is T/T[]100% or 30/70[]or L/C at sight .

7.What is your delivery time?

Our delivery time is from 5 days to 30 days based on your quantity.

8.Do you offer OEM & ODM service?

Yes we offer OEM&ODM service.

9.Do you offer after-sales service?

Yes, we offer after-sales service. Any complaint for orders will be dealt with in time within 12 hours.

Contact

Thank you for visiting ! Any enquiries or questions, please leave a message. Will get back to you within 24 hours. For any urgent enquiry, please get in touch below: -Contact: Doris -Email: sales04@launch-china.cn -Office: (86-755) 8603 7559 -Skype: launch_04 -Mob/whats APP: +86-13530506265



董 萍 Doris Dong Senior Sales Representative \$ (86) 135 3050 6265

深圳市南山区南山大道1092号亿利达大厦B区3栋5003

Room 5003, Building 3, Yilida Building, No. 1092 Nanshan Road, Nanshan District, Shenzhen, China postal code 518054

(86-755) 8603 7559

- (86-755) 8637 2611
- sales04@launch-china.cn
- www.launch-china.com www.chinabalustrade.com