


Projetos de trilhos de aço da varanda Projetos exterior do jardim do trilhos do jardim do pátio do pátio do metal do pátio do metal do jardim

Nome do Produto	Trilhos de metal de metal	Tamanho normal	H 1,1 m * w 1,2 m
Limite alto	2 M.	Espessura do tubo	1,2-2,5 mm.
Iniciando o batch	20 m ou 20□	Local de produto	Província de Guangdong, China
Material	Aço	Método de cálculo do preço unitário	Altura abaixo de 1,2 m em metros, altura acima de 1,2 m na praça
Construir	montado e soldado	Tratamento da superfície	Revestido em pó



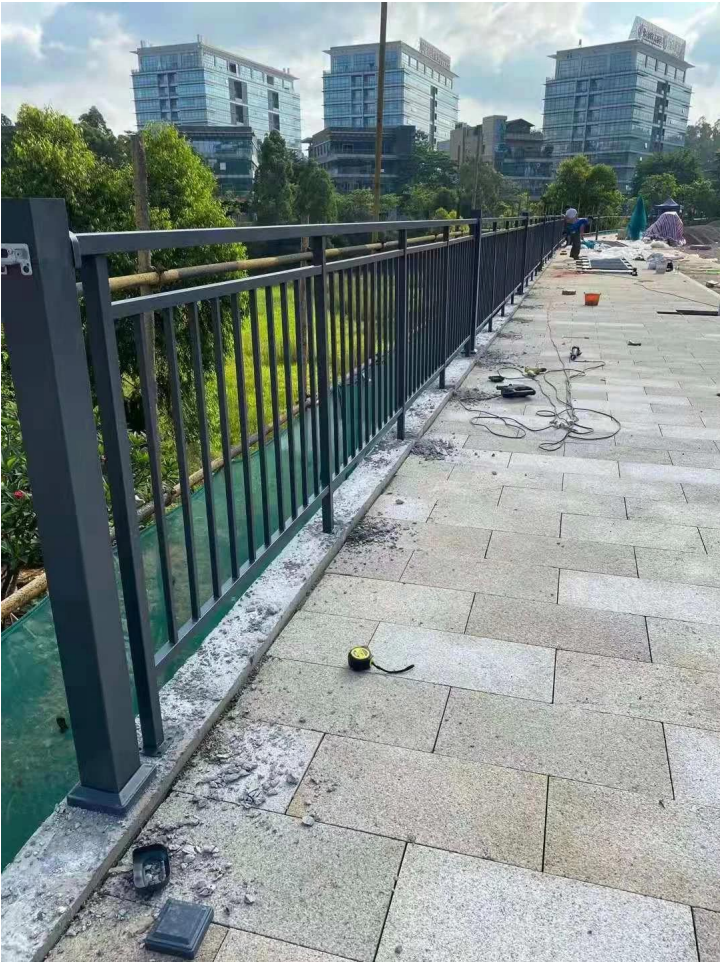

Conjunto:














Guias de instalação:

Guard Rail Assembly Instructions

Tools Required: Electrical Power Drill
(Impact Drill Preferred)

Overview: Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.




² Double check posts are parallel and tight against inside rail before marking holes for drilling.

¹ Inside rail will be loose until each post is secured to the ground.

³ Push and pull top rail & inside rail to ensure all is secure.

Produção Embalagem de Escadaria açor corrimãos. nonosso oficina:



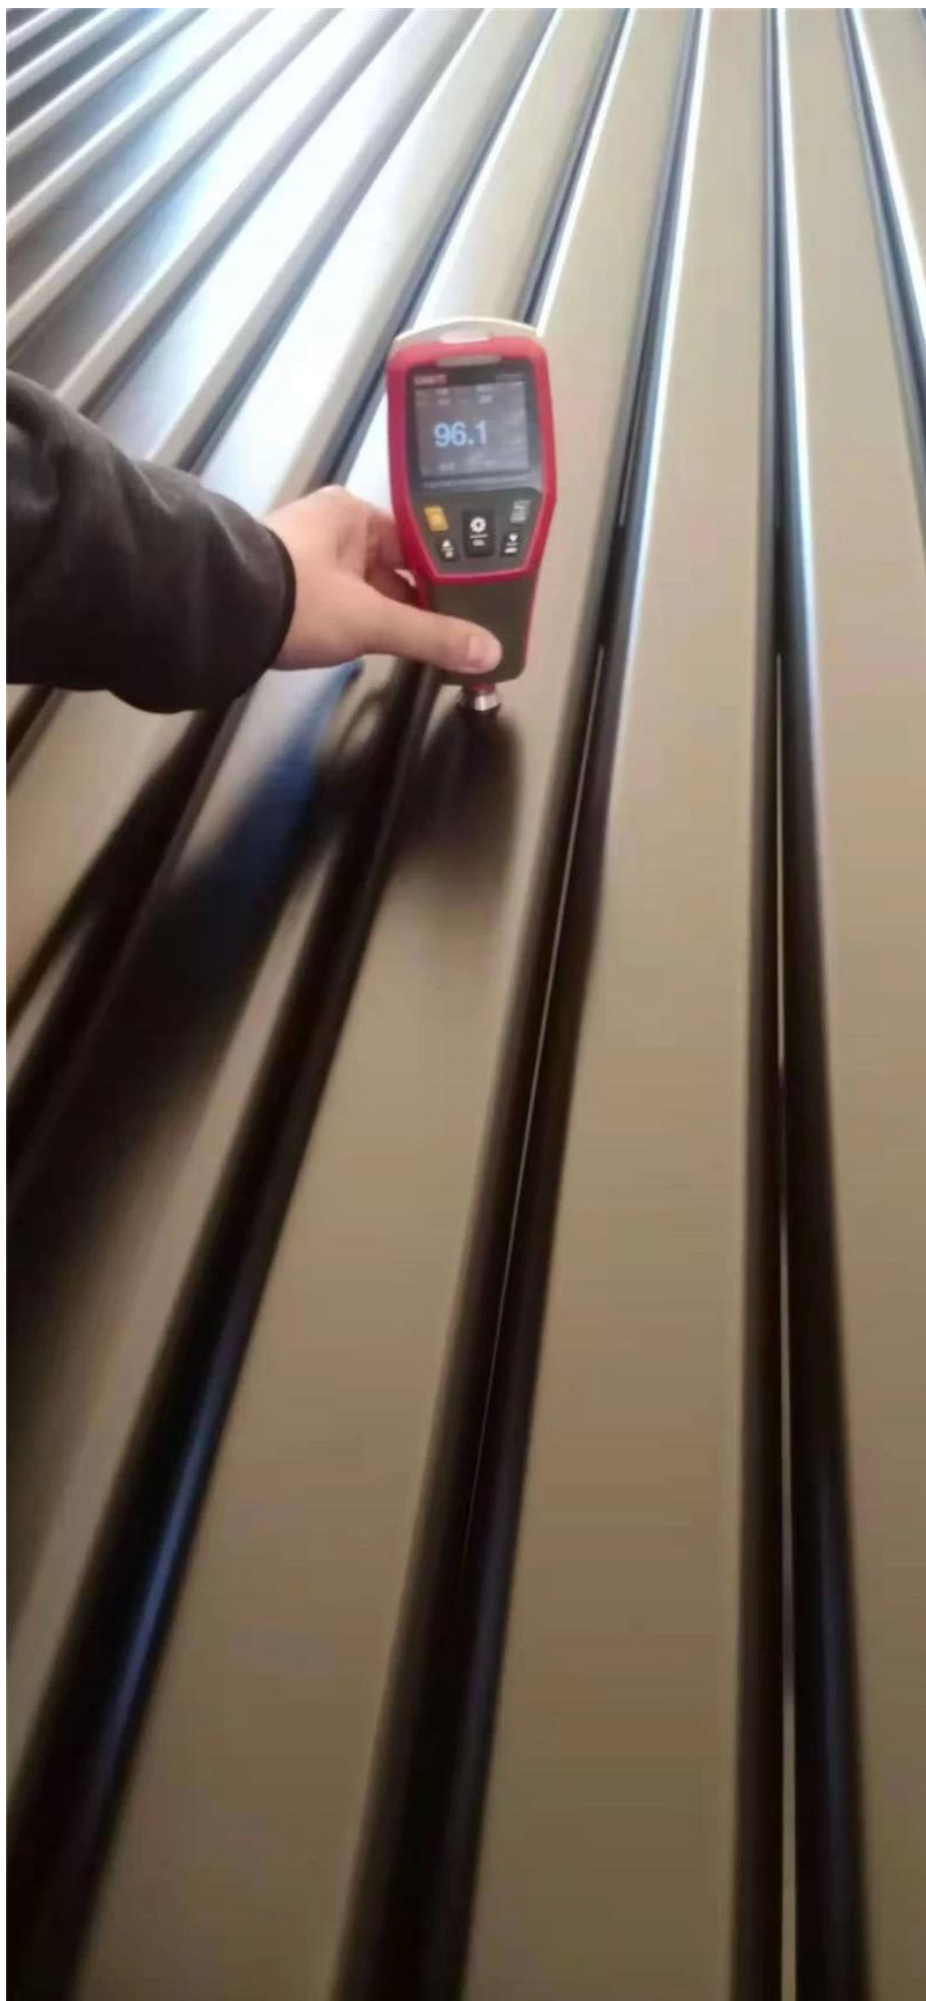





Por favor sentir gratuitamente para contatónos para mais detalhes:

Contato: véspera

E-mail:sales03@launch-china.cn.

HP / WhatsApp:+8613686807796.