



Corrimãos de ferro galvanizado projetos de trilhos de varanda com revestimento de pó antigo projetos de trilhos de aço galvanizado corrimãos montados no piso

Nome do Produto	Correio de aço galvanizado	Tamanho normal	H 1,1 m*W 1,2 m
Limite alto	2 m	Espessura do tubo	1,2-2,5 mm
Iniciando lote	20 m ou 20□	Local do produto	Província de Guangdong, China
Material	Aço	Método de cálculo de preços unitários	Altura abaixo de 1,2 m em metros, altura acima de 1,2 m em quadrado
Construir	montado e soldado	Tratamento da superfície	Pó revestido



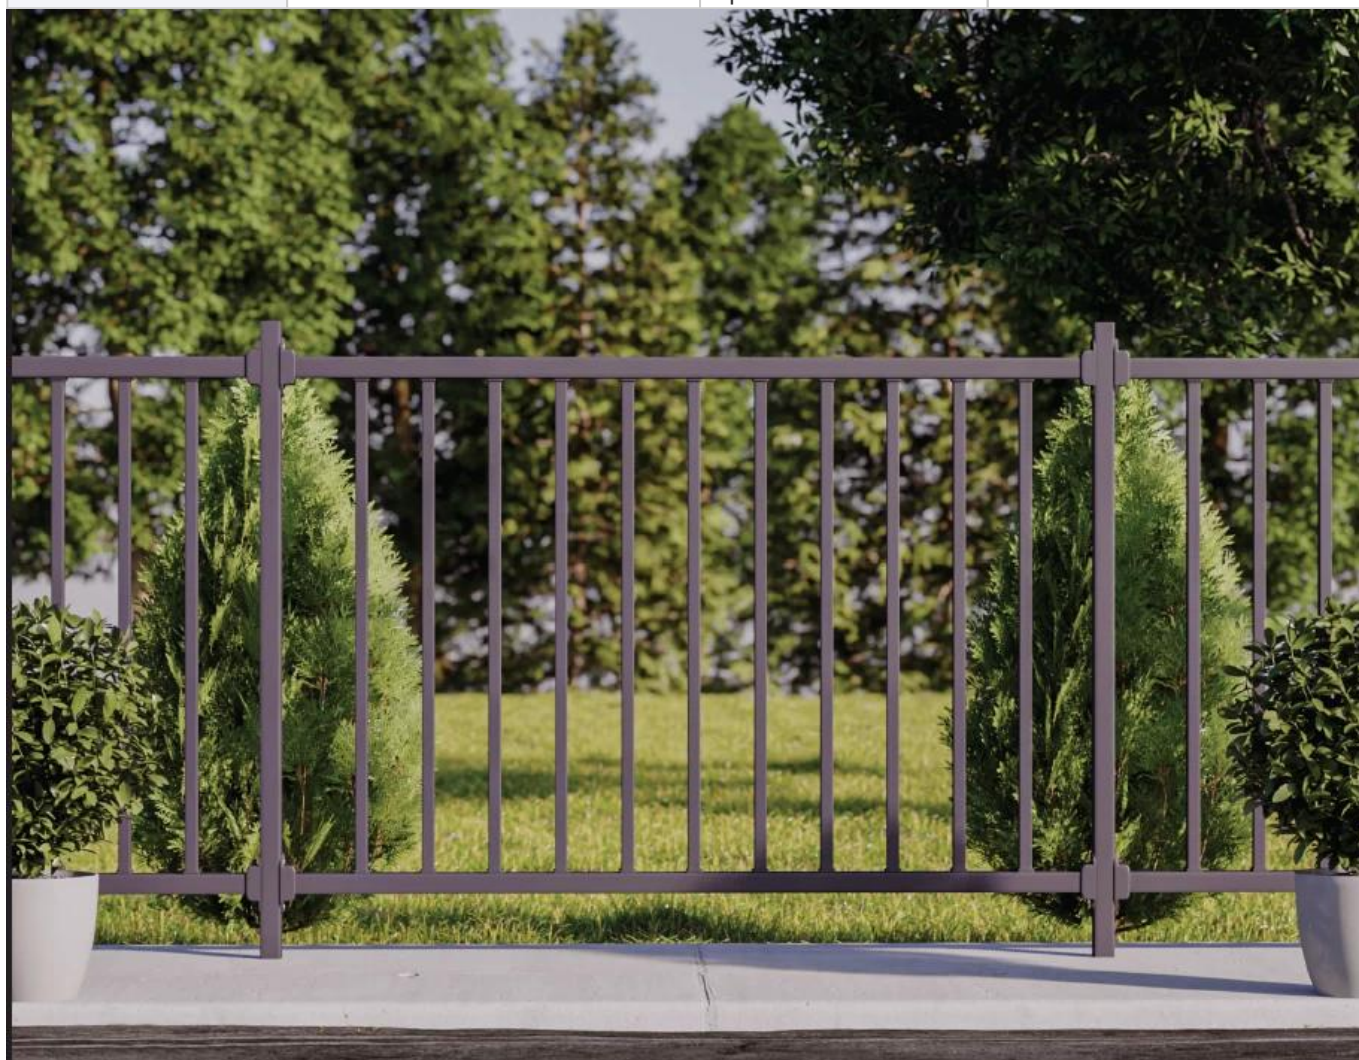

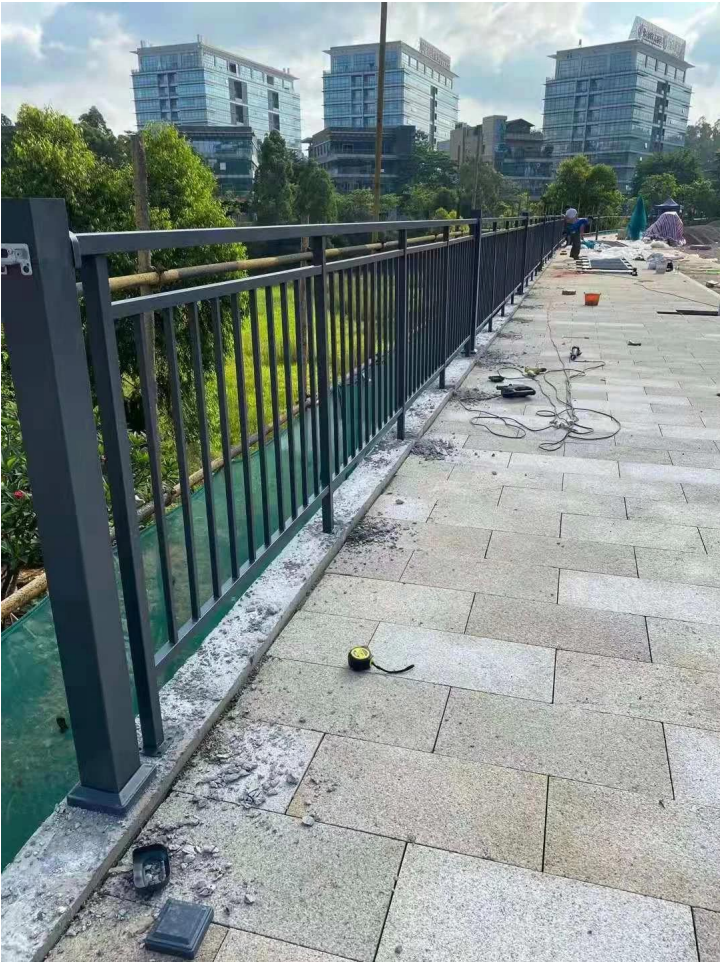

Conjunto:














Guias de instalação:

Guard Rail Assembly Instructions

Tools Required: Electrical Power Drill
(Impact Drill Preferred)

Overview: Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.




² Double check posts are parallel and tight against inside rail before marking holes for drilling.

¹ Inside rail will be loose until each post is secured to the ground.

³ Push and pull top rail & inside rail to ensure all is secure.

Produção&embalagemdeEscadariaaçocorrimãosnonossooficina:



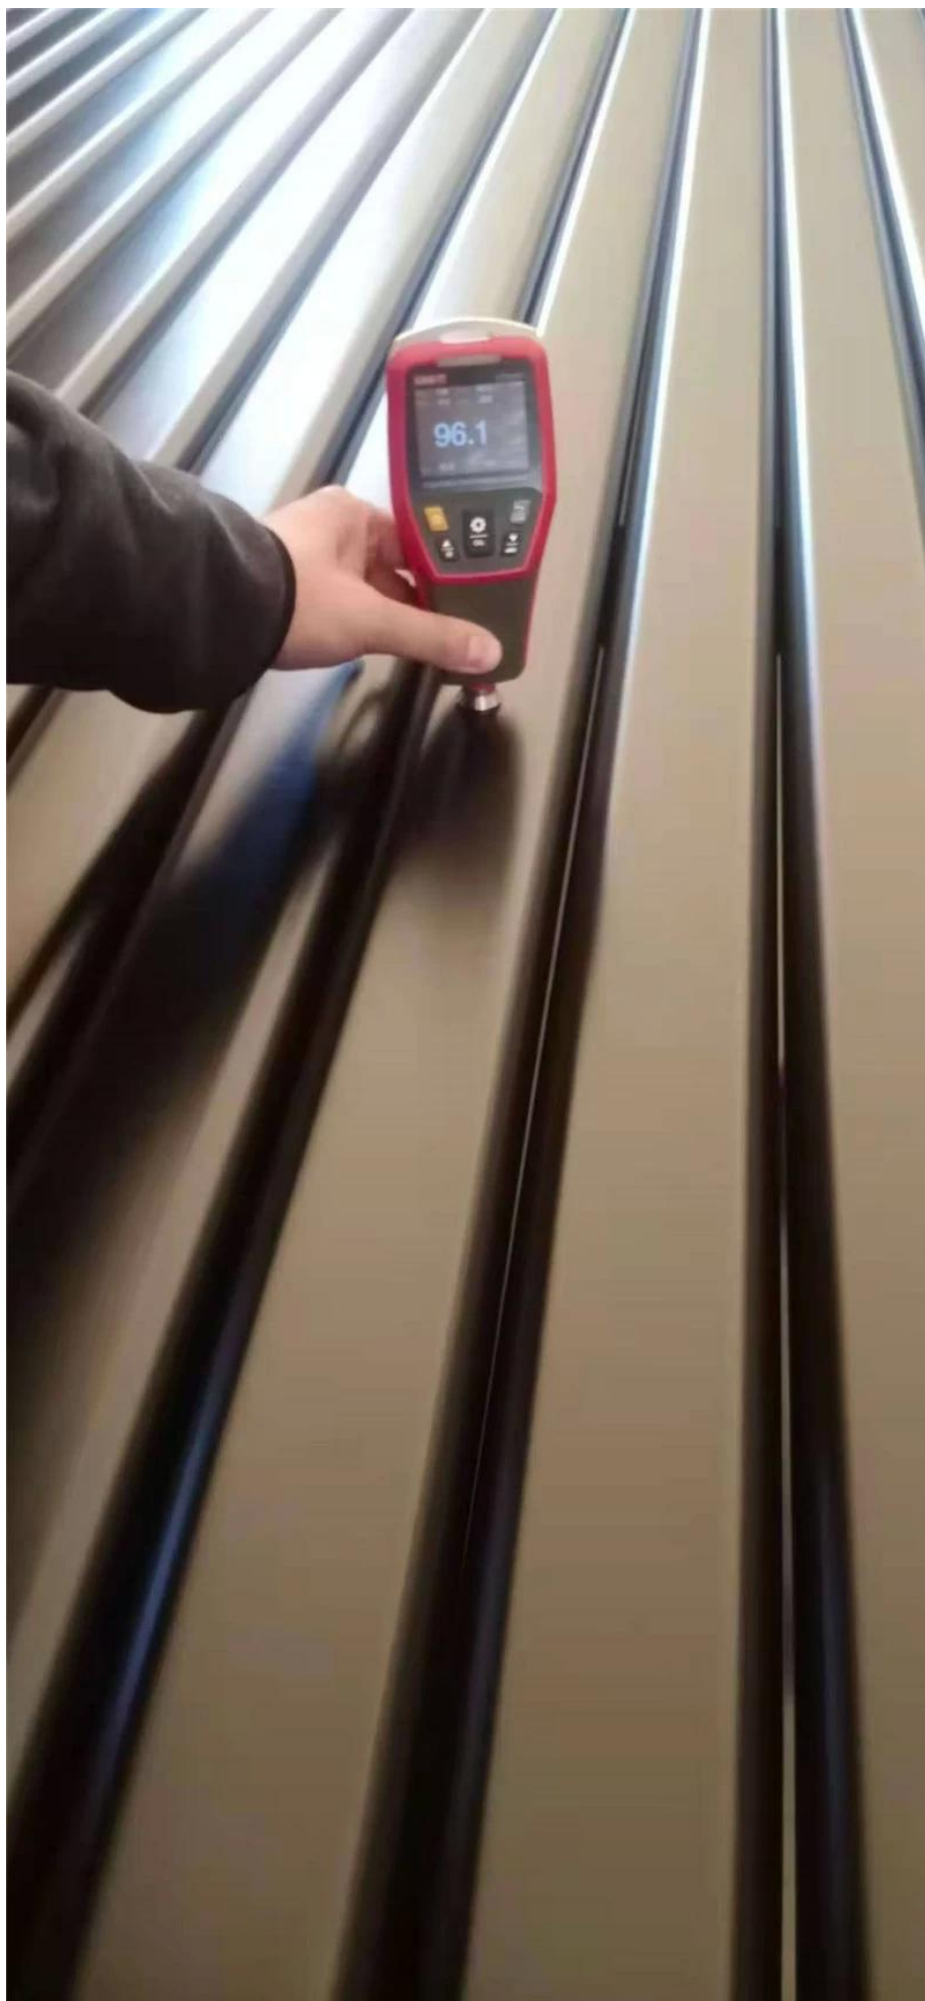





Por favor sentir gratuitamente para contatónóspormais detalhes:

Contato: Véspera

E-mail:sales03@launch-china.cn

HP/WhatsApp:+8613686807796