



## Hot-Mergulhe Galvanizado Ferro Ferro Varanda Segurança Cerca De Segurança Aço Corrimão Balustrada Balustrada

Nome do Produto	Corrimão de aço galvanizado	Tamanho normal	H 1,1 m * w 1,2 m
Limite alto	2 M.	Espessura do tubo	1,2-2,5 mm.
Iniciando o batch	20 m ou 20□	Local de produto	Província de Guangdong, China
Material	Aço	Método de cálculo do preço unitário	Altura abaixo de 1,2 m em metros, altura acima de 1,2 m na praça
Artesanato	montado e soldado	Tratamento da superfície	Revestido em pó



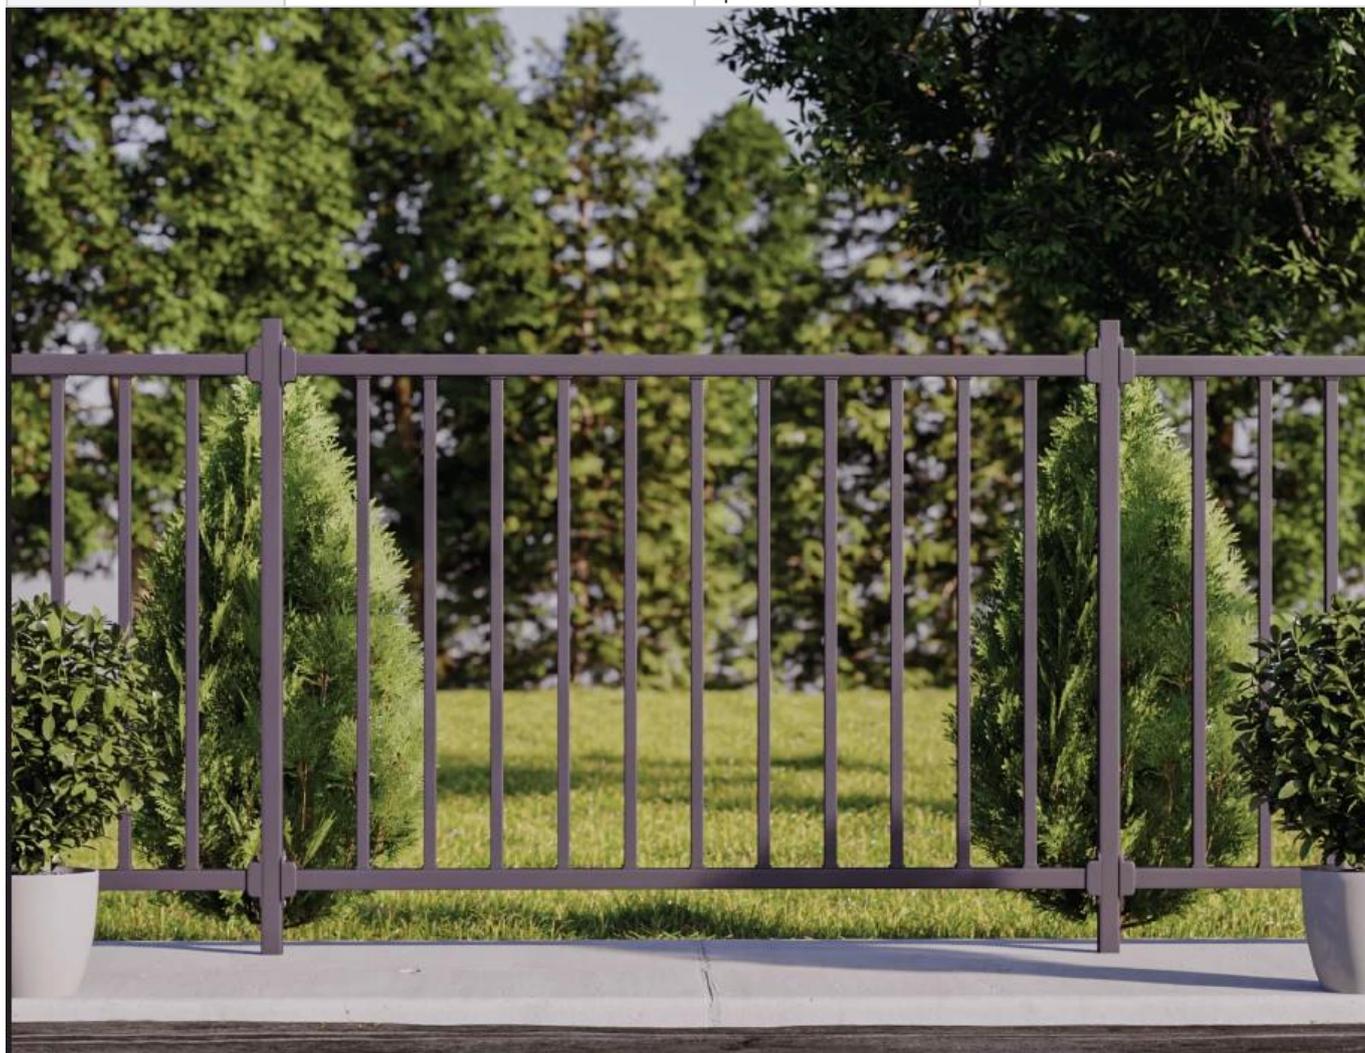

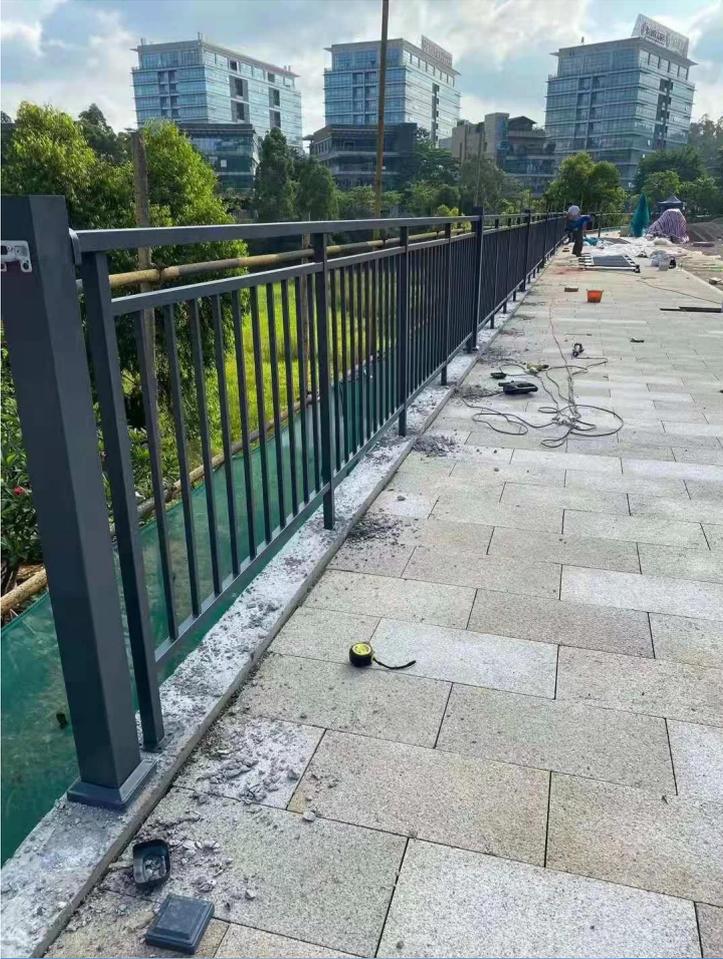

**Conjunto:**














**Guias de instalação:**

# Guard Rail Assembly Instructions

**Tools Required:** Electrical Power Drill  
(Impact Drill Preferred)

**Overview:** Assemble the rail and position it before marking holes for drilling. Improper installation can lead to failure of rail system or injury.



<sup>2</sup> Double check posts are parallel and tight against inside rail before marking holes for drilling.

<sup>1</sup> Inside rail will be loose until each post is secured to the ground.


<sup>3</sup> Push and pull top rail & inside rail to ensure all is secure.

**Produção Embalagem do Escadaria aço corrimãos. nonosso oficina:**



**KEBIL®**

SHENZHEN LAUNCH CO., LTD

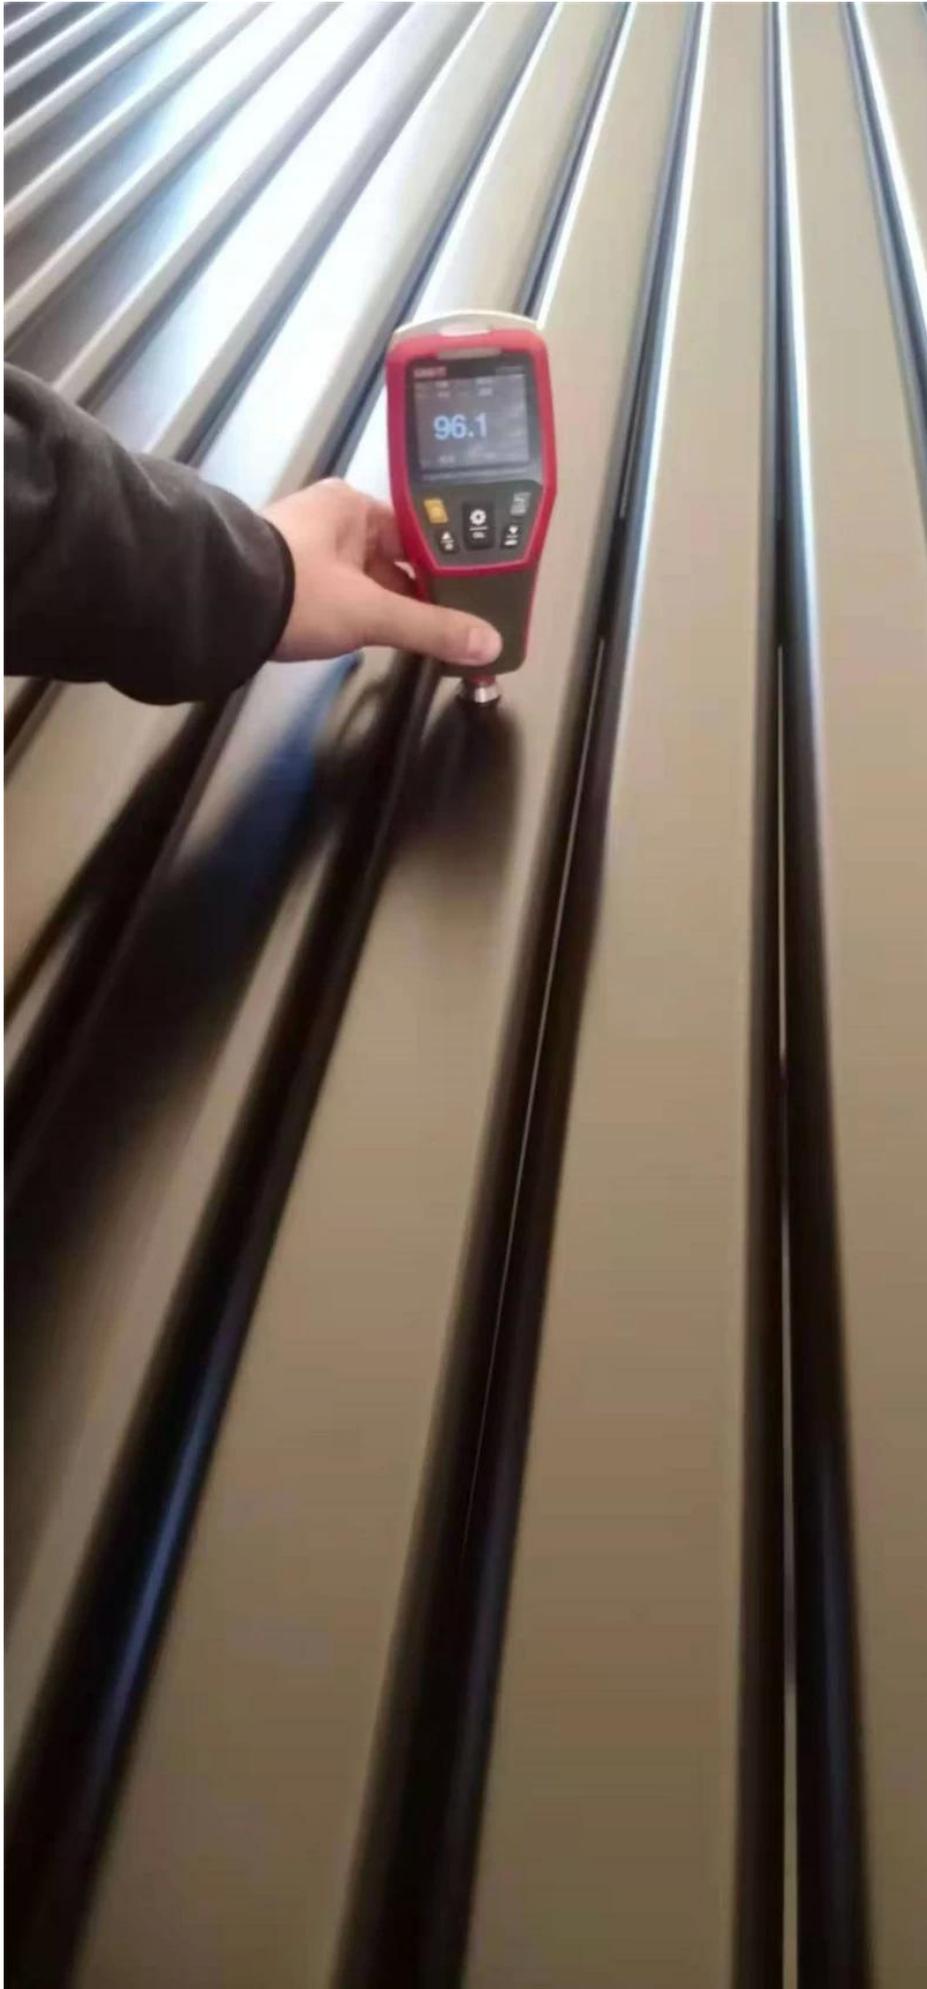





**Por favor sentir gratuitamente para contatónos para mais detalhes:**

**Contato: véspera**

**O email:sales03@launch-china.cn.**

**HP / WhatsApp:+8613686807796.**