

Спецификации

Название продукта	Алюминиевые сплавы раздвижные окна с двойным остеклением
Материал	Алюминиевый сплав 6063-T5 Профиль стекло аксессуары
Параметры профиля	Бренд профиля: китайский бренд
	Толщина профиля: 2,0 мм
	Обработка поверхности: порошковое покрытие, анодирование, покрытие PVDF и т. Д.
	Цвет: белый, черный, серый, нестандартный цвет
Стекланные варианты	Стандартная спецификация: 5 мм27A5 мм
	Материал: закаленное стекло
	Цвет: Ультра прозрачный, чистый, матовая, серая, зеленая, индивидуальная цвет
	Типы: одиночное стекло, ламитативное стекло и т. Д.
Другие аксессуары	Запечатывающая полоса: Materail EPDM
	Замок: китайский топ -бренд
	Трек: рельс из нержавеющей стали
	Роллер: высокопрочный полиамид






Window types



C1

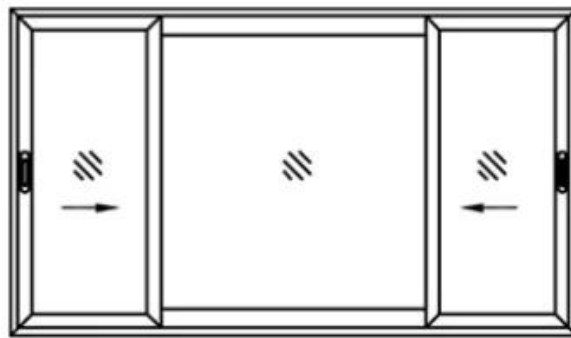

C2




C3



C4



C5

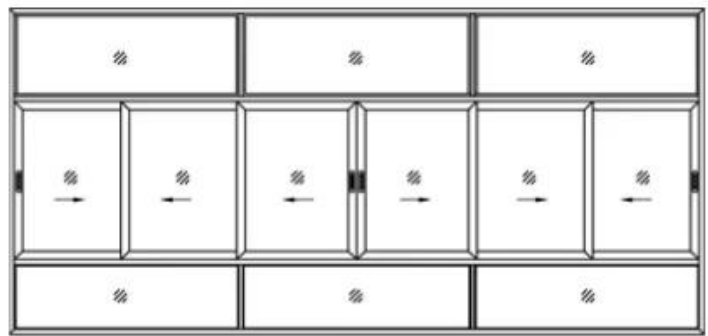


C6

Glass Types

Variety Of Glass & Profile Available



Temperde glass

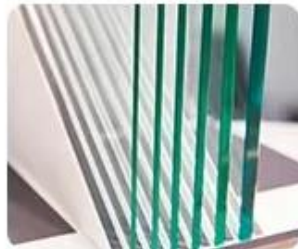


Single glass



Double glass



Triple glass

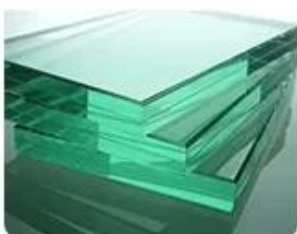

Laminated glass



Frosted glass




Low-E glass




Reflective glass



Single panel glass

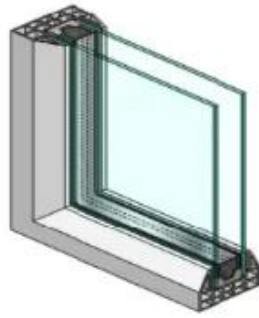

Double panel glass

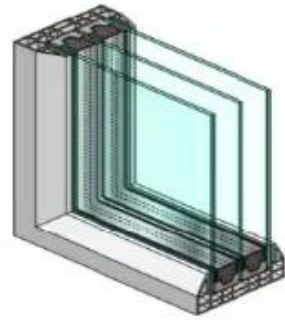


Triple panel glass



Safety hardware

- Automatic lock and child lock configuration to enhance safety performance

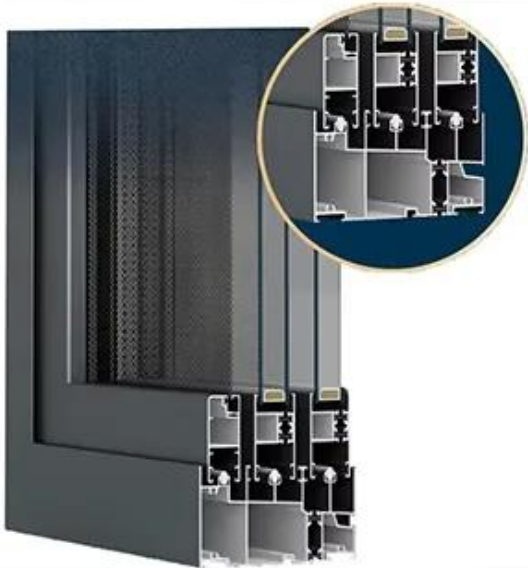

Safety and anti-derailment

- Wind resistance
- Sound insulation
- Thermal insulation

Double-blocked hidden drainage


- Water tightness
- Air tightness



Applications



Kitchen

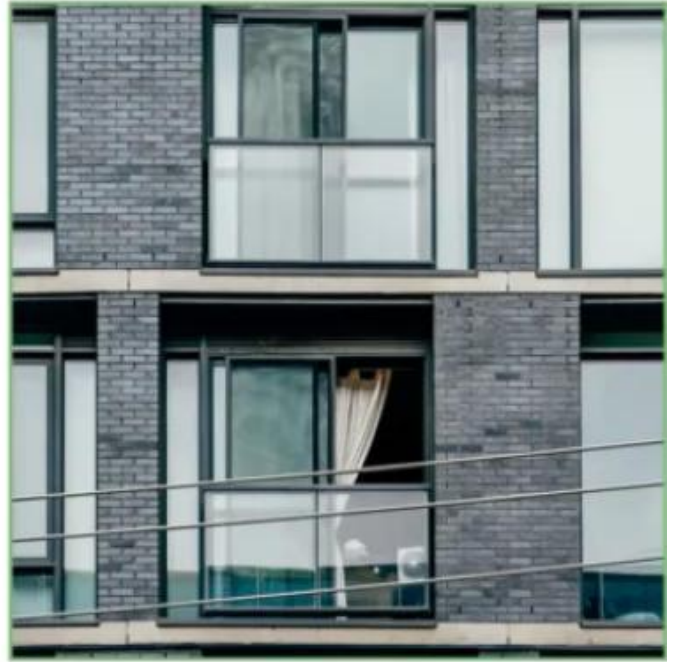

Home



Doorway



Living room



Bedroom



Hostel

Workshop



1.3D&CAD drawing



2.Thermal break



3.Cutting profile



4.Lock milling



5.Profile assembling



6.Glass assenbling



7.Sealing



8.Testing



9.quarantine