Сертификация SGS Alibaba проверено поставщиком золота плюс и 12 лет членства

COMPANY INTRODUCTION



Alibaba.com Gold Plus Supplier

Main Product Lines Verification Report

Presented to

Shenzhen Launch Co., Ltd.

深圳市朗驰商贸有限公司

Company Address	B5003, Building 3, Yilida Building, No. 1092 Nanshan Avenue, Dengliang Community, Nanshan Street, Nanshan District, Shenzhen City, Guangdong Province, China
Consigner of Assessment:	Alibaba
Gold Supplier Member ID:	launch168
Gold Supplier Company Name:	Shenzhen Launch Co., Ltd.
Contact Person:	Mr. Binfeng Gao
Phone Number:	0086-13802569770
Fax Number:	0086-755-86372611
Email:	gbf999@china.com
Website Address (URL):	http://launch-china.en.alibaba.com

Service Provided by SGS Report No.: 19536352_P+T





Alibaba.com Gold Plus Supplier



Assessment Report

Presented to

Cooperation Company of Shenzhen Launch Co., Ltd.

深圳市朗驰商贸有限公司合作工厂

Gold Supplier & Assessed Company Relationship:	☐ Self-owned ☐ Wholly Owned ☐ Shareholder/Partner ☐ Kindred between Owners ☒ Cooperation Partner
Company Address	Confidential
City / Country:	Huizhou / China
Consigner of Assessment	Alibaba & Shenzhen Launch Co., Ltd.
Gold Supplier Member ID:	launch168
Gold Supplier Company Name:	Shenzhen Launch Co., Ltd.
Contact Person:	Confidential
Phone Number:	Confidential
Fax Number	Confidential
Email:	Confidential
Website Address (URL):	http://launch-china.en.alibaba.com

Service Provided by SGS Report No.: 19552720_P

E2Alibaba.com



WHY CHOOSE US



15 YEARS **EXPERIENCE**

We have been manufacturing railing hardwares since 2004.



ONE STOP **SERVICE**

We provide integrated railing solutions. We manufacture.

We deliver




PROFESSIONAL R&D TEAM

We have engineering experts for developing new products.



TOP QUALITY & GOOD PRICE

We are strict on quality control as well as cost evaluation.

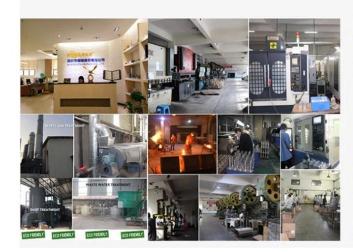

ABOUT US

Shenzhen Launch Co., Ltd was established in 2004, located at Nanshan District, Shenzhen, and one hour by car from Hongkong International Airport. Our main products are high-grade building materials including stainless steel balustrade post, staircase handrail, balcony guardrail, swimming pool fence and other high-grade building materials. All the products are designed strictly according to the high-end market requirements. We have our own factory in Tangxia Town, Dongguan, with more than 50 sets of various precision equipments, such as CNC lathe, milling machine, punching machine, pipe cutter, argon welder, drilling machine, polisher, etc. which can provide customers with complete product processing services.

Балкон Балюстрада 12мм <u>Стеклянный забор 2205 Spigots</u>

Стеклянный забор 2205 цапфы

- Материал: нержавеющая сталь дуплекс 2205
- Отделка: зеркало / сатин / черный / золотой цвет
- Для стекла толщиной 10-13,52 мм
- Монтаж: напольный монтаж / поверхностный монтаж / монтаж колонкового бурения
- Производитель метед: литье (высокое качество)
- MOQ: 1 шт.
- Встречайте Австралию AS1926.1-20012 / AS2820 защитные барьеры для усложнения ворот бассейна
- Применение: ограждение бассейна, балкон, палуба, лестница, веранда ... ограждение из стекла


4 модели стакан забор 2205 втулка доступный

Напольный монтажный кран




Стержневое сверло



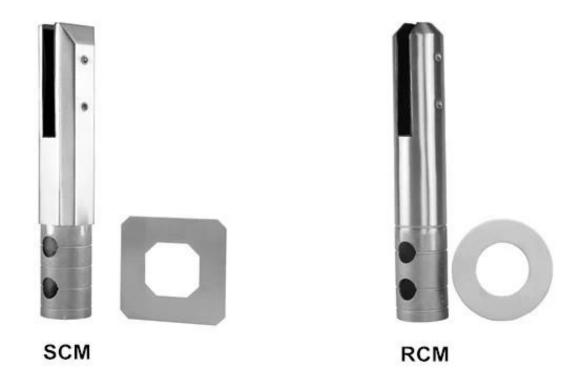

Core Drill Duplex 2205 Spigot

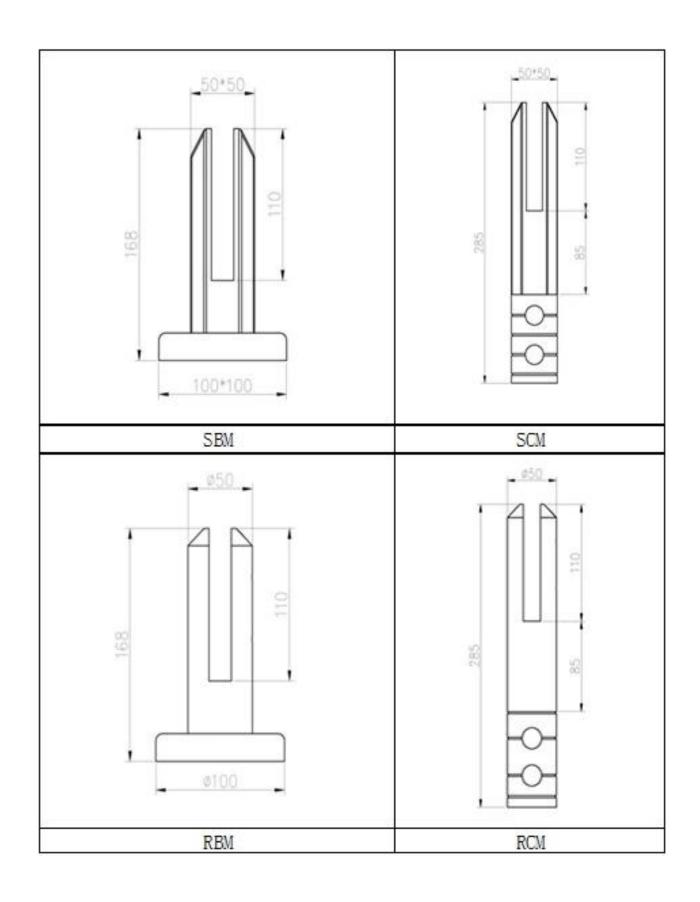

Стакан забор 2205 втулка монтаж



fixing method: base plate spigots


Mark out the centre line of proposed glass fence with a chalk line. Determine clamp location based on a sheet size (recommendation on pages 1 & 2). Use base plate as a template to mark out the hole positions and drill holes to suit.


Note: Do not exceed 100mm gaps between glass panels. Optimum gap is 40mm to 60mm

Now the base plated spigots can be fitted to the floor and plumbed via shims (not supplied) under the base plates. Be sure to tighten firmly as the smallest of movement at the base plate will result in noticeable movement at the bottom of the glass fence.

Tip: By setting the two outer spigots of your total span, a string line can be run in the 'throat' of the spigots, giving correct height for all spigots in between

Note: Do not exceed 100mm gap from the fixing surface to the bottom of the glass





When all spigots are installed, slip domical cover the top of the spigot to hide fixings. It will be necessary to turn the adjustment screws on the spigot face all the way in to allow cover to pass over


Note: Same installation method applies to round base plate spigot

domical cover

The glass is then installed to the spigots.
Place plastic packers between glass & spigot, at no stage should glass touch the metal

How adjustability works:

- Place glass in spigot
- 2. Fix/ tension glass both sides with allen key



Стакан забор 2205 втулка проект фото





Другие продукты вы май интерес

- Черный / золотой цвет стеклянный забор 2205 патрубок
- Съемная крышка поручня из нержавеющей стали
- Магнитная защелка и подпружиненный шарнир









Marine duplex 2205 electroplate black spigot







контакт

Спасибо за посещение! Любой вопрос или запрос, пожалуйста, оставьте сообщение. Мы свяжемся с вами в течение 24 часов.

Любой срочный запрос, пожалуйста, свяжитесь с нами ниже:

-Контакт: Doirs

-Электронное письмо: sales04@launch-china.cn

-Офис: (86-755) 86037559

-Mob / Whats приложение: 0086-13530506265

-Skype: launch_04