


Unsere Schlussverkauf Glas treppe Geländer Entwürfe:

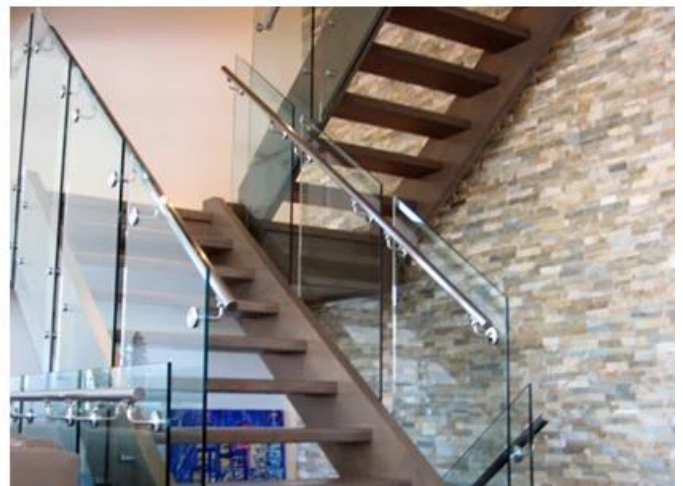


Moderne Innenglastreppengeländer-Geländersätze

| | | |
|---|---------------------|---|
| 1 | Material & Fertig | Edelstahl 304/316; Satin oder Hochglanz |
| 2 | Höhe | 1000 MM / Benutzerdefinierte Größe |
| 3 | Pfosten | D50,8 * 1,5 (mm) Rohr; 4-fach verstellbare Oberschienenhalterung; Quadratische oder runde Glasklemme. |
| 4 | Obere Schiene | D50,8 * 1,5 (mm) Hohlrohr |
| 5 | Sicherheitsgeländer | 10mm / 12mm gehärtete Klarglasscheibe |


| | | |
|----|------------------|--|
| 6 | Verwendung & Ort | Baluster, Balustrade, Geländer, Zaun, Handlauf, Geländer; Balkon, Brücke, Deck, Garten, Patio, Pool, Veranda, Treppe, Terrasse |
| 7 | Installation | Top / Side montiert |
| 8 | Paket | EPE + Inner Box + Karton |
| 9 | Bedienung | 1, Matchable Zusätze und Befestigungen werden zur Verfügung gestellt; 2, Bauplanung; 3, professionelle ingenieur ratschläge; 4, Installationsanleitung; 5, OEM, ODM, Kundendesign; |
| 10 | Kontakt | E-MAIL, SKYPE, WhatsApp, WeChat und QQ werden auf den folgenden Bildern als Wasserzeichen angezeigt |




LCH-106

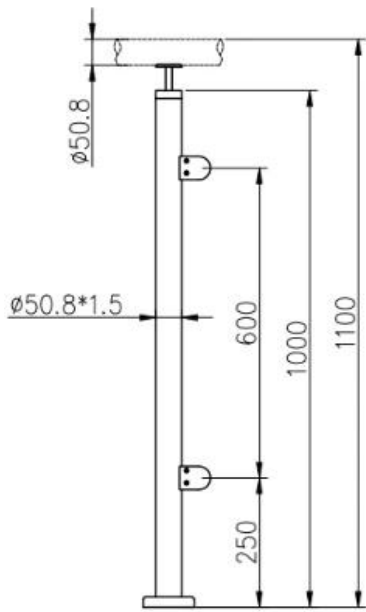

LCH-107

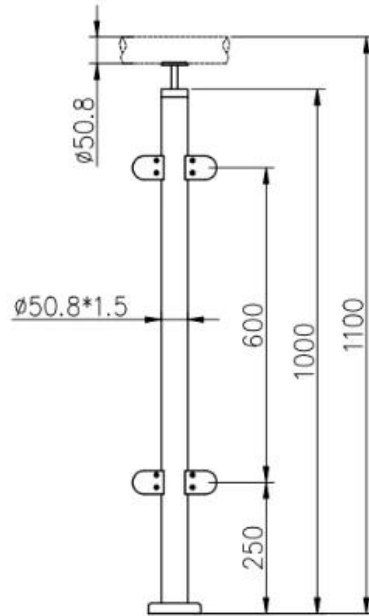

LCH-108

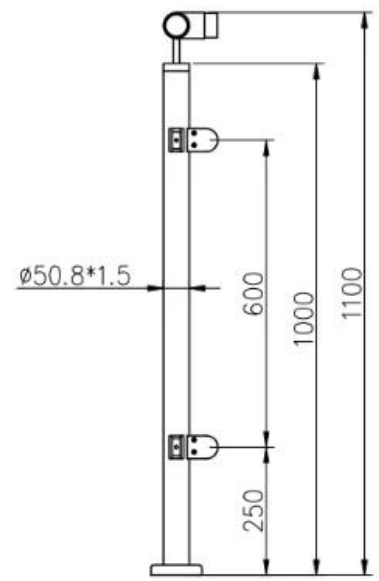

Installation:

Glass Clamp Installation Guide



Mark and centre punch desired location of blind rivet nut location.



Drill centre punched hole in tube to suit blind rivet nut.



Insert blind rivet nut into tube and fasten with blind rivet tool.



Check installed blind rivet nut is secure and ready for install.



Align half glass clamp with blind rivet nut inline position. Screw in button head cap screw into thread and tighten with hex key.



Select appropriate rubber gasket to suit glass panel thickness. Install rubber gasket into both sides of glass clamp. (Note rubber gasket marked with sizes).



If heavier clamping load is required please use supplied glass clamp pin, during the install process. Note glass panels will require drilling in order to fit glass clamp pins.



Fit glass panel into position, install second half of glass clamp secure with provided hex screws.





Tighten glass clamps with hex key, and check glass panel are secure with no movement.

Projekt zeigen





Zum Balkon Geländer Entwürfe:

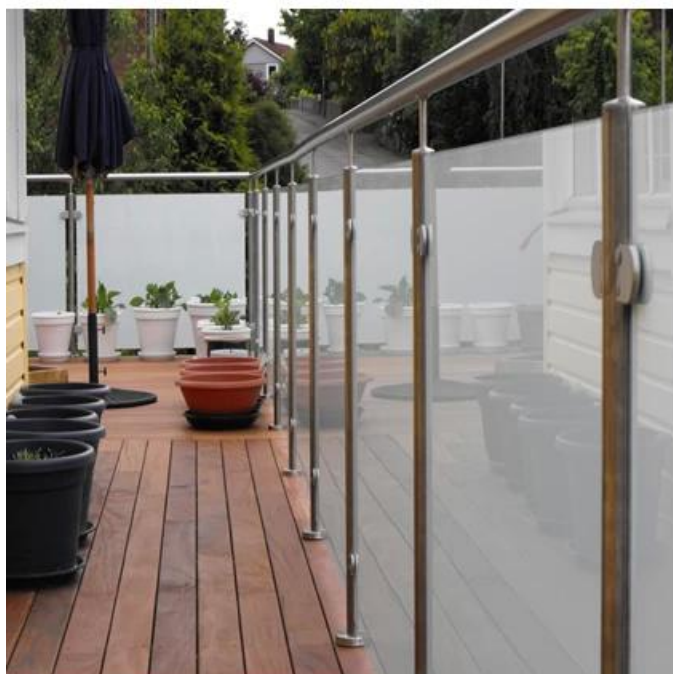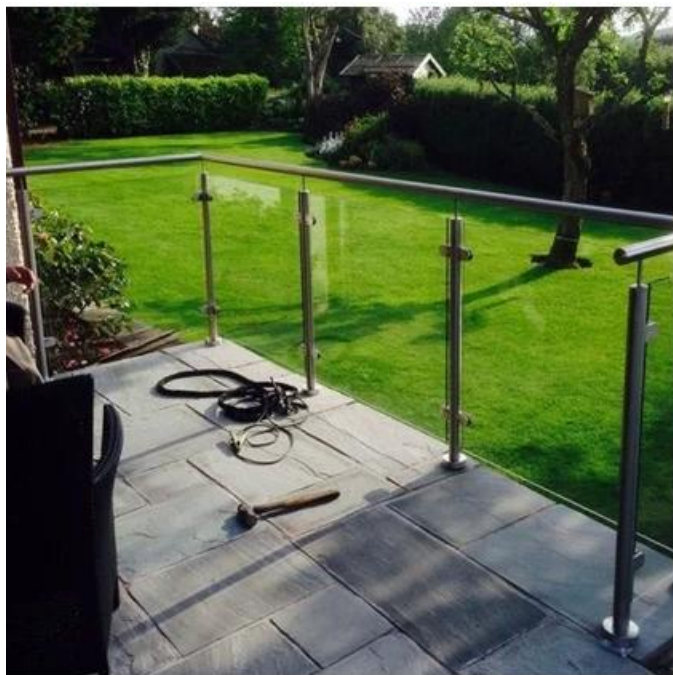

Gefühl kostenlos zu Kontakt uns:
Eve Chow
sales03@launch-china.cn
HP / WhatsApp: +8615907334556