
.دوبلكس 2205 الفولاذ المقاوم للصدأ في الهواء الطلق درج حديدي الزجاج حنفية المشبكإلى عن على10-12 ملمبدون إطارزجاجدرابزين

الميزاتمنالزجاج حنفية المشبك#

نموذج رقم.	SBM
بند	مشبك حنفية زجاجي
مواد	دوبلکس 2205
إنهاء	الساتان ، المرآة ، الأسود
ارتفاع	ملم 168
حجم الجسم حنفية	مم 50 * 50
وزن	كجم لكل جهاز كمبيوتر 1.43
التعبئة والتغليف	جهاز كمبيوتر في صندوق ، 12 جهاز كمبيوتر شخصى في كرتون 1
سماكة الزجاج	ملم 14-10
موك	2 قطع

الرسومات من الزجاج حنفية المشبك#

-SBM رسم ل

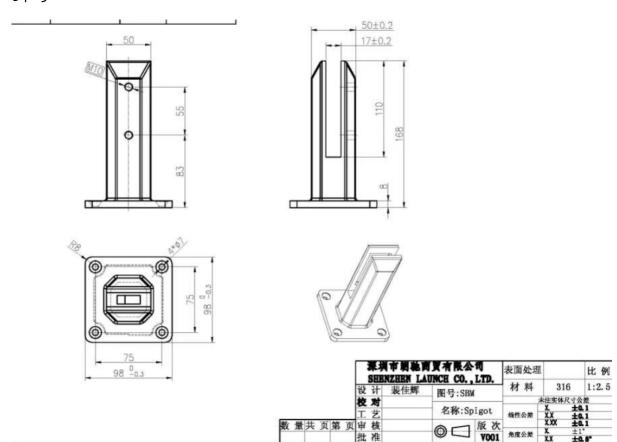

التركيبيرشدمنالزجاج حنفية المشبك#



fixing method: base plate spigots


Mark out the centre line of proposed glass fence with a chalk line. Determine clamp location based on a sheet size (recommendation on pages 1 & 2). Use base plate as a template to mark out the hole positions and drill holes to suit.


Note: Do not exceed 100mm gaps between glass panels. Optimum gap is 40mm to 60mm

Now the base plated spigots can be fitted to the floor and plumbed via shims (not supplied) under the base plates. Be sure to tighten firmly as the smallest of movement at the base plate will result in noticeable movement at the bottom of the glass fence.

Tip: By setting the two outer spigots of your total span, a string line can be run in the 'throat' of the spigots, giving correct height for all spigots in between

Note: Do not exceed 100mm gap from the fixing surface to the bottom of the glass






domical cover

When all spigots are installed, slip domical cover the top of the spigot to hide fixings. It will be necessary to turn the adjustment screws on the spigot face all the way in to allow cover to pass over


Note: Same installation method applies to round base plate spigot



The glass is then installed to the spigots. Place plastic packers between glass & spigot, at no stage should glass touch the metal

How adjustability works:

- 1. Place glass in spigot
- 2. Fix/ tension glass both sides with allen key



إنتاج&التعبئة والتغليفمنالزجاج حنفية المشبك#





مشروعغالاريمنالزجاج حنفية المشبك#







