


Ajustable Placa Base Mate 2205 Duplex Plaza Negro modelo # cristal grifo SBM de cristal sin marco Barandas Cerca de la piscina, etc.

Nuestro grifo de cristal es ajustable con 4 pequeños agujeros y tornillos adicionales en la placa base y la placa de nivelación 1 PC para ser utilizados en la parte inferior del saliente para ajustar el nivel del suelo cuando no es uniforme.

1. Características de dúplex ajustable 2205 Placa Base Mate Negro Plaza grifo de cristal, SBM

Material de espiga principal cuerpo	Duplex 2205
Material de tornillos, cubierta de la base, la placa de nivelación	acero inoxidable 316
Terminar	Negro mate de revestimiento en polvo o de chapado electro; satén; espejo
espesor del vidrio	vidrio espesor 10-13.52mm
Altura	168 mm; o se puede personalizar
junta de plástico	Hecho de material de nylon, que puede durar toda la vida por el tiempo
perno de concreto para adaptarse	M8 * 100
Peso de la unidad por la PC	1.45kg
En stock	sí
Moq	2 pcs

2. Dimensiones de SBM vidrio espiga-

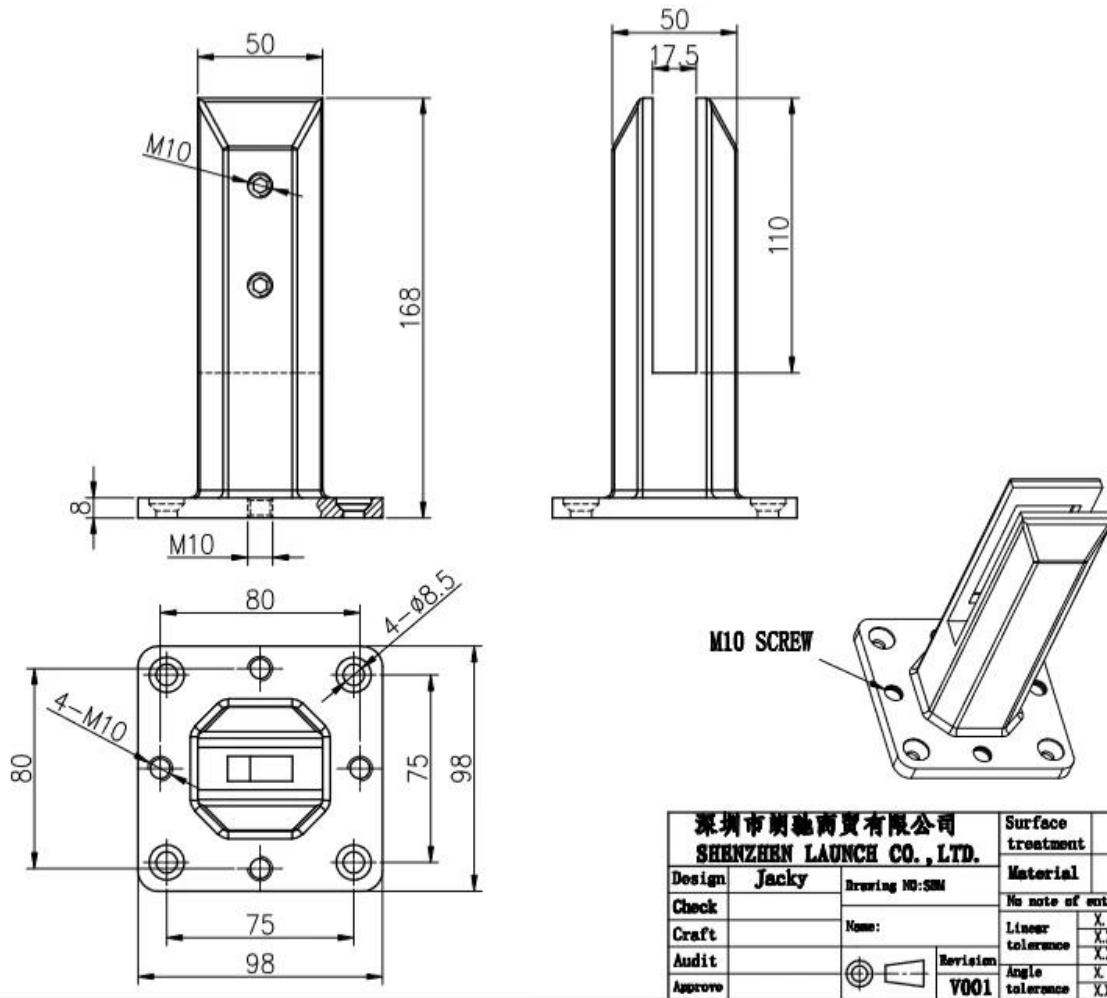

3.Cargandoprueba&MaterialpruebaporSBMvidrioespiga-

LOADING TEST FOR SBM

Introduction

MTS Metallurgical Testing Services was engaged to witness the installation of a sample pool fence spigot and to subsequently conduct load tests on the spigot to the requirements of Australian Standard AS1926.1 - 2012.

Standard/Specification AS 1926.1 - 2012, Section 3.2 and Appendix B

Results Summary

(For details of individual tests, refer to the tables on the following pages.)

ID	Item/Item No.	Dimensions/Type/Details	Finish	Overall Assessment
14117/01	SSRM316	60mm Square, Base Plate 316 Stainless steel	316i	COMPLIES

Remarks

After completion of the testing, the spigot was found to be in sound condition with no breakage, tearing or signs of fracture and no looseness of the fixings.



Colin Cousins
Metallurgical Testing Manager



Accreditation No: 15624
Accredited for compliance
with ISO/IEC 17025

Strength Test

Test Specification AS 1926.1 - 2012, Appendix B Test Procedure MTS-TP3.1 Compression Tests - Products

Specimen ID	Observations	Assessment
14117/01	Test Equipment: Hydraulic ram and 10,000 N load cell Test Load: 330N Load Duration: 45 Secs Deflection under load: 1 mm Permanent Deflection after removal of test load: 0 mm	COMPLIES

Requirements No permanent damage or loosening of fixings.



12/16/2020 5:54:18 PM

Method: Fe-30
Comment: Cr-, Cr/Ni-steel
Type Standard 18--8

Type corr.concentr.

12/16/2020 5:54:09 PM

Sample Name:

Sample ID:

	C	Si	Mn	P	S	Cr	Mo	Ni
	%	%	%	%	%	%	%	%
< x > (1)	0.0224	0.8873	1.1010	0.0263	0.0032	21.6796	3.0718	5.5691

	Al	Co	Cu	Nb	Ti	V	W	Pb
	%	%	%	%	%	%	%	%
< x > (1)	< 0.0005	0.0797	0.1603	< 0.0002	0.0044	0.0893	0.0305	< 0.0002

	Sn	Sb	B	N	Fe			
	%	%	%	%	%			
< x > (1)	0.0092	< 0.0004	0.0024	0.1024	67.1600			


4.InstalaciónInstruccionesporSBMvidrioespiga-



fixing method: base plate spigots

Mark out the centre line of proposed glass fence with a chalk line. Determine clamp location based on a sheet size (recommendation on pages 1 & 2). Use base plate as a template to mark out the hole positions and drill holes to suit.


Note: Do not exceed 100mm gaps between glass panels. Optimum gap is 40mm to 60mm

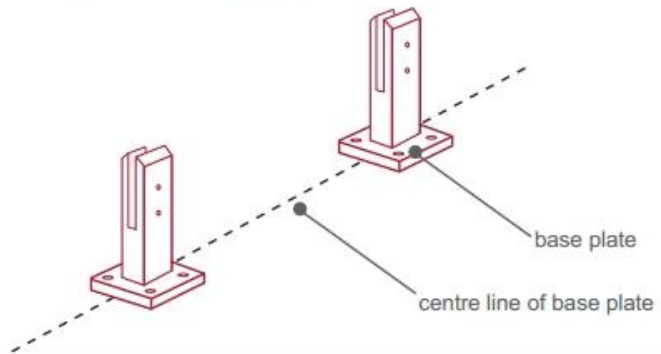

Now the base plated spigots can be fitted to the floor and plumbed via shims (not supplied) under the base plates. Be sure to tighten firmly as the smallest of movement at the base plate will result in noticeable movement at the bottom of the glass fence.


Tip: By setting the two outer spigots of your total span, a string line can be run in the 'throat' of the span, giving correct height for all spigots in between

Note: Do not exceed 100mm gap from the fixing surface to the bottom of the glass

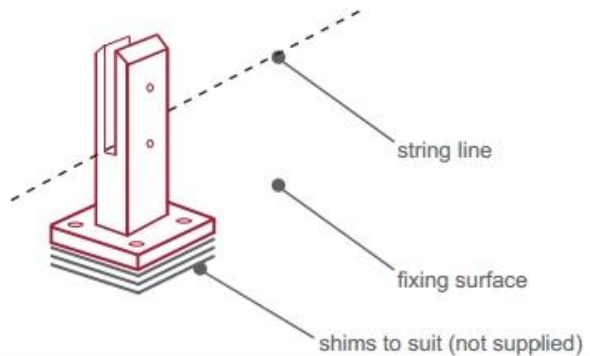

When all spigots are installed, slip domical cover the top of the spigot to hide fixings. It will be necessary to turn the adjustment screws on the spigot face all the way in to allow cover to pass over


Note: Same installation method applies to round base plate spigot



The glass is then installed to the spigots. Place plastic packers between glass & spigot, at no stage should glass touch the metal

How adjustability works:

1. Place glass in spigot
2. Fix/ tension glass both sides with allen key

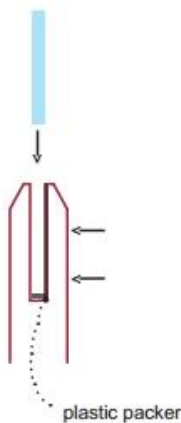


5. Embalaje de detalles por SBM-

1 PC en una caja blanca; 12 PC en un carton-



6.MasaProducciónProcesoporSBMvidrioespiga-



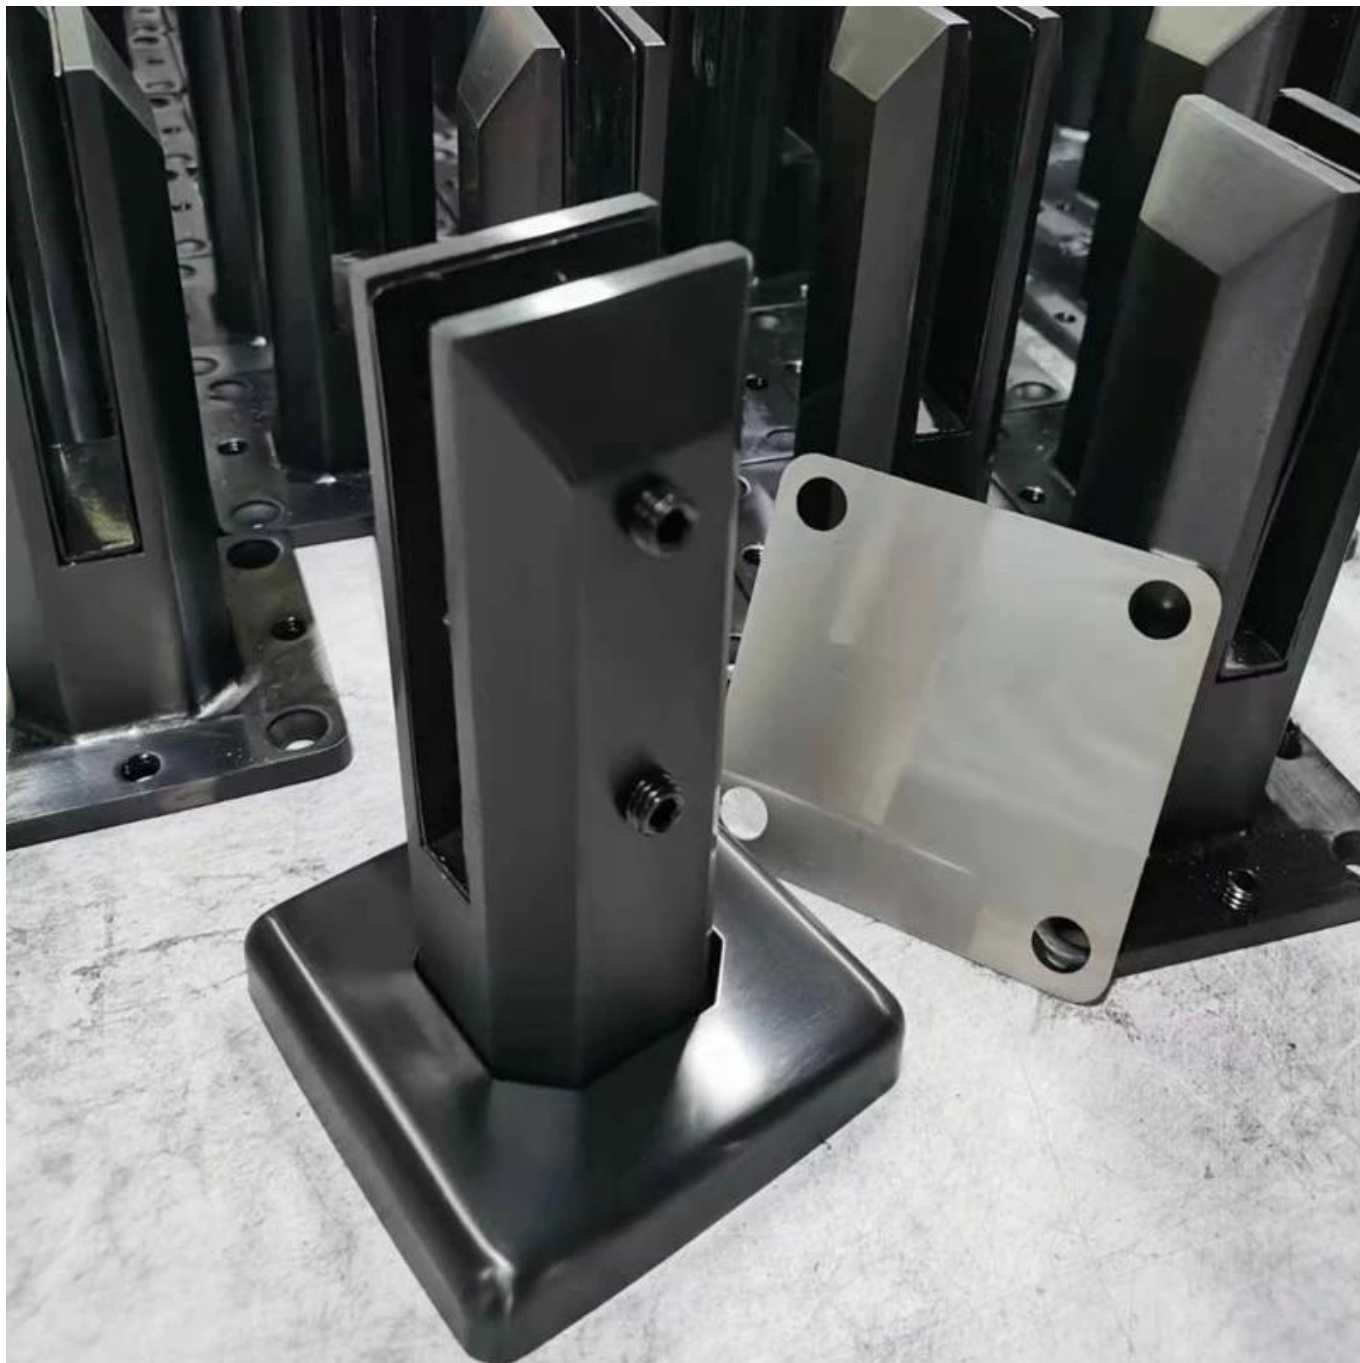

7. Más modelos de vidrio espiga portuselección-





MODEL # SBM



MODEL # SCM



MODEL # RBM



MODEL # RCM


Glass spigot

8. Proyecto fotos de sin marco Vidriobarandillas con vidrio espigas-







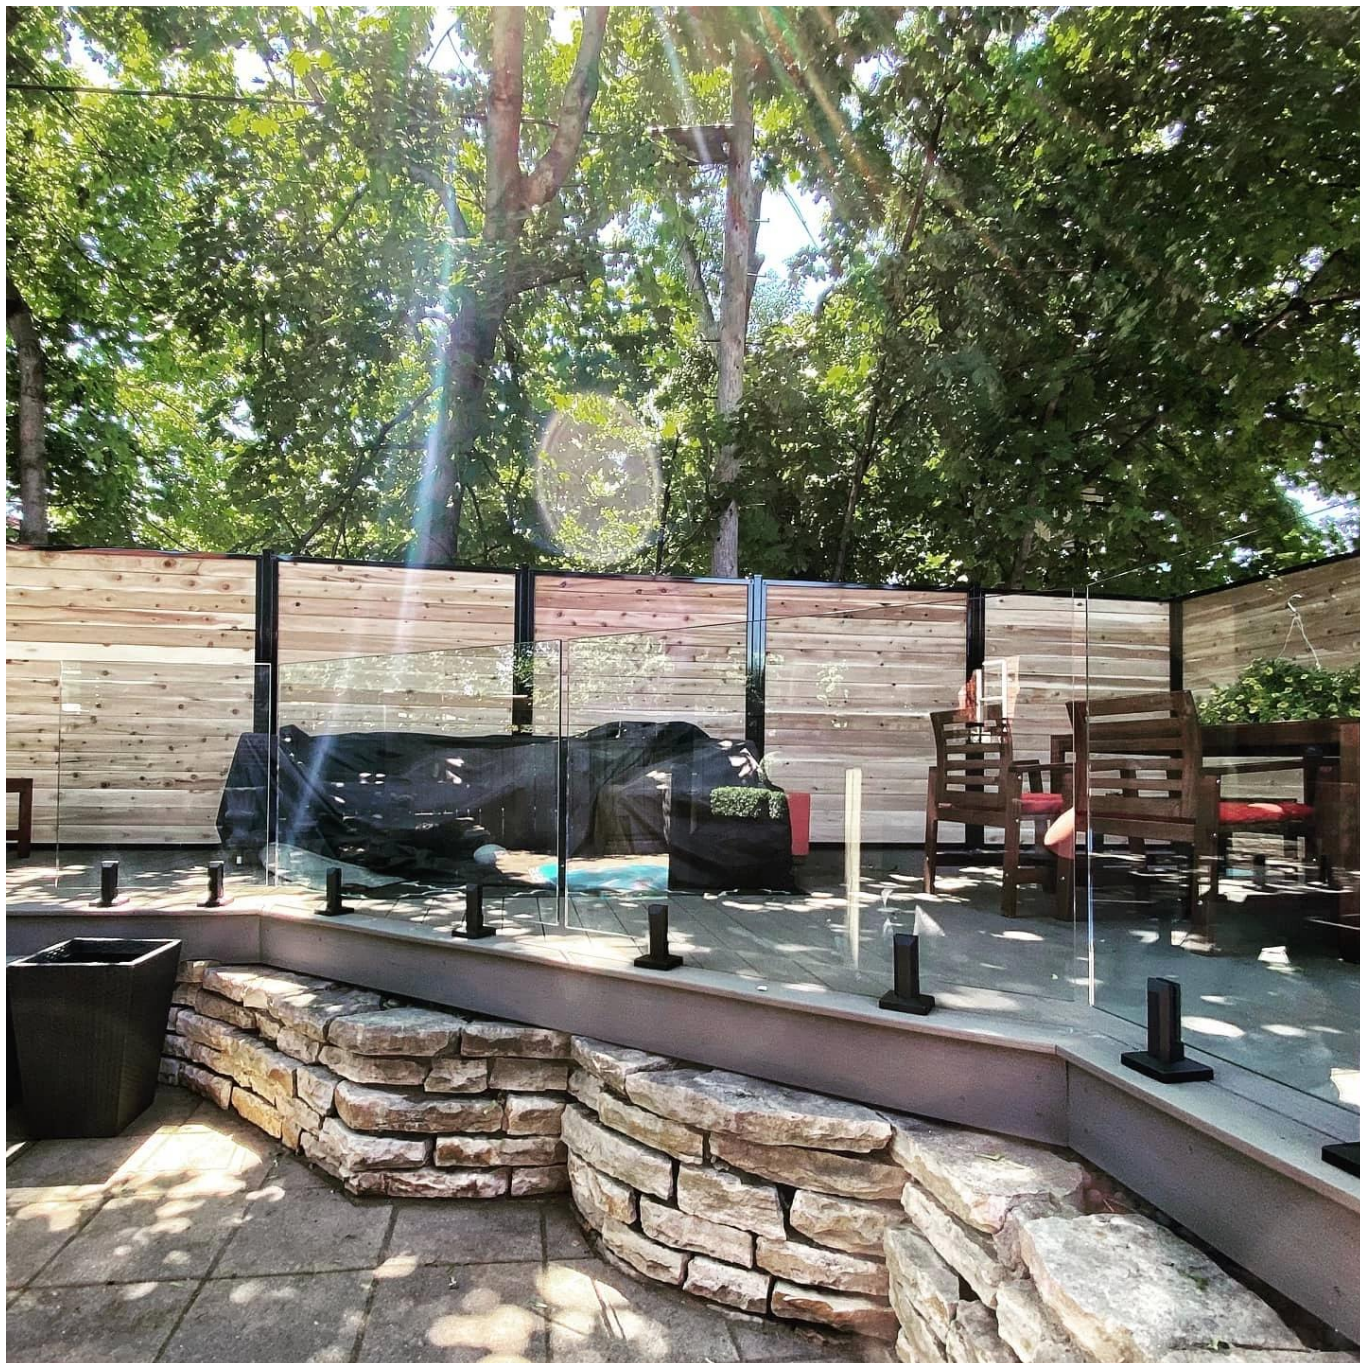

También tenemos la bisagra de cristal y cierres magnéticos y abrazaderas de vidrio y vidrio templado para ir con todo el sistema de cristal sin marco barandilla.

No dude en contactar con nosotros para obtener cotizaciones!

Lanzamiento de Shenzhen Co., Ltd

Verificado por SGS, Informe No. 19536352_P + T

Oficina de complemento:

B5-003, 5 / F-Block 3, Yilida Building, No. 1092 Nanshan Road, El distrito de Nanshan, Shenzhen, China, código postal 518054

Tel: 86-755-86037559 Fax: 86-755-86372611

MOB (WhatsApp, WeChat, Viber) 86 135 9027 3543

Contacto:CeliaChen