


Kiina valmistaa ruostumattomasta teräksestä valmistettuja lasilevyjä




1	Materiaali ja viimeistely	304/316 ruostumaton teräs; Satin viimeistely tai peili
2.	Korkeus	1000mm / mukautettuja kokoja
3	Stucheon Post	D50,8 * 1,5 (mm) putki; 4-suuntainen säädettävä ylempi rautateiden kannatin; Neliö tai pyöreä lasin puristin.
4	Top rautatie.	D50.8 * 1,5 (mm) Kaapeliputki
5	Turvallisuuskaide	10 mm / 12mm läpinäkyvä karkaistu lasilevy
6	Käytö e Sijainti	Balateria, kaiteet, kaiteet, aita, kaide, kaiteet; Parveke, silta, silta, puutarha, patio, uima-allas, kuisti, portaikko, terassi
7	Asennus	Top / Side asennettu
8	Paketti	EPE + Sisäkenttä + pahvi

TuoteNäytä

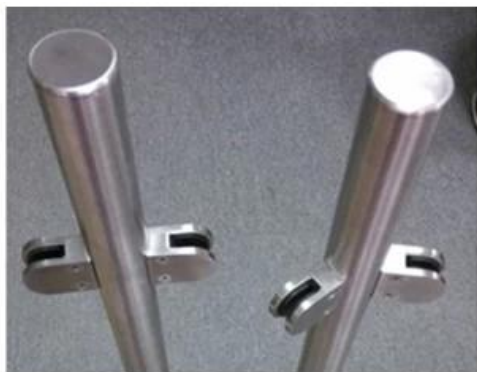


TekninenPiirustus





LCH-106

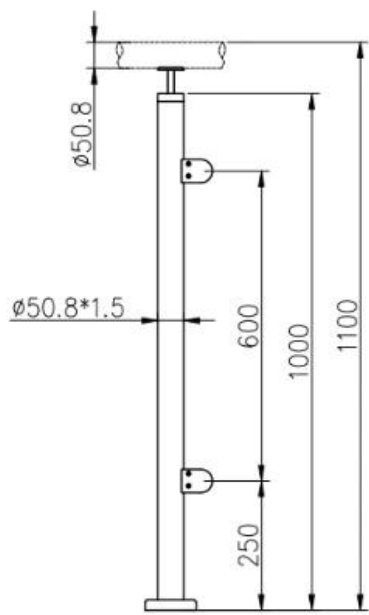

LCH-107

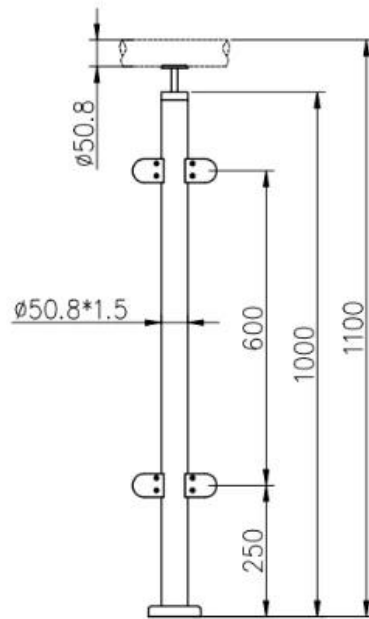


LCH-108

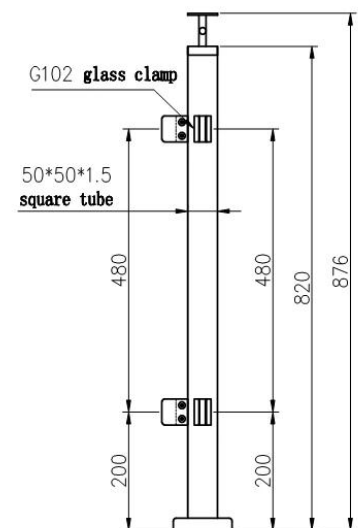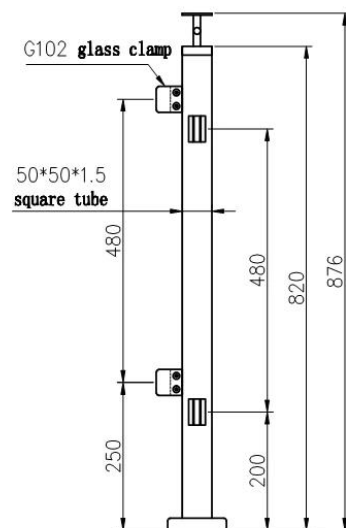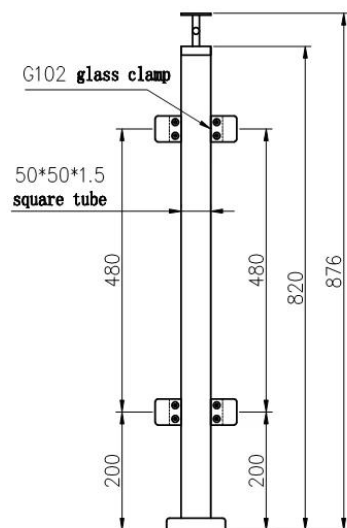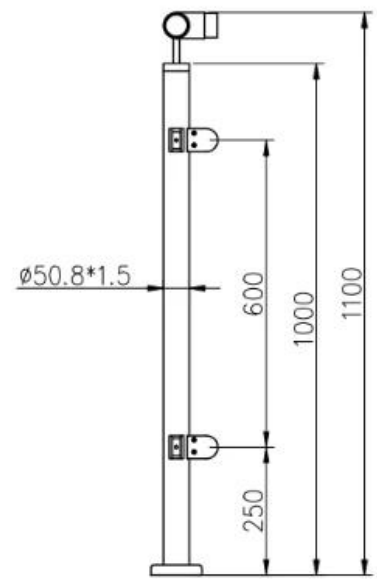

Asennus:


Glass Clamp Installation Guide

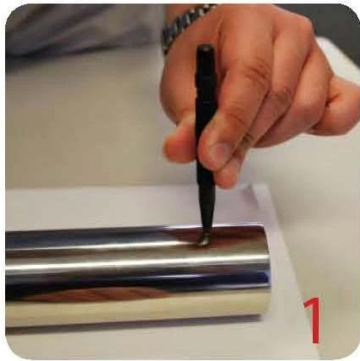

Mark and centre punch desired location of blind rivet nut location.



Drill centre punched hole in tube to suit blind rivet nut.

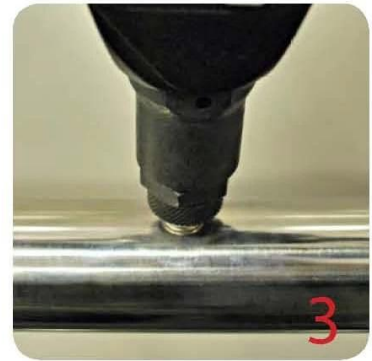

Insert blind rivet nut into tube and fasten with blind rivet tool.



Check installed blind rivet nut is secure and ready for install.



Align half glass clamp with blind rivet nut inline position. Screw in button head cap screw into thread and tighten with hex key.



Select appropriate rubber gasket to suit glass panel thickness. Install rubber gasket into both sides of glass clamp. (Note rubber gasket marked with sizes).



If heavier clamping load is required please use supplied glass clamp pin, during the install process. Note glass panels will require drilling in order to fit glass clamp pins.



Fit glass panel into position, install second half of glass clamp secure with provided hex screws.



Tighten glass clamps with hex key, and check glass panel are secure with no movement.

Projekti Näytä:

Kiina valmistaa ruostumattomasta teräksestä valmistettuja lasilevyjä





Tervetuloaota yhteyttä minuun Lisätietoja:
Wendy: sales04@launch-china.cn.
HP / WhatsApp / Wechat: +8615989339827