
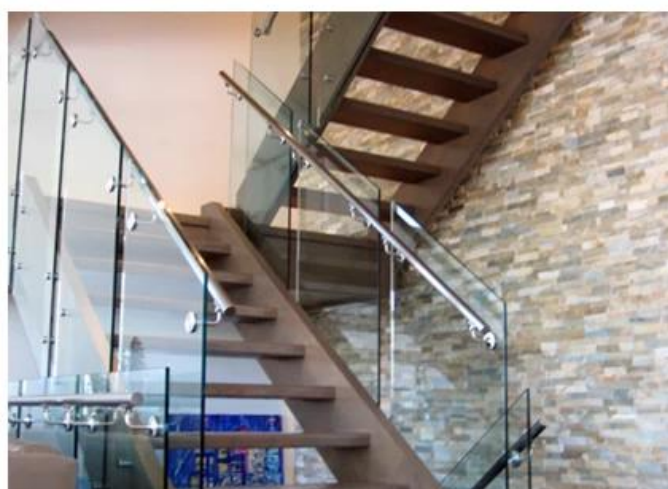
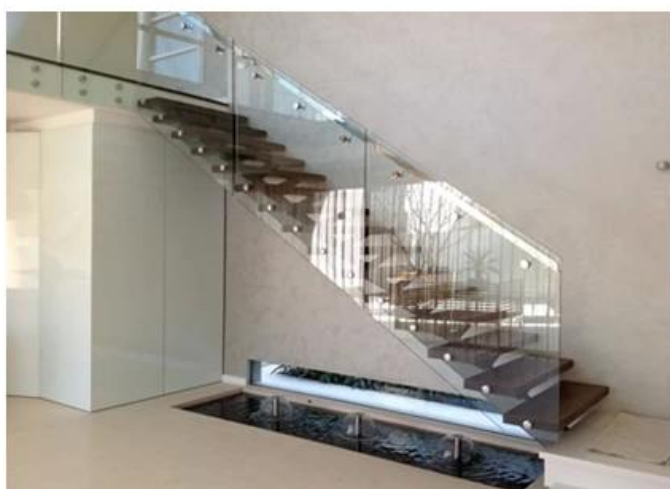
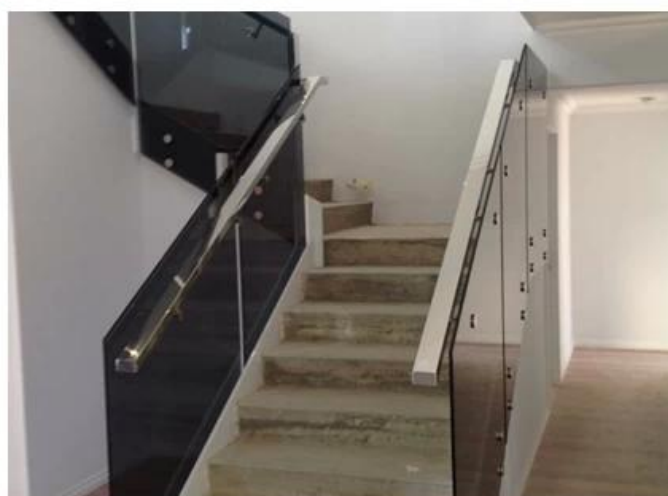


Onze hot-verkoop glas trap traliewerk designs:

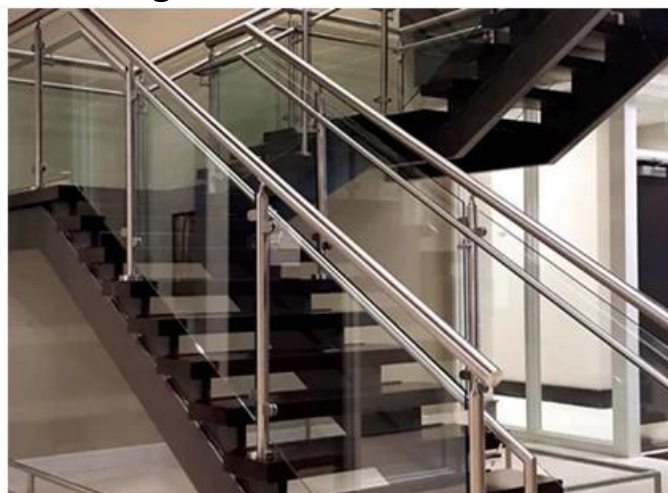


Moderne binnenste trap met leuning met trapleuning

1	Materiaal & Af hebben	Roestvrij staal 304/316; Satijn of spiegel afwerking
2	Hoogte	1000 MM / aangepast formaat
3	Staanderpaal	D50,8 * 1,5 (mm) buis; In 4 richtingen verstelbare bovenste railbeugel; Vierkante of ronde glazen klem.
4	Bovenste rail	D50.8 * 1.5 (mm) Holle buis
5	Beveiligingsleuning	10 mm / 12 mm paneel van gehard helder glas


6	Gebruik & Plaats	Baluster, Balustrade, Leuning, Omheining, Leuning, Leuningen; Balkon, brug, terras, tuin, terras, zwembad, veranda, trap, terras
7	Installatie	Boven / zijkant gemonteerd
8	Pakket	EPE + binnendoos + doos
9	Service	1, bijpassende accessoires en fittingen zijn aanwezig; 2, bouwplanning; 3, professionele ingenieursadviezen; 4, installatie gids; 5, OEM, ODM, klantontwerp;
10	Contact	EMAIL, SKYPE, WhatsApp, WeChat en QQ worden als watermerk weergegeven op onderstaande afbeeldingen




LCH-106

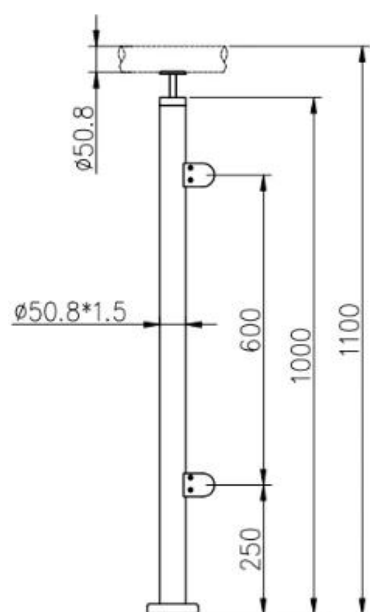

LCH-107

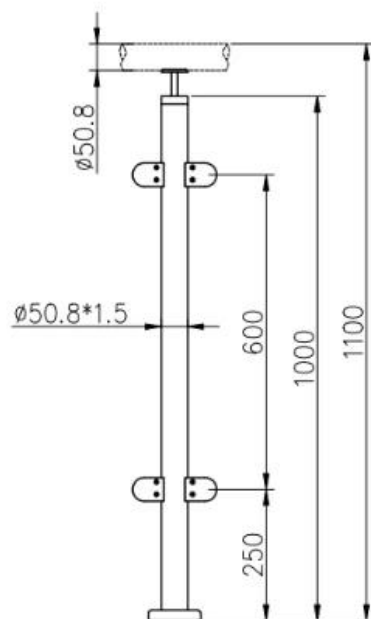


LCH-108

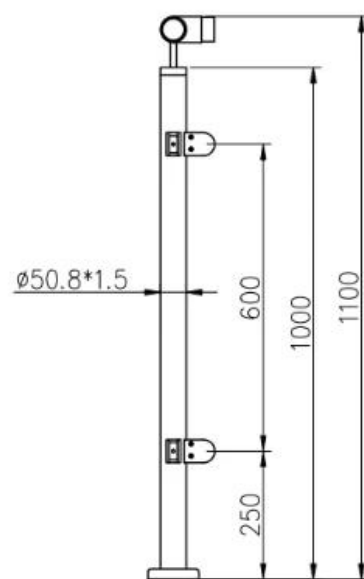

Installatie:


Glass Clamp Installation Guide

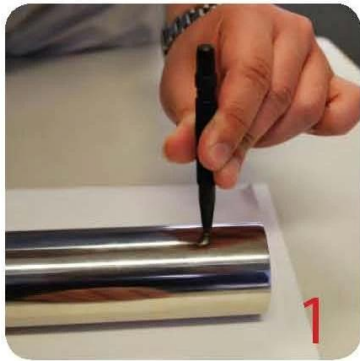

Mark and centre punch desired location of blind rivet nut location.



Drill centre punched hole in tube to suit blind rivet nut.

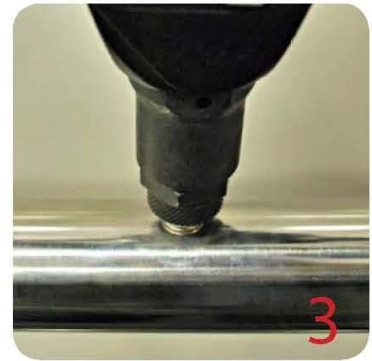

Insert blind rivet nut into tube and fasten with blind rivet tool.



Check installed blind rivet nut is secure and ready for install.



Align half glass clamp with blind rivet nut inline position. Screw in button head cap screw into thread and tighten with hex key.



Select appropriate rubber gasket to suit glass panel thickness. Install rubber gasket into both sides of glass clamp. (Note rubber gasket marked with sizes).



If heavier clamping load is required please use supplied glass clamp pin, during the install process. Note glass panels will require drilling in order to fit glass clamp pins.




Fit glass panel into position, install second half of glass clamp secure with provided hex screws.





Tighten glass clamps with hex key, and check glass panel are secure with no movement.

Projectshow



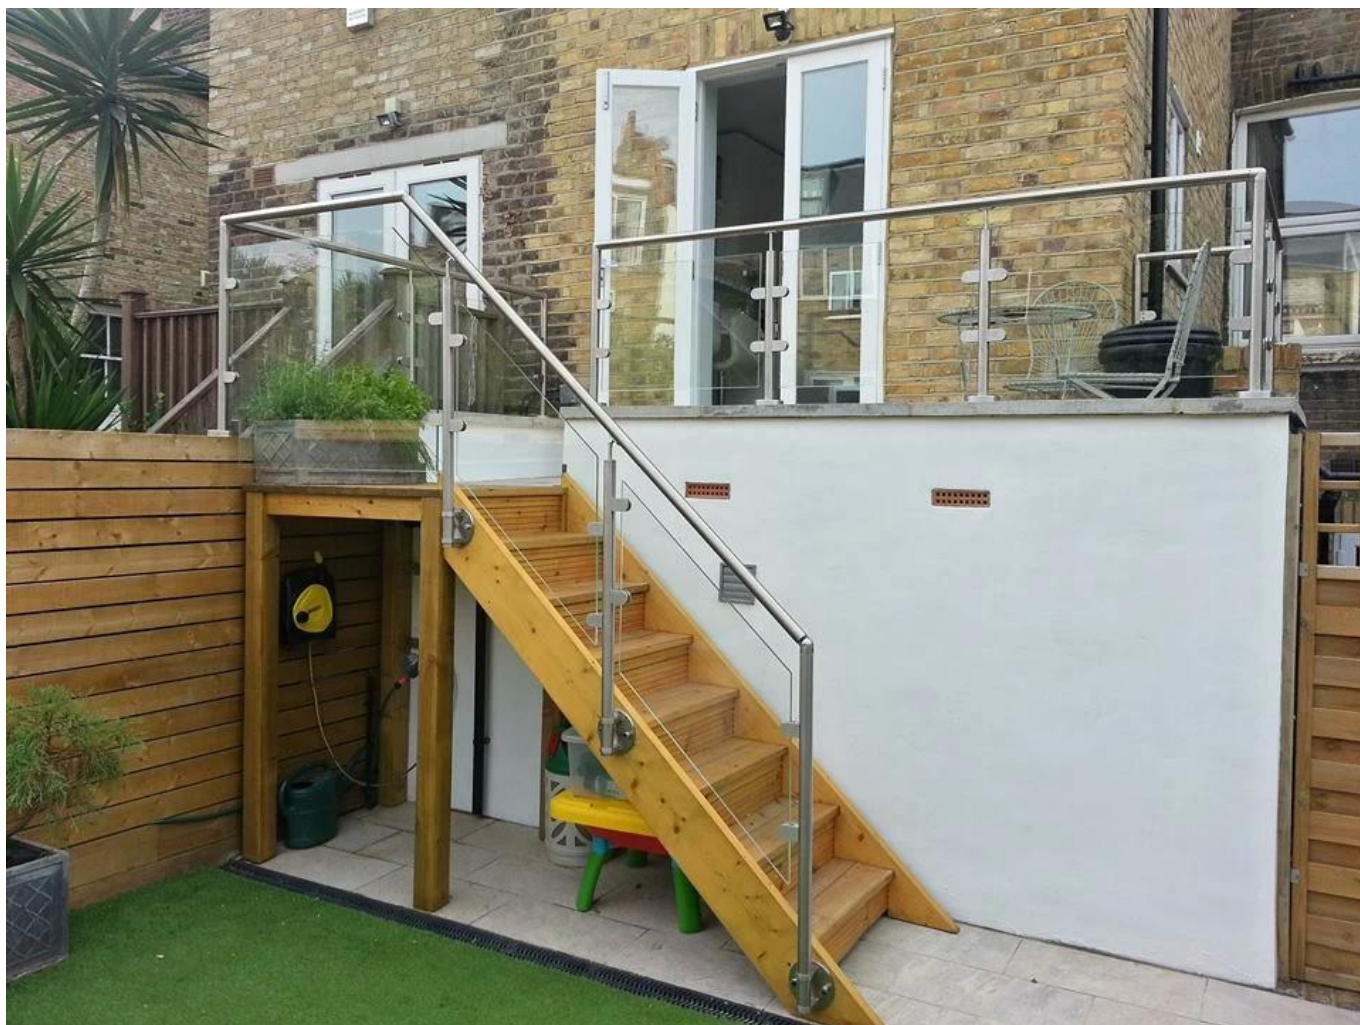

Voor balkon traliewerk designs:

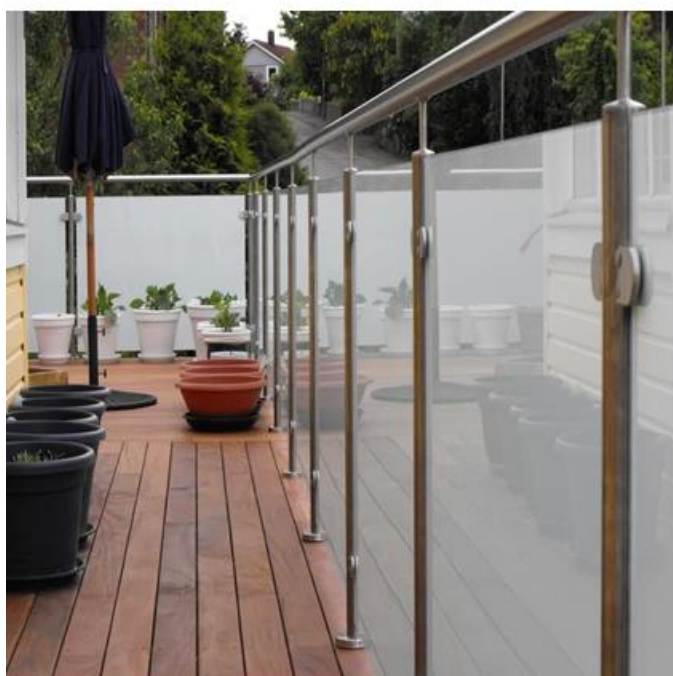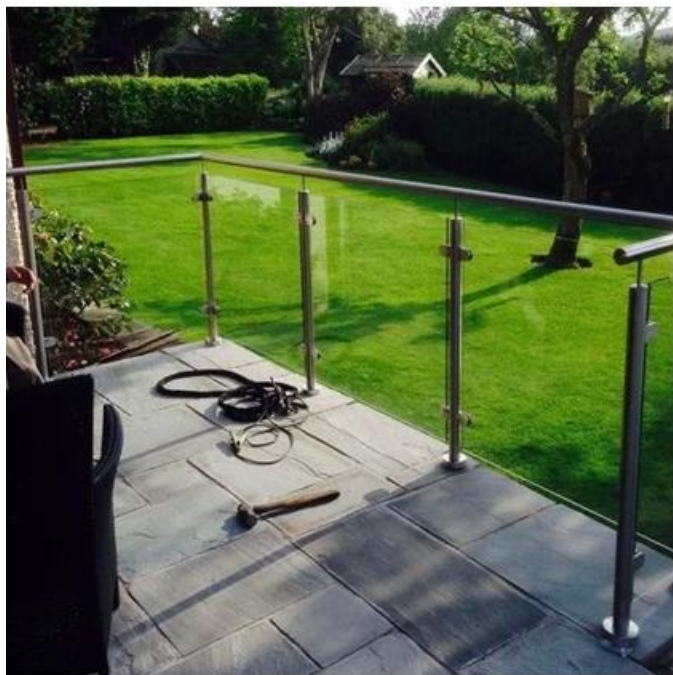

Voelen gratis naar contact ons:
Eve Chow
sales03@launch-china.cn
HP / WhatsApp: +8615907334556